

Corridor #41
Martin Luther King Jr Blvd
Broadway to Fruitridge Rd

Jurisdiction:
City of Sacramento





Corridor Length:
1.5 miles

Number of Stops:
 0 – No Changes Needed
 11 – Minor/Moderate Changes Recommended
 1 – Major Changes Needed – Not Currently Feasible
 1 – crossings needed


Total Cost:


\$184,500	Design, project approvals
\$212,000	Construction
\$396,500	Total

Corridor Priority: 3.3

NB MLK Jr Blvd and Broadway (FS)	Priority: 2	Stop ID: 2612 12 on, 9 off
---	--------------------	---


Secure ROW at 3101 MLK Jr Blvd (APN 014-0171-024)
Construct new 4 x 16' concrete pad
Install new bench

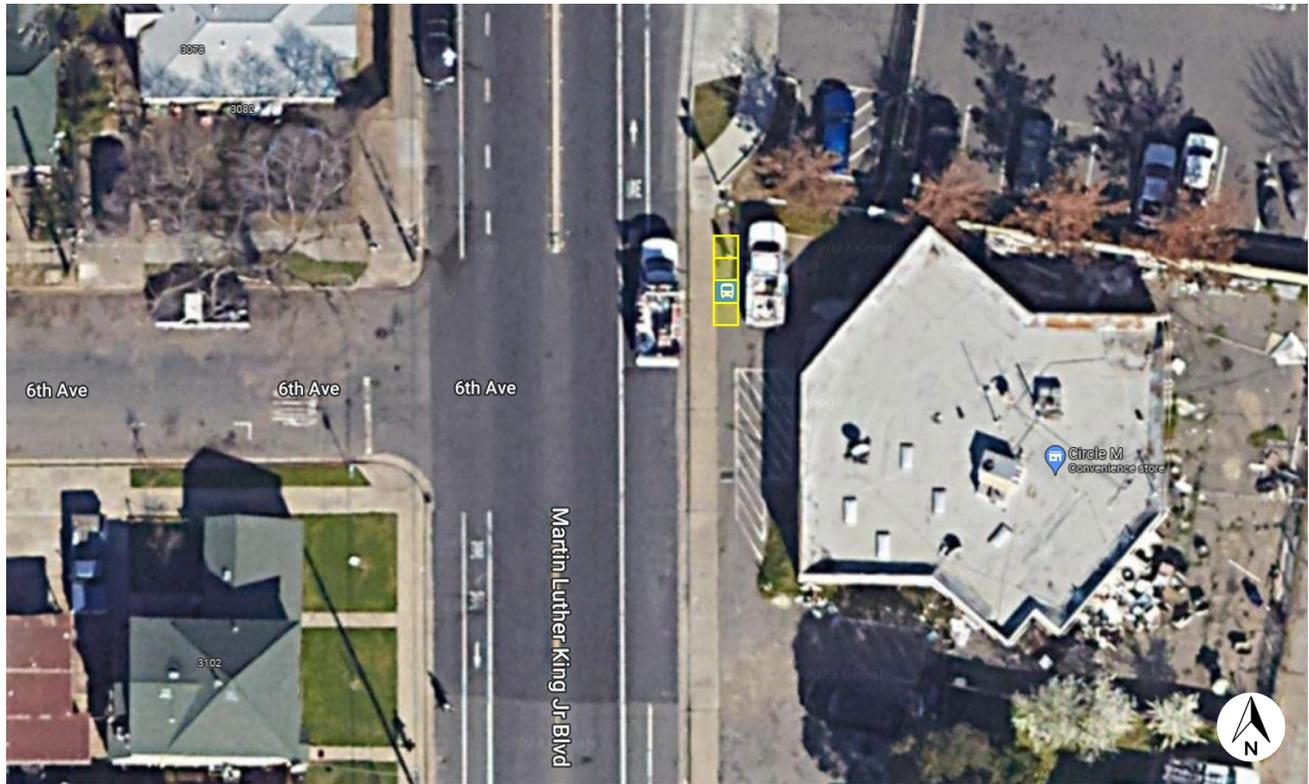

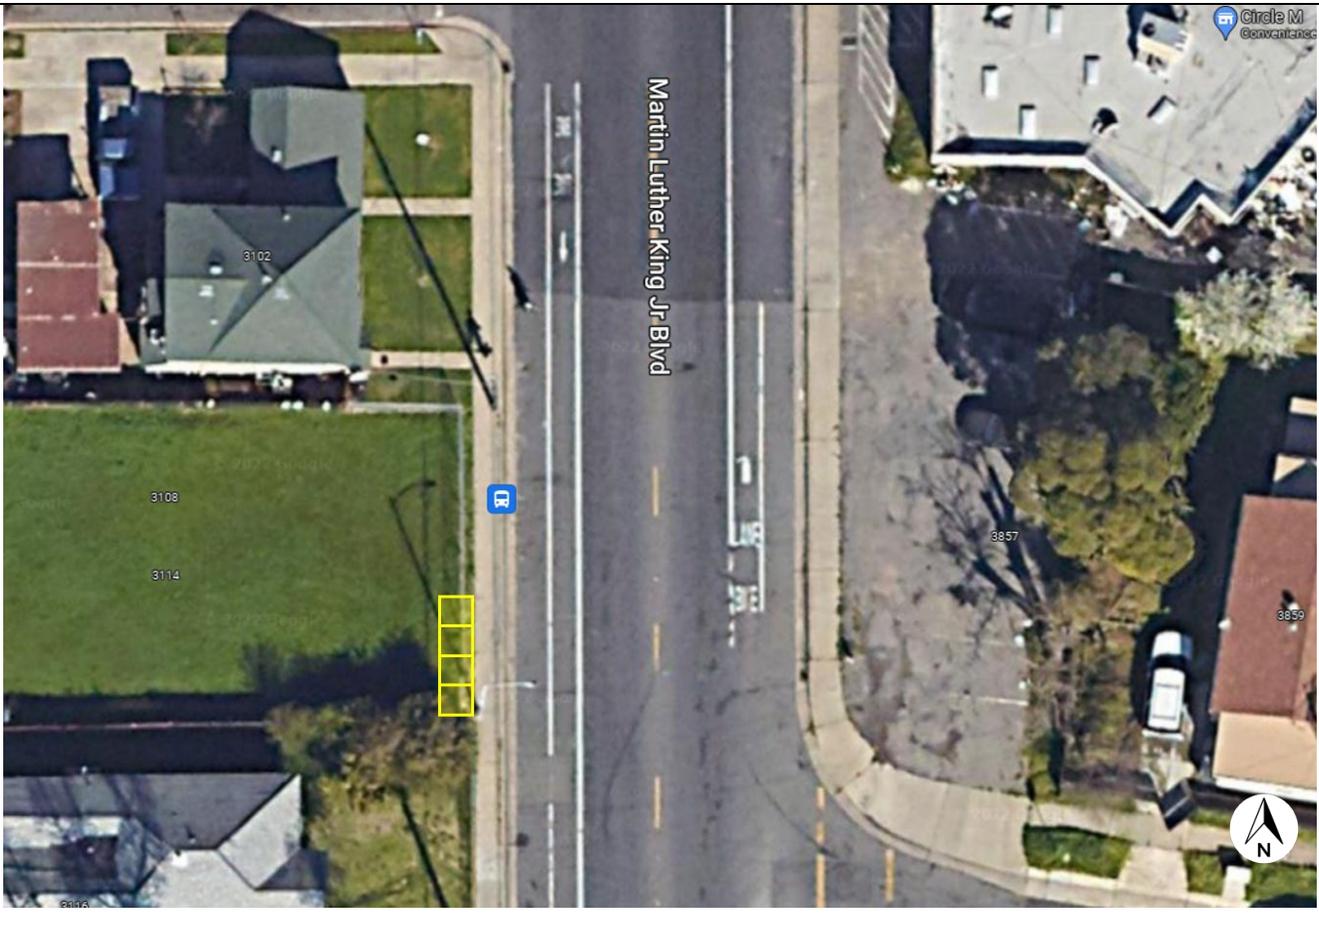SB M L King Jr Blvd & 7th Ave (FS)	Priority: 2	Stop ID: 1933 4 on, 8 off
Secure ROW at 3114-3108 MLK Jr Blvd (APN 013-0302-040) Construct new 4 x 16' concrete pad		
 An aerial photograph of a residential street, Martin Luther King Jr Blvd, oriented vertically. The street is paved and has a yellow rectangular area marked on the left side, indicating the proposed bus stop location. To the left of the street is a grassy area with several houses, some with property numbers 3102, 3108, and 3114. To the right of the street are more houses, with property numbers 3857 and 3859 visible. A blue bus stop sign icon is located on the left side of the street near the yellow area. A north arrow is in the bottom right corner of the image. The text 'Martin Luther King Jr Blvd' is written vertically along the street.		

NB M L King Jr Blvd & 9th Ave (MB)	Priority: 5	Stop ID: 2611 11 on, 5 off
---	--------------------	---

Secure ROW at 3425 MLK Jr Blvd (APN 014-0202-022)
Construct new 4 x 16' concrete pad behind sidewalk
Install a new 8' transit shelter and bench

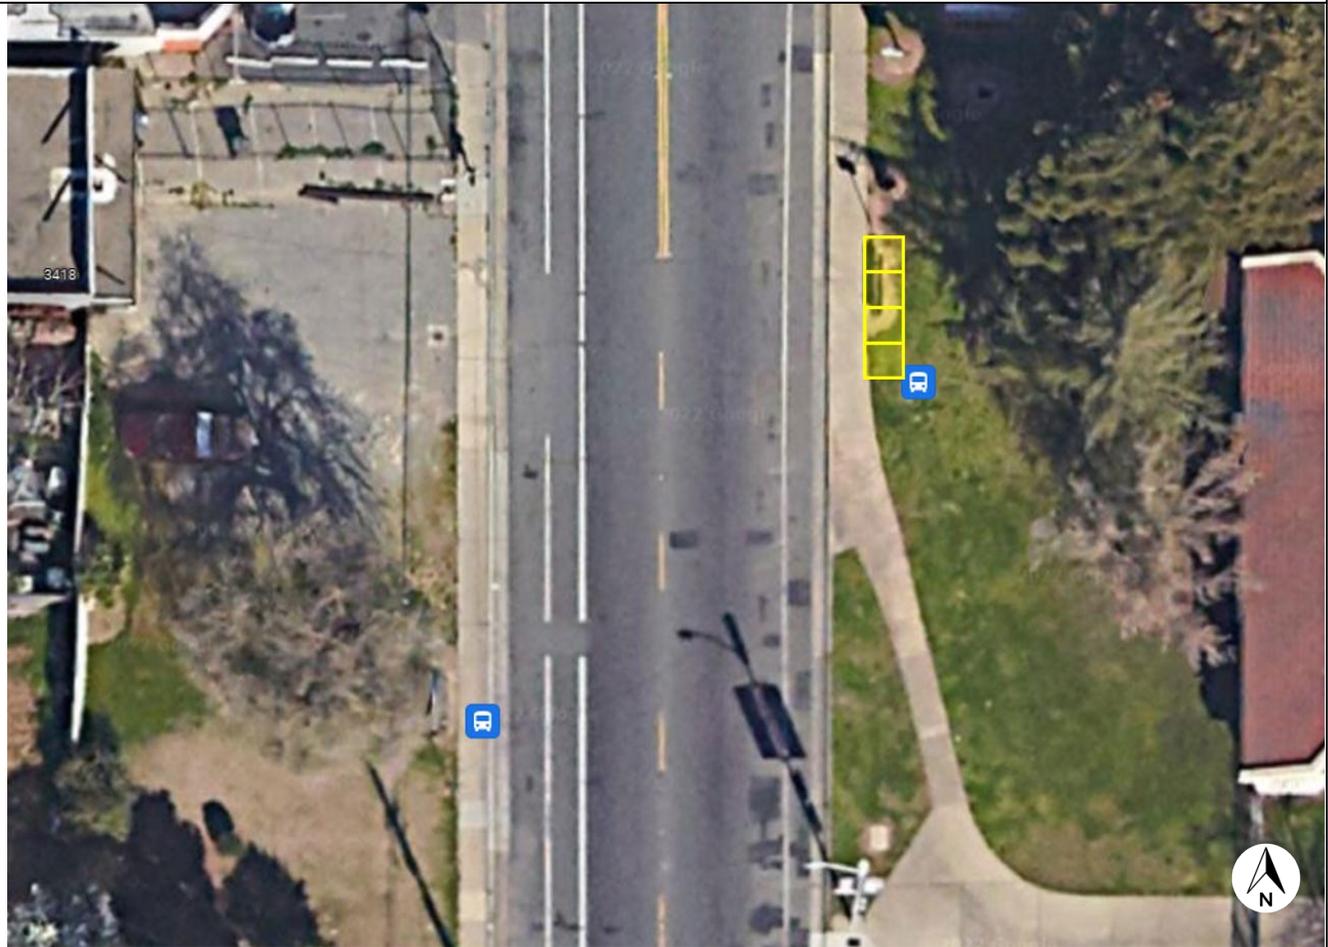


SB M L King Jr Blvd & 9th Ave (MB)	Priority: 4	Stop ID: 1934 10 on, 10 off
---	--------------------	--


Secure ROW at 3425 MLK Jr Blvd (APN 014-0202-022)
Construct new 4 x 16' concrete pad behind sidewalk
Install a new 8' transit shelter and bench
Consider new crossing or relocating bus stop (out of scope)



SB M L King Jr Blvd & 12th Ave (NS)	Priority: 5	Stop ID: 1935 3 on, 4 off
Relocate nearside 12 th Ave – appx. 100 feet Secure ROW at 3668 MLK Jr. Blvd (APN 013-0403-044) Construct new 4 x 16' concrete pad behind sidewalk Replace existing 20' driveway curb cut with new vertical curb/gutter Replace existing 25' driveway curb cut with new vertical curb/gutter Consider new crossing or relocating bus stop (out of scope)		

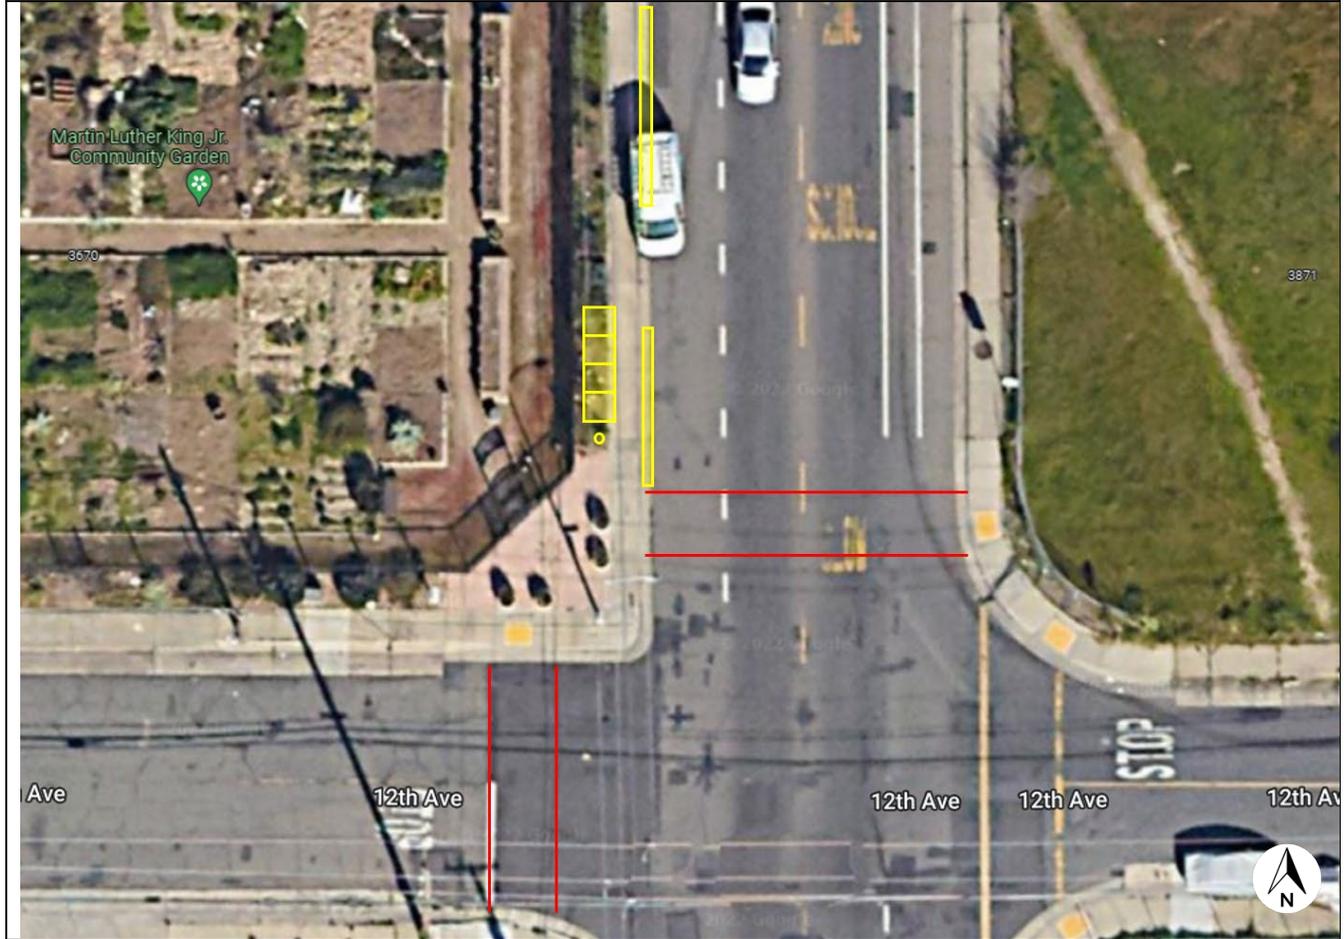



NB M L King Jr Blvd & 12th Ave (FS)	Priority: 2	Stop ID: 2610 10 on, 11 off
Secure ROW at 3701 MLK Jr. Blvd (APN 014-0261-025) Construct new 4 x 16' concrete pad behind sidewalk Install new bench Consider new crossing or relocating bus stop (out of scope)		

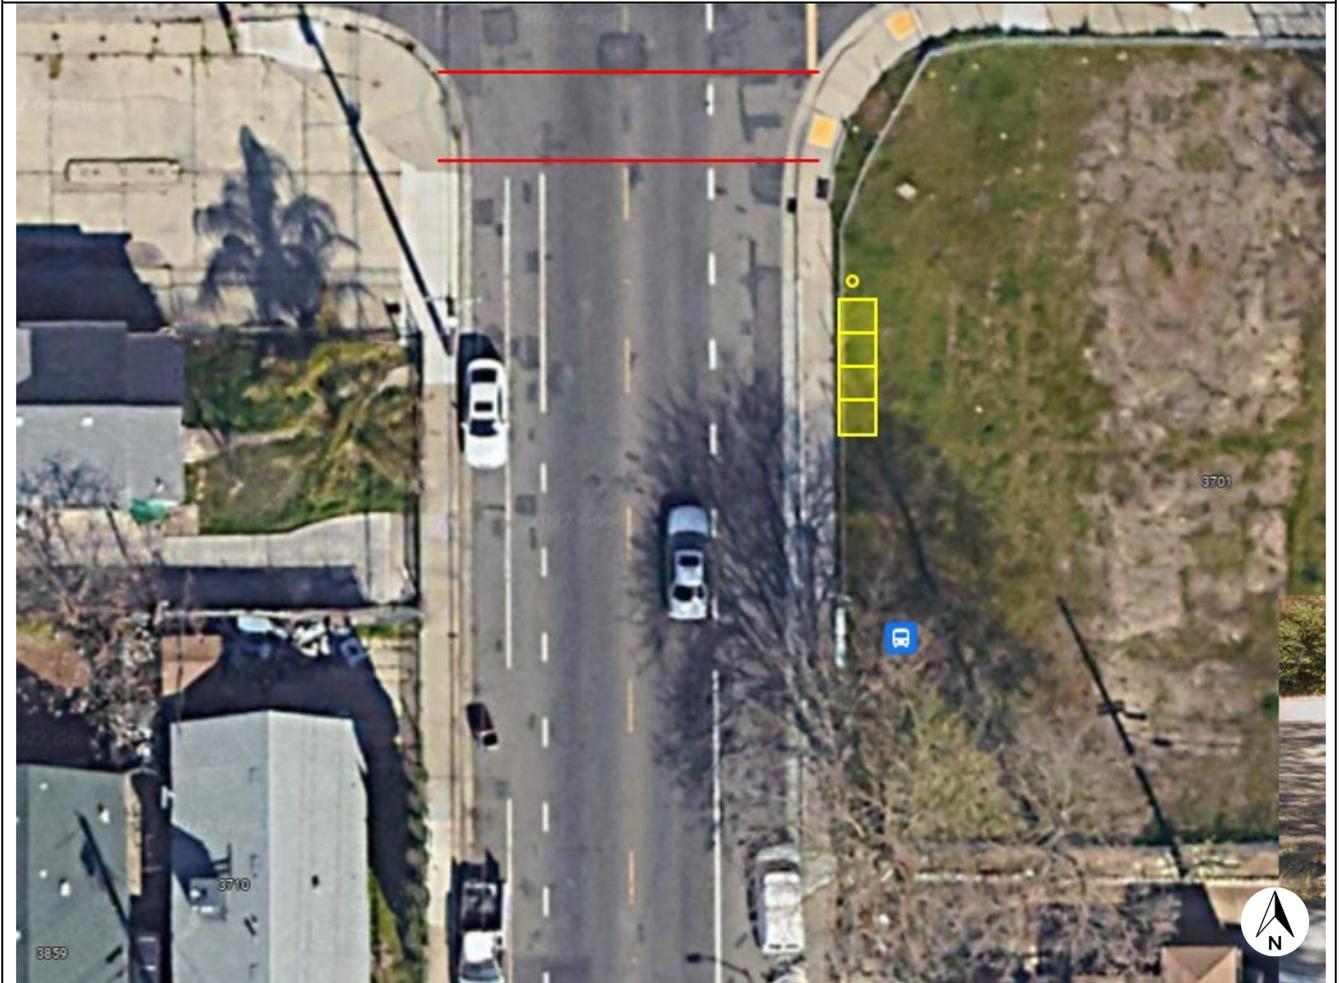

NB M L King Jr Blvd & 23rd St (FS)	Priority: NA	Stop ID: 2609 13 on, 13 off
---	---------------------	--


8-foot sidewalk or landing needed, per standard; however, acquisition of necessary space appears infeasible
Consider new crossing or relocating bus stop (out of scope)

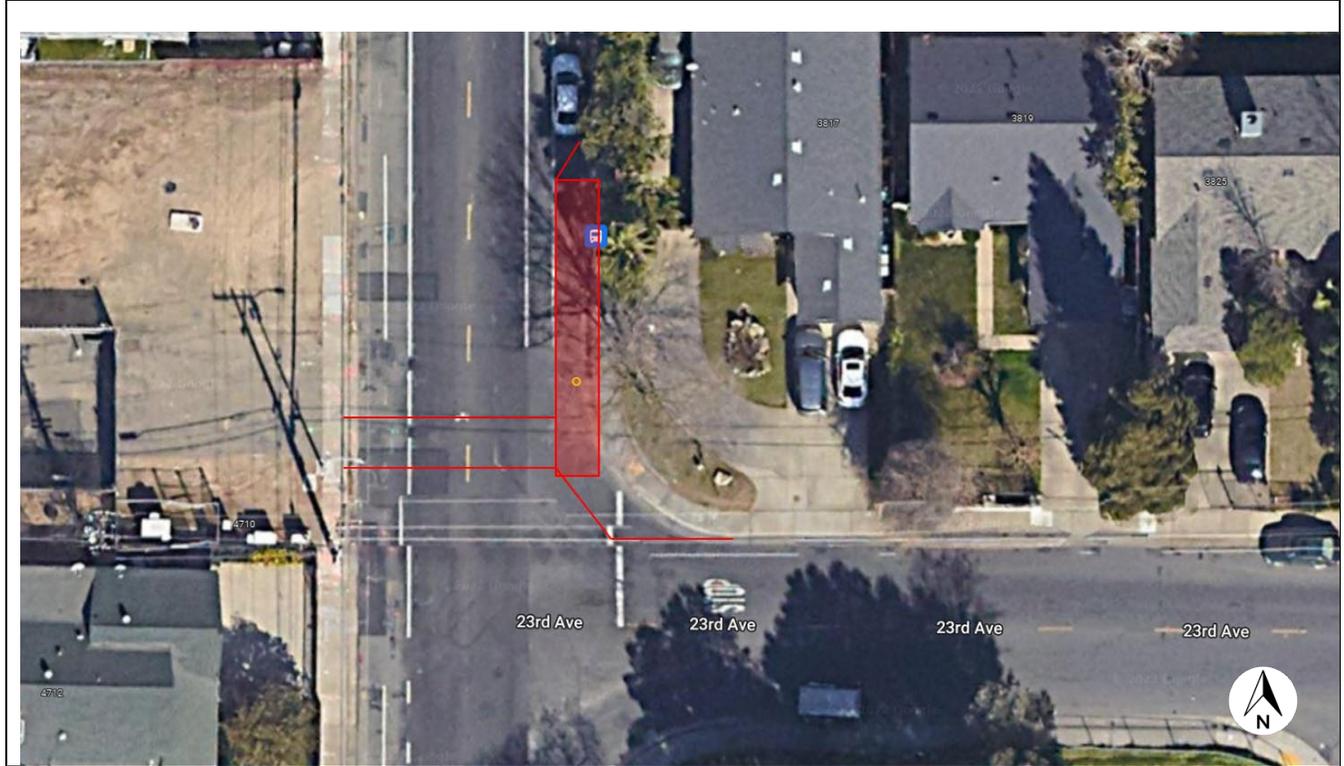

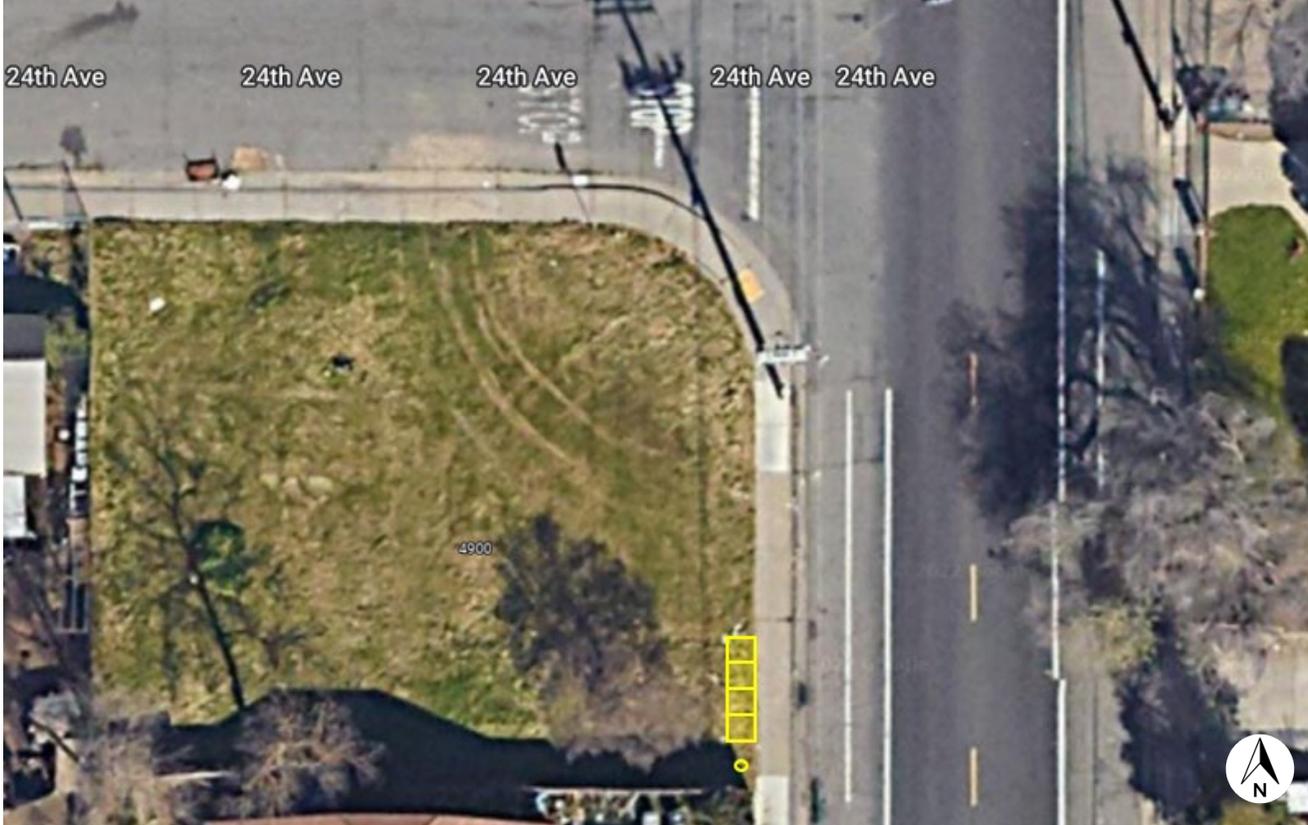SB M L King Jr Blvd & 24th Ave (FS)	Priority: 4	Stop ID: 2585 5 on, 5 off
Relocate far side 24 th Ave Secure ROW at 3823 24 th Ave (APN 022-0024-017) Construct new 4 x 16' concrete pad behind sidewalk Install new pole and sign		
		


NB M L King Jr Blvd & 26th Ave (NS)	Priority: 3	Stop ID: 2608 14 on, 5 off
--	--------------------	---

Secure ROW at 5201 MLK Jr Blvd (APN 022-0300-020)
Construct new 4 x 16' concrete pad behind sidewalk
Install new bench

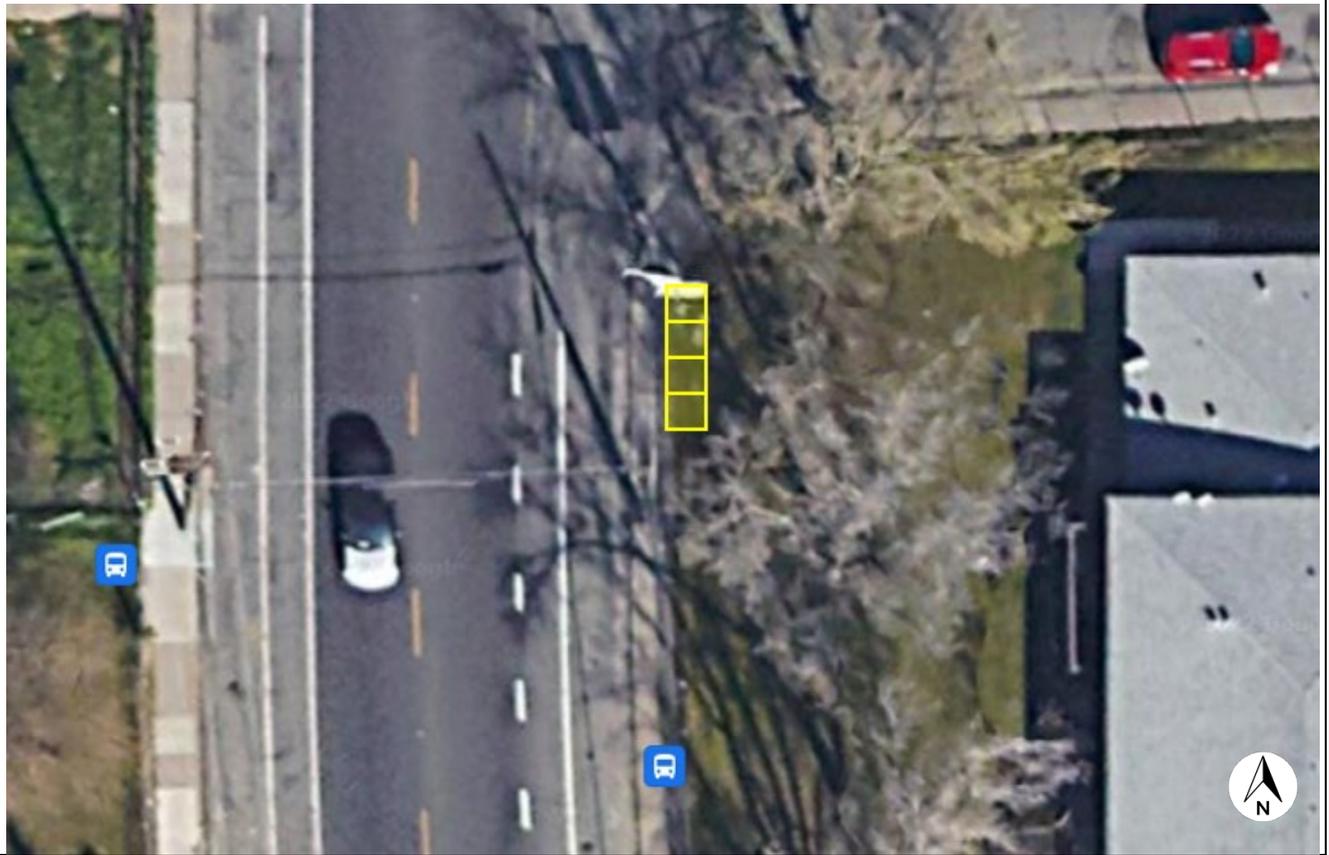

SB M L King Jr Blvd & 26th Ave (FS)	Priority: 1	Stop ID: 2586 5 on, 9 off
--	--------------------	--

Secure ROW at 5126-5130 MLK Jr Blvd (APN 022-0290-001)
Construct new 4 x 16' concrete pad behind sidewalk
Install new post with sign.

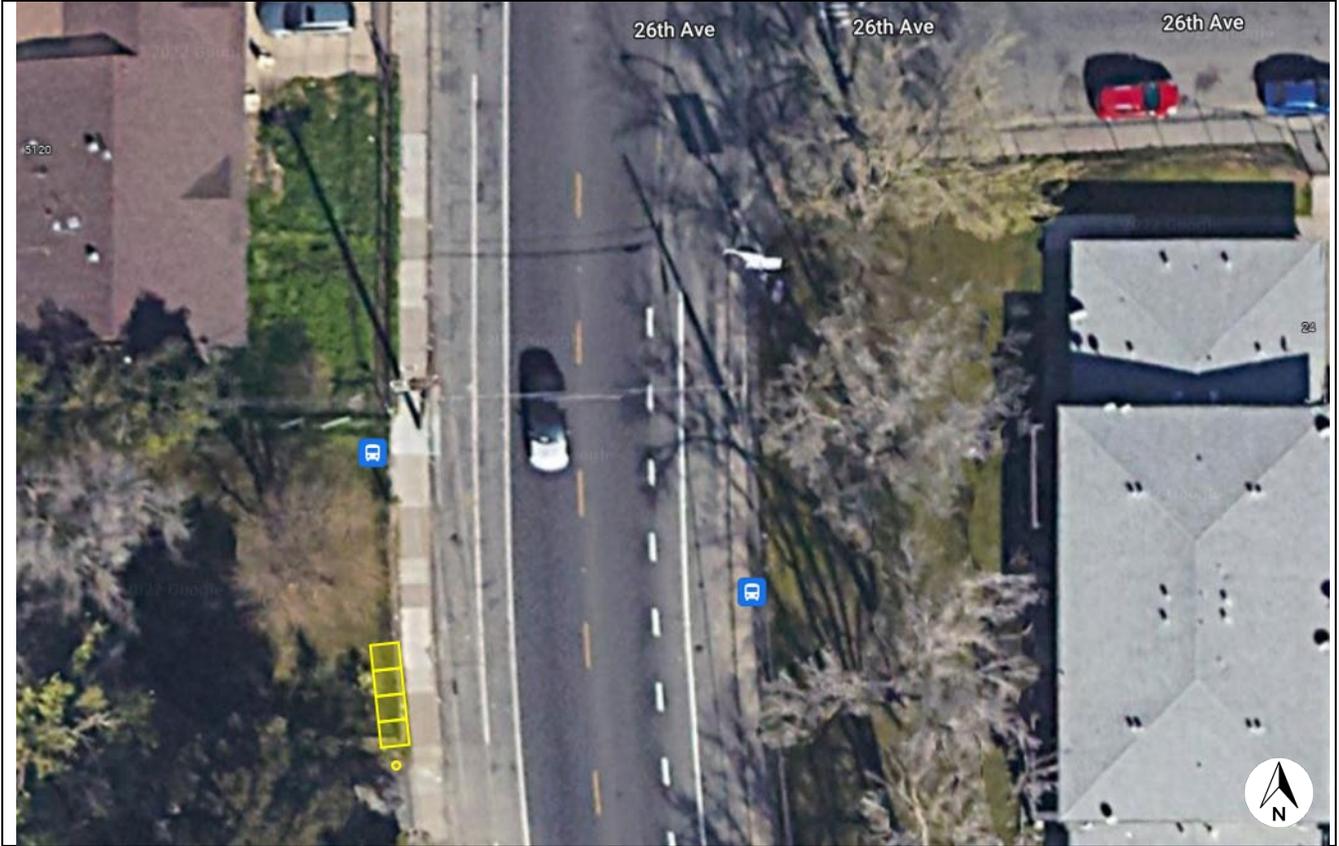


NB M L King Jr Blvd & Fruitridge Rd (FS)	Priority: 4	Stop ID: 2607 14 on, 11 off
---	--------------------	--

Secure ROW at 5551 MLK Jr Blvd (APN 022-0300-004)
Construct new 4 x 16' concrete pad behind sidewalk
Install a new 8' transit shelter and bench




SB M L King Jr Blvd & Fruitridge Rd (FS)	Priority: 4	Stop ID: 2587 17 on, 14 off
---	--------------------	--

Secure ROW at 3846 Fruitridge Rd (APN 026-0300-041)
Construct new 4 x 16' concrete pad behind sidewalk and bollards
Install a new 8' transit shelter and bench
Install new pole with sign

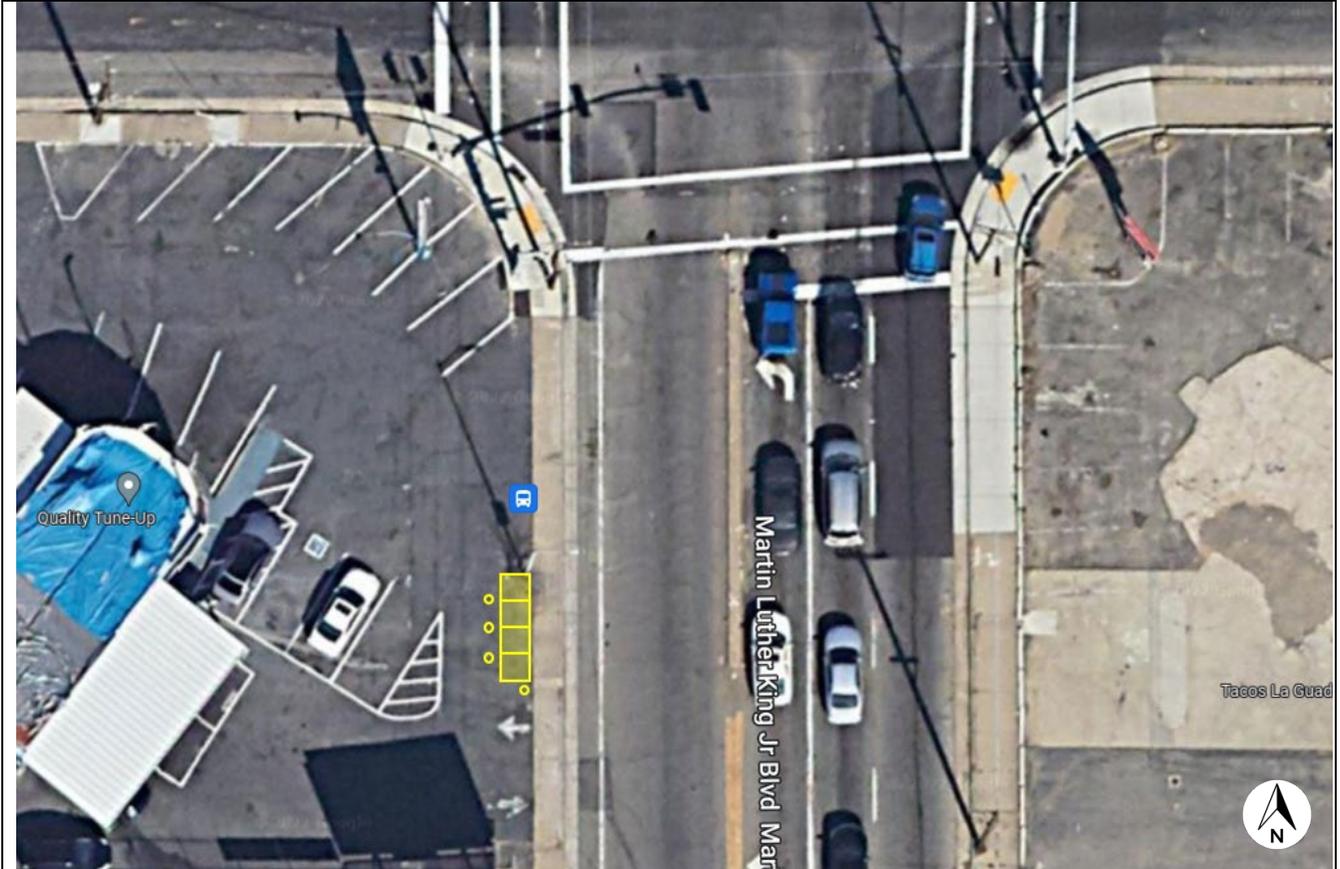

Corridor #42
Martin Luther King Jr Blvd
Fruitridge Rd to 47th Ave

Jurisdiction:
Sacramento County

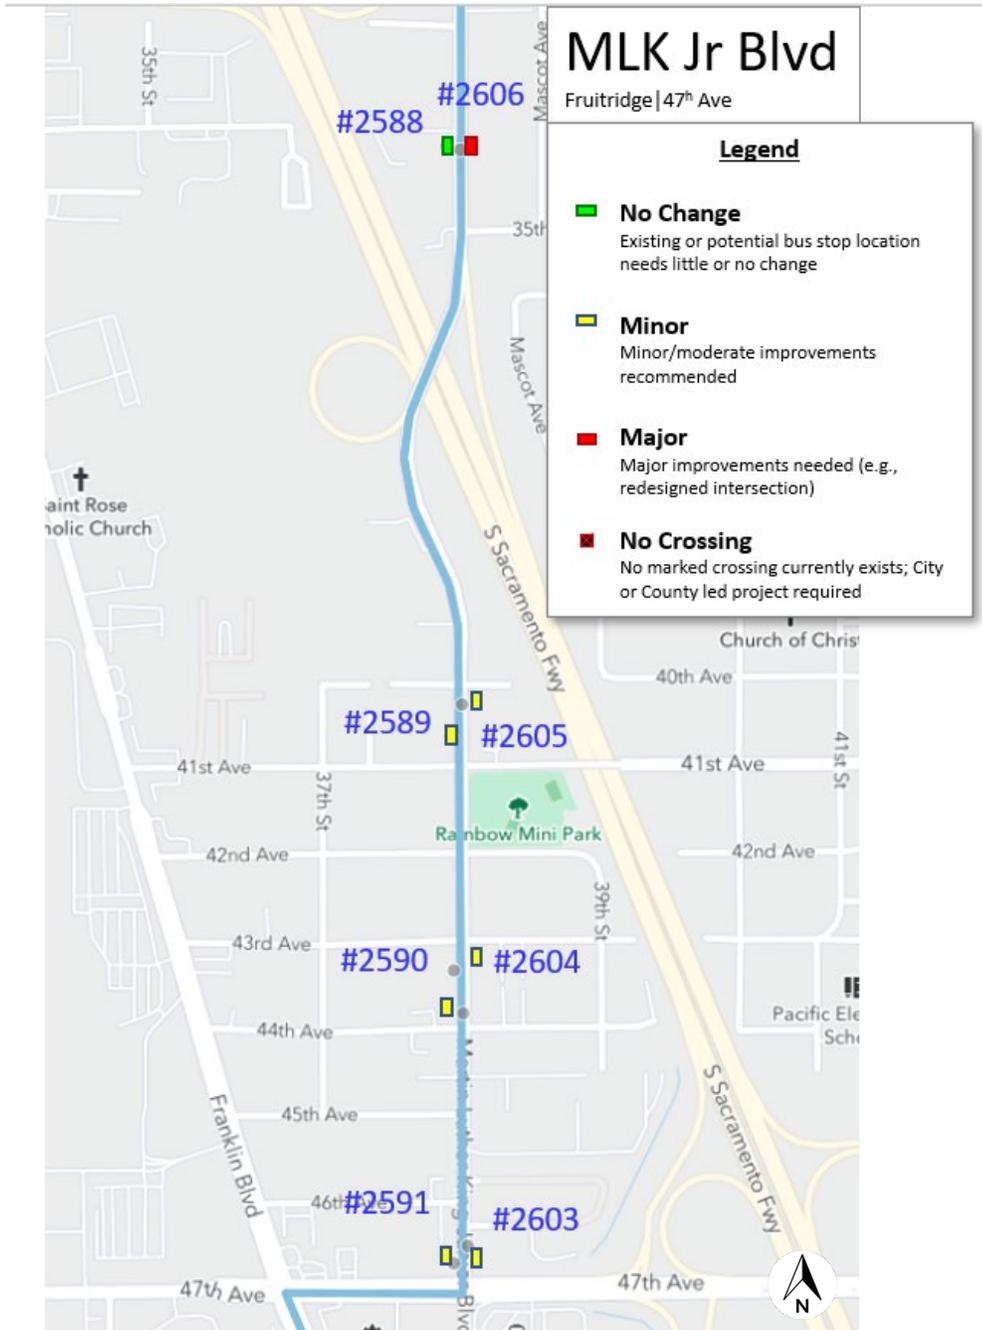

Corridor Length:
1 mile

Number of Stops:
1 – No Changes Needed
6 – Minor/Moderate Changes Recommended
1 – Major Changes Needed – Not Currently Feasible
0 – crossings needed

Total Cost:


\$141,000	Design, project approvals
\$171,000	Construction
\$312,000	Total

Notes:

Corridor Priority: 6.0

NB M L King Jr Blvd & 32nd Ave (MB)	Priority: NA	Stop ID: 2606 2 on, 2 off
--	---------------------	--


Vertical curb needed, per standard; however, ridership may not be sufficient to justify cost

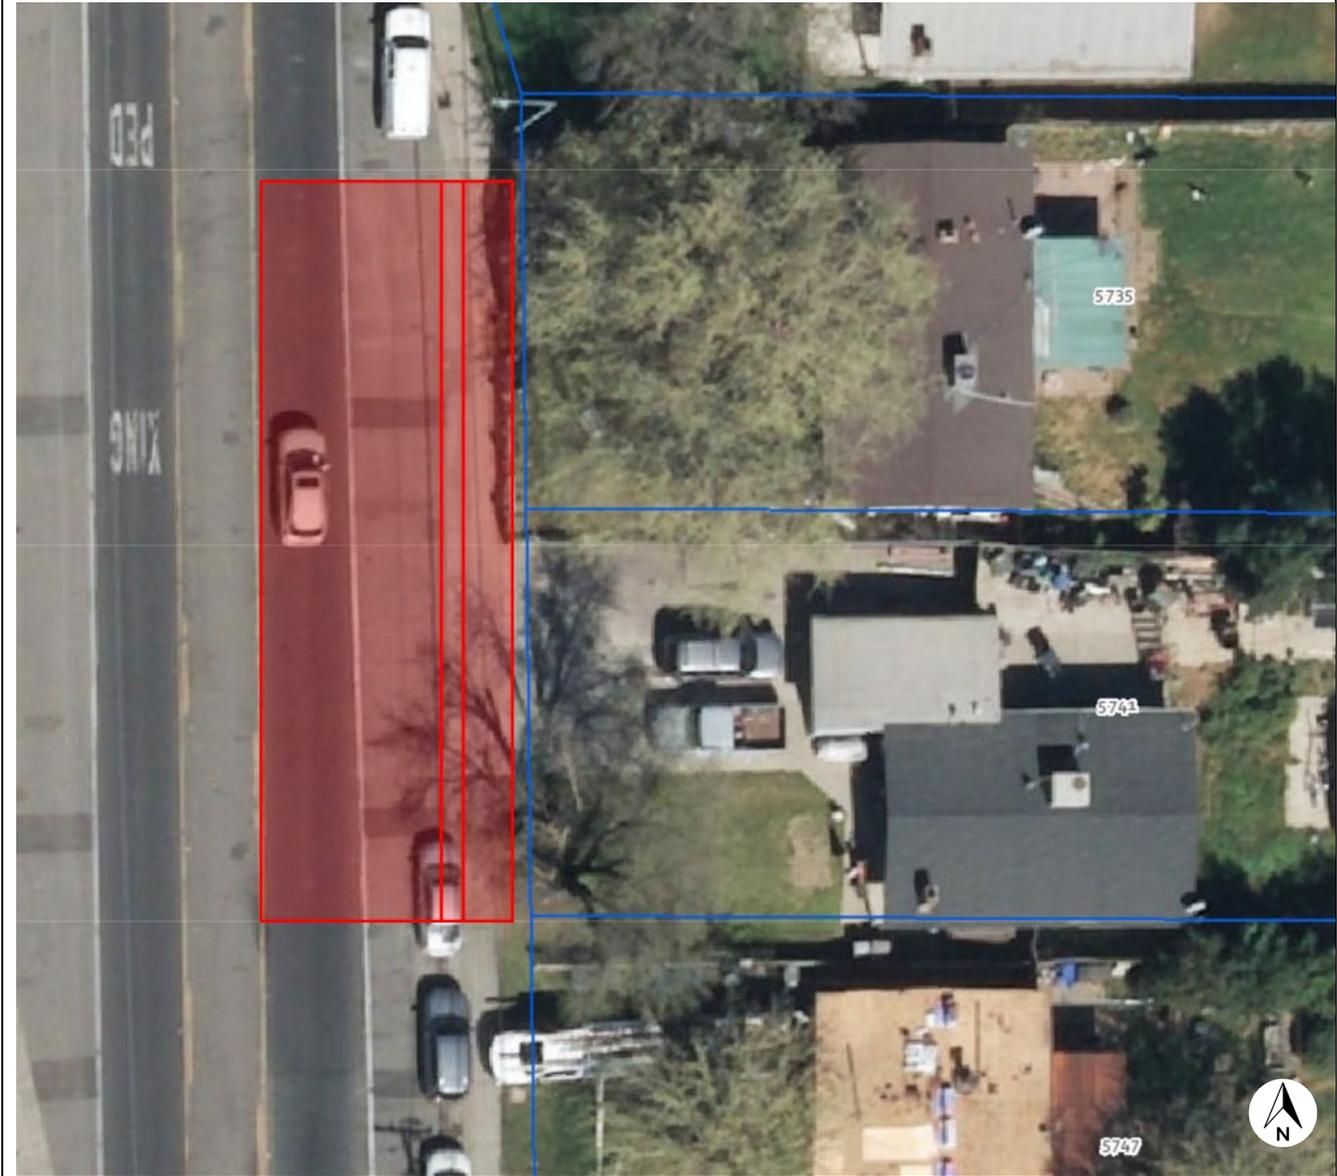


NB M L King Jr Blvd & 41st Ave (FS)	Priority: 8	Stop ID: 2605 21 on, 19 off
--	--------------------	--


Relocate bus stop to far side of intersection
Secure ROW at 3821 41st Ave (APN 037-0027-053)
Construct new 4' x 16' concrete pad behind sidewalk
Install new 8' transit shelter and bench

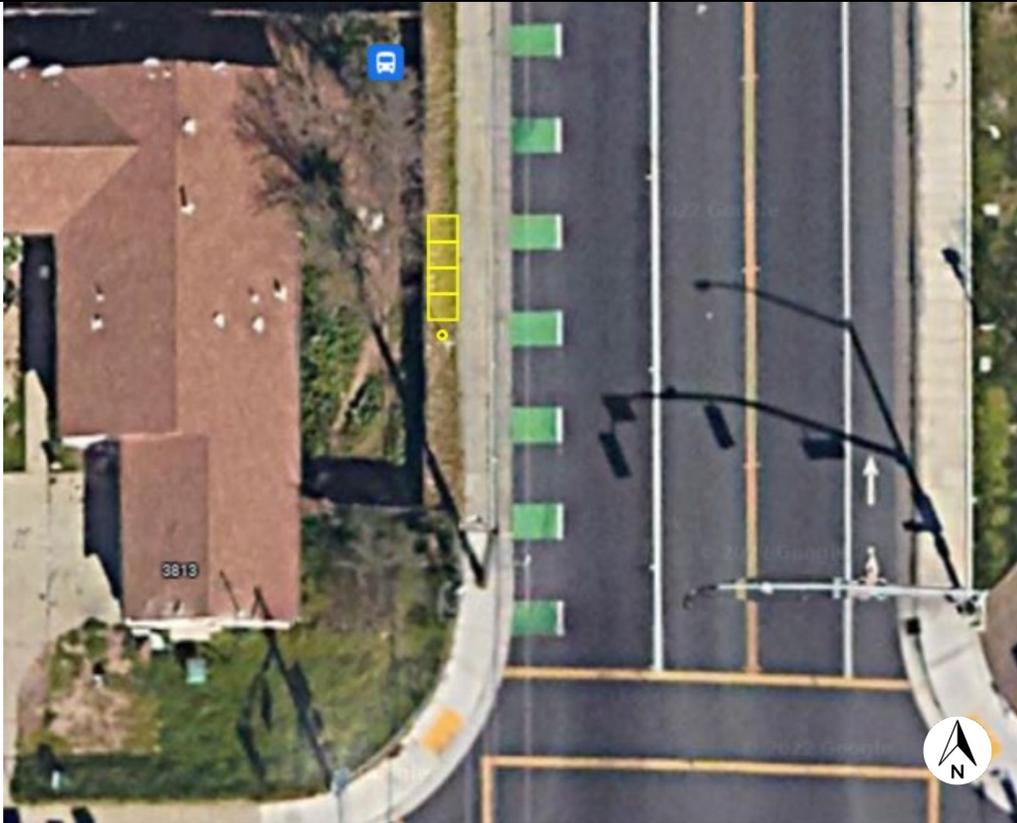

SB M L King Jr Blvd & 41st Ave (NS)	Priority: 5	Stop ID: 2589 12 on, 25 off
Secure ROW at 3811 41 st Ave (APN 037-0011-072) Construct new 4' x 16' concrete pad behind sidewalk Install new pole and sign		
		

NB M L King Jr Blvd & 44th Ave (NS)	Priority: 8	Stop ID: 2604 35 on, 14 off
Relocate stop to near-side to 43 rd Ave – appx 200 feet Secure ROW at 6301 MLK Jr Blvd (APN 037-0181-009) Construct new 4' x 16' concrete pad behind sidewalk Install new pole and sign Install new 12' transit shelter and bench		

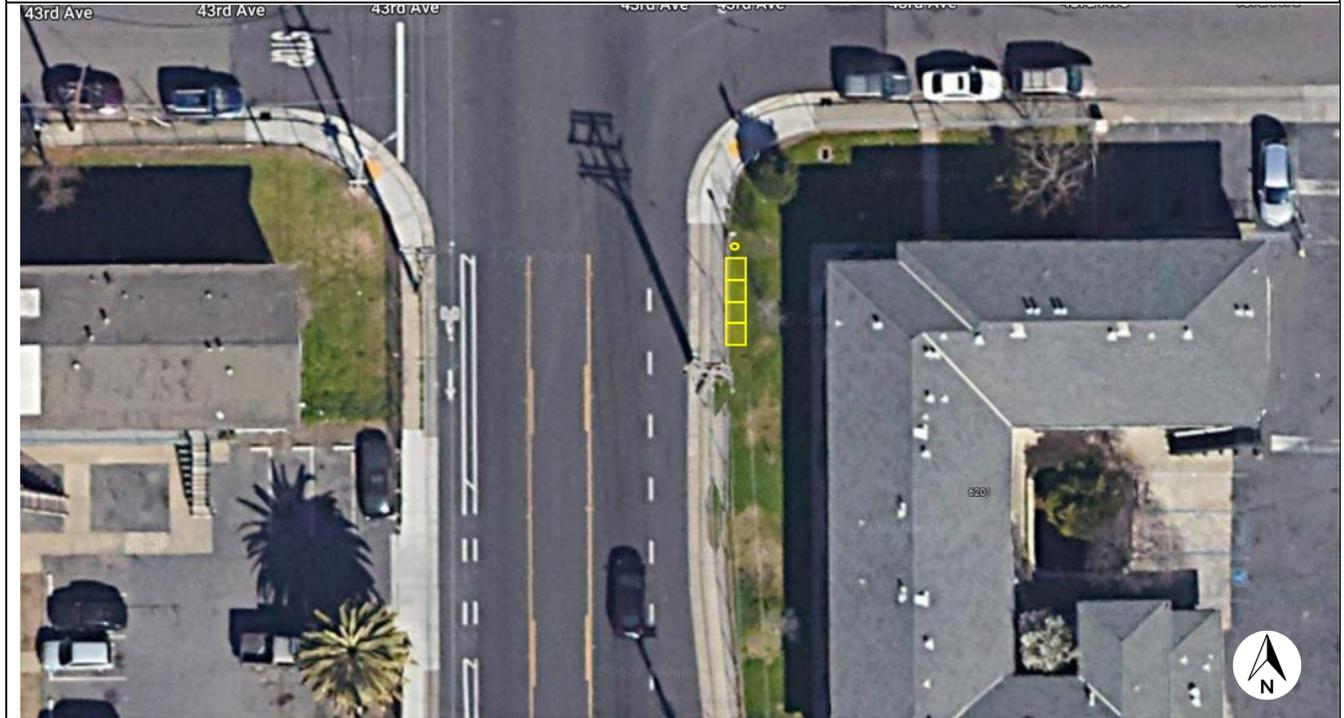

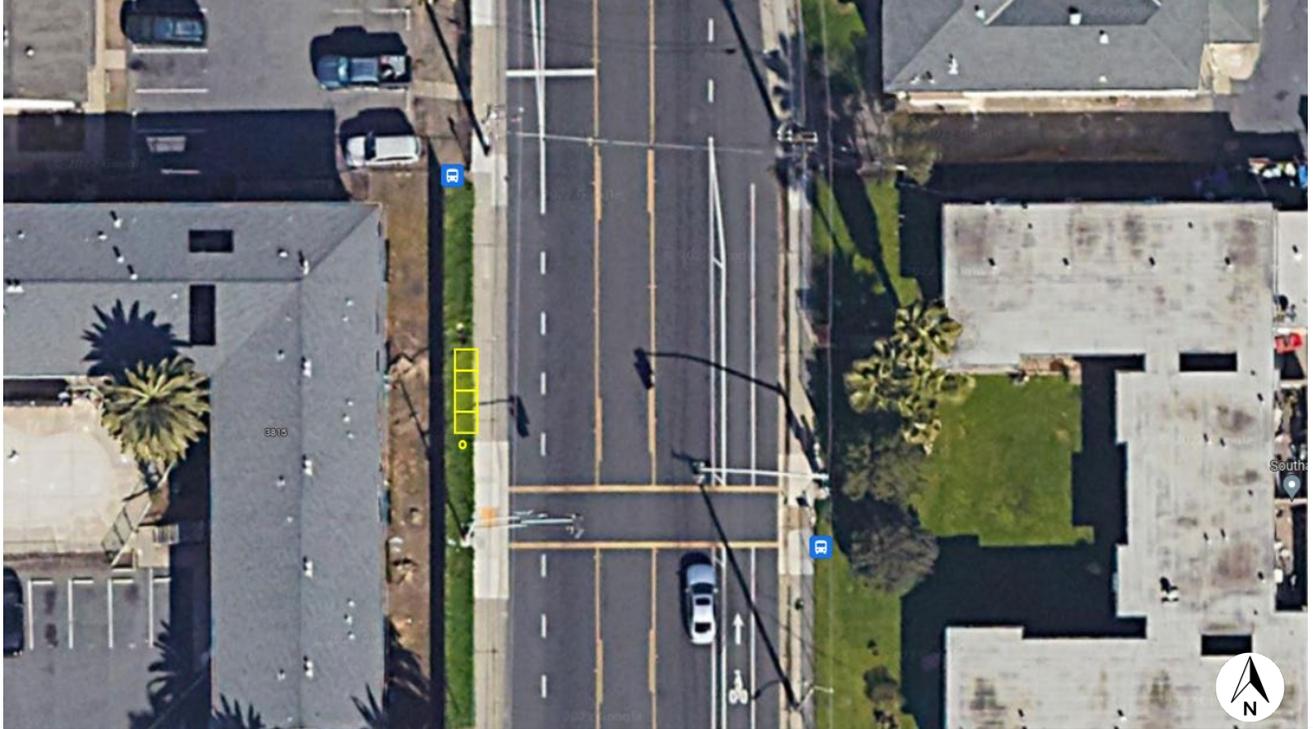
SB M L King Jr Blvd & 44th Ave (NS)	Priority: 5	Stop ID: 2590 11 on, 28 off
Secure ROW at 3815 44 th Ave (APN 037-0173-018) Construct new 4' x 16' concrete pad behind sidewalk Install new bench Install new pole and sign		
		

SB M L King Jr Blvd & 47th Ave (NS)	Priority: 4	Stop ID: 2591 17 on, 18 off
Secure ROW at 3735 47 th Ave (APN 037-0243-029) Construct 4 x 16' concrete pad behind sidewalk Replace 9'x34' driveway curb cut with sidewalk and vertical curb Install new pole and sign Install new bench		



NB M L King Jr Blvd & 47th Ave (FS)	Priority: 6	Stop ID: 2603 30 on, 22 off
--	--------------------	--

Relocate existing sign and pole.
Construct new 4' x 16' concrete pad behind sidewalk
Rebuild fencing
Install new 8' transit shelter and bench

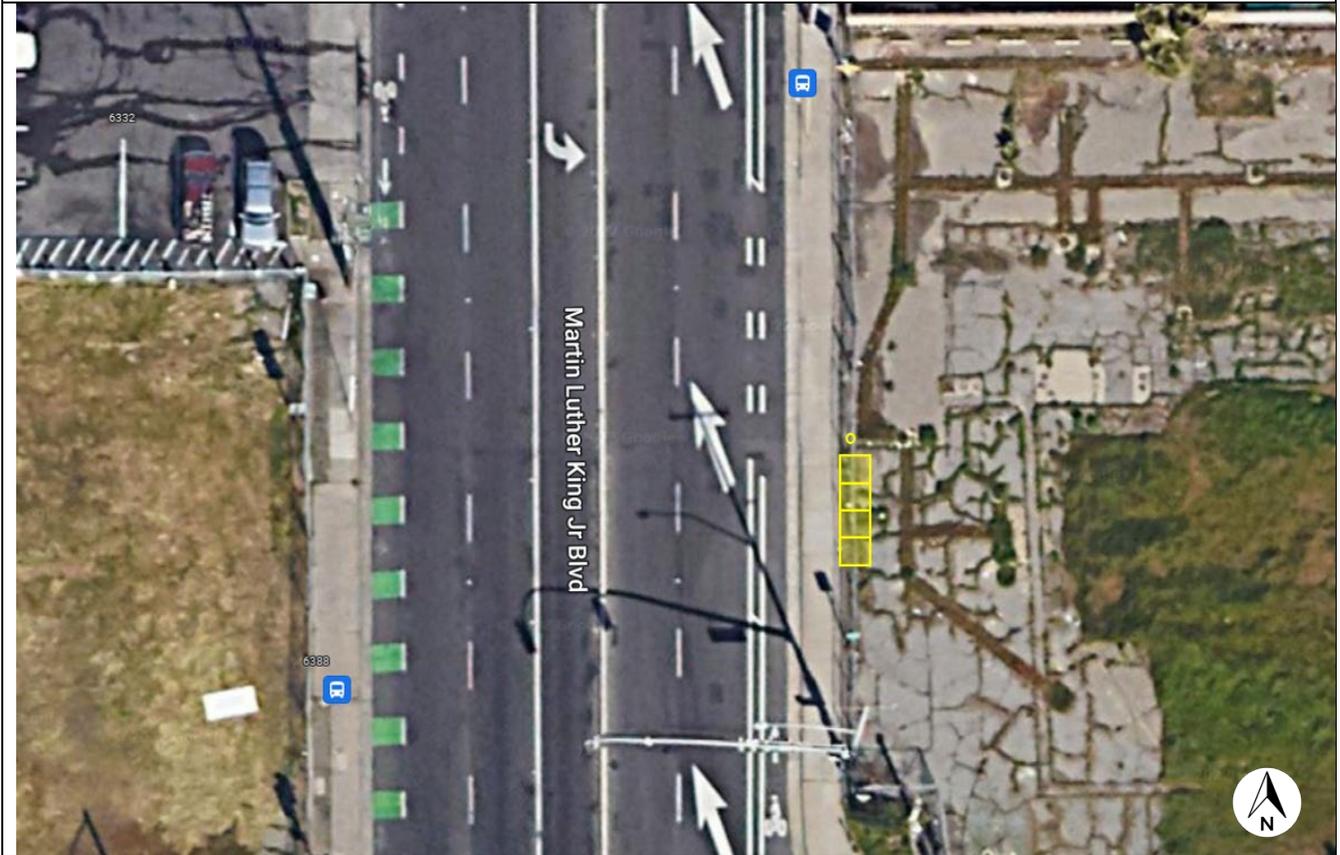


Corridor #43

Fruitridge Rd

Mendocino Blvd to Lawrence Dr

Jurisdiction:

Sacramento County

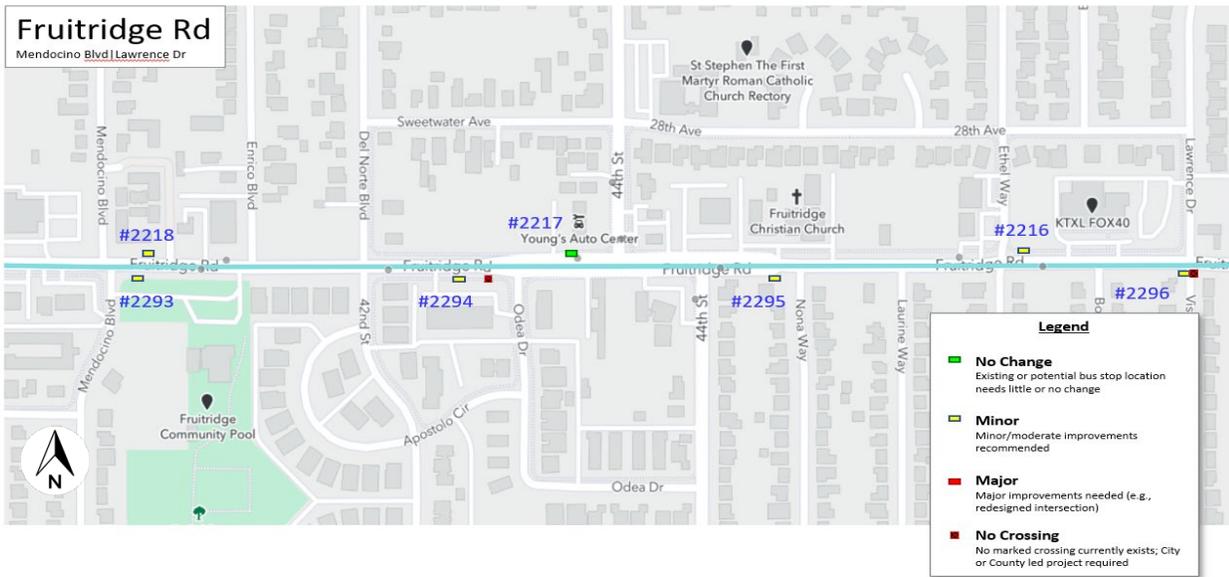

Corridor Length:

0.5 miles

Number of Stops:

- 1 – No Changes Needed
- 6 – Minor/Moderate Changes Recommended
- 0 – Major Changes Needed – Not Currently Feasible
- 2 – crossings needed

Total Cost:

\$98,000	Design, project approvals
\$76,000	Construction
\$174,000	Total

Notes:

Corridor Priority: 4.0


WB Fruitridge Rd & Enrico Blvd (FS)	Priority: 4	Stop ID: 2218 10 on, 11 off
--	--------------------	--

Secure ROW at 3999 Fruitridge Rd (APN 022-0232-030)
Construct new 4 x 16' concrete pad





EB Fruitridge Rd & Mendocino Blvd (NS)	Priority: 5	Stop ID: 2293 12 on, 8 off
---	--------------------	---


Secure ROW at 4000 Fruitridge Rd (APN 026-0041-027)
Construct new 4 x 16' concrete pad
Reinstall bench on pad

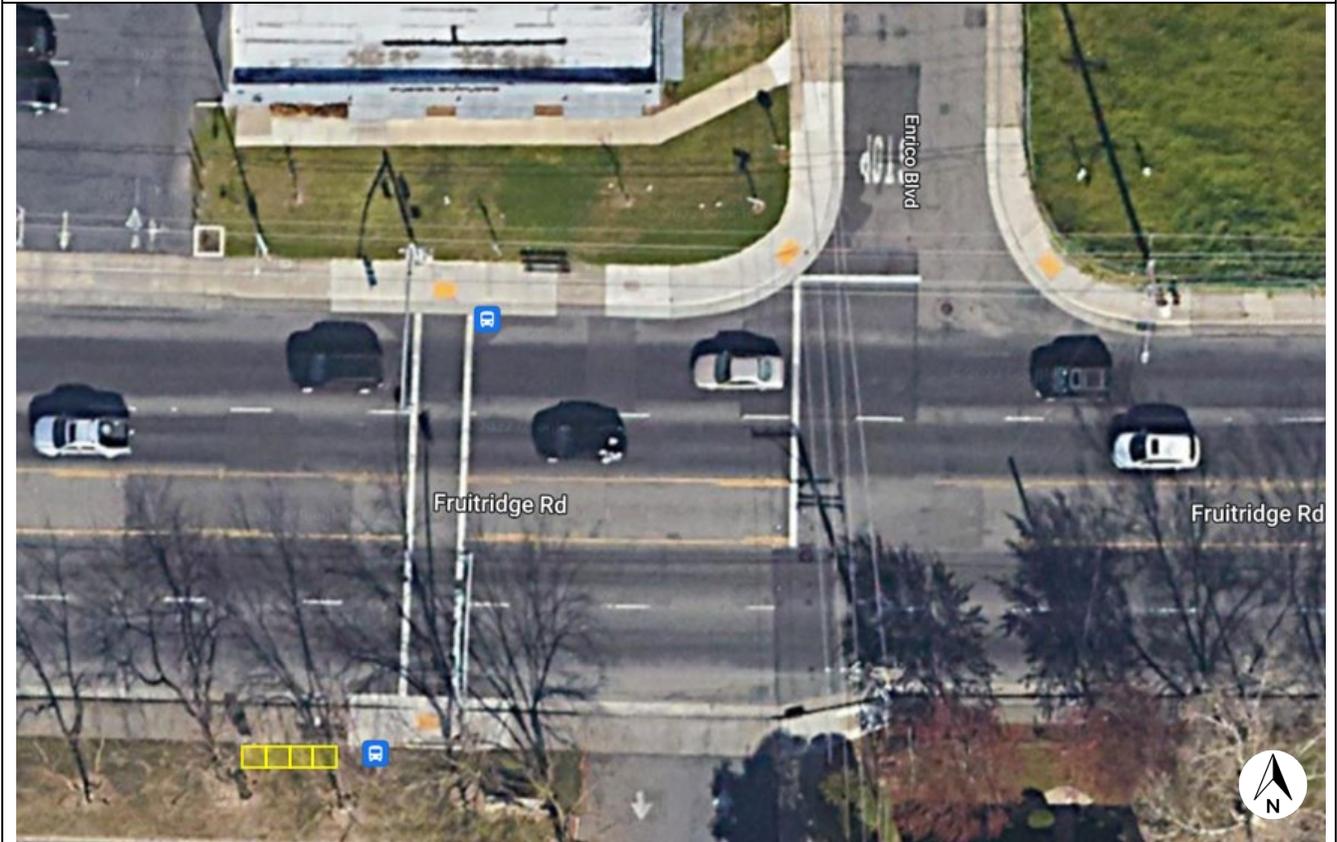


EB Fruitridge Rd & 42nd St	Priority: 6	Stop ID: 2294 7 on, 6 off
Relocate stop approx. 250 feet east Secure ROW at 4250 Fruitridge Rd (APN 026-0281-002) Construct new 4' x 32' concrete pad Install new pole and sign Relocate existing bench Consider new crossing or relocating bus stop (out of scope)		

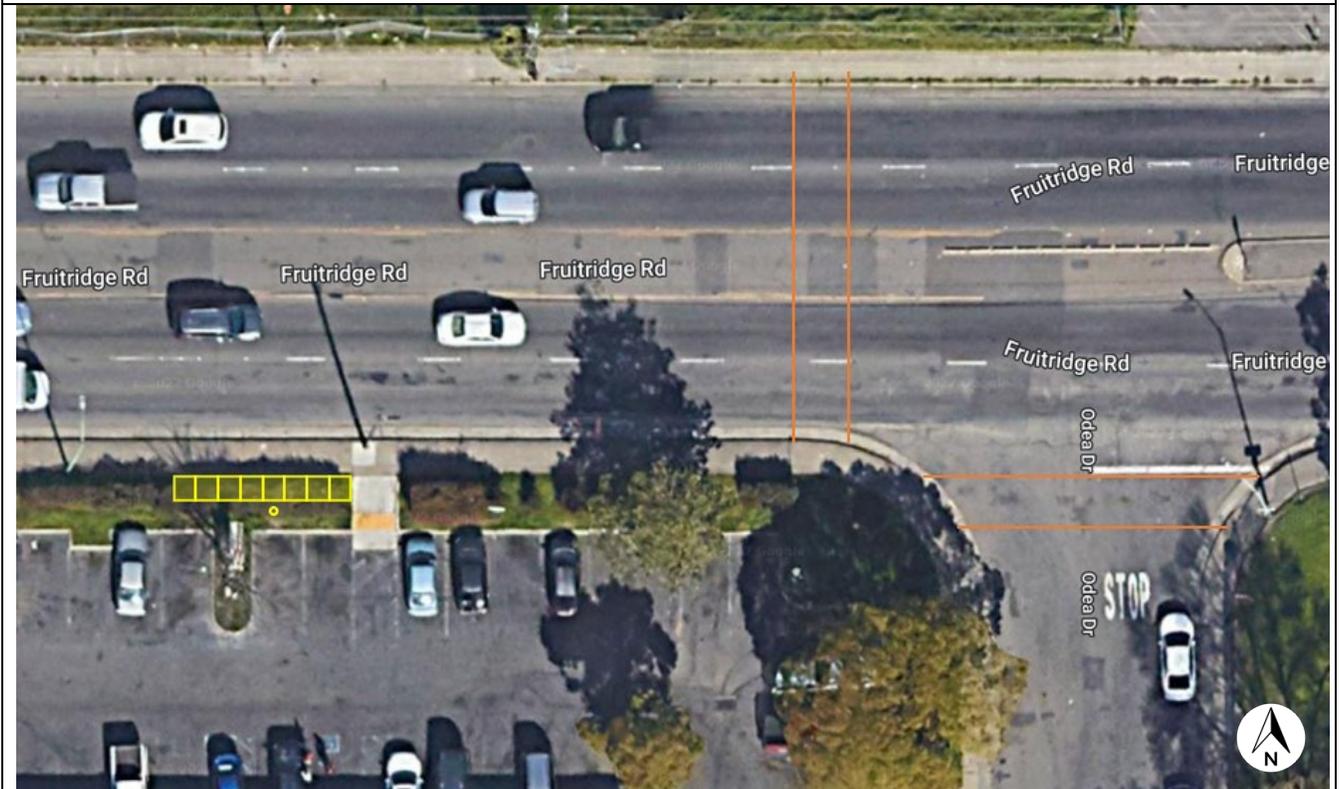

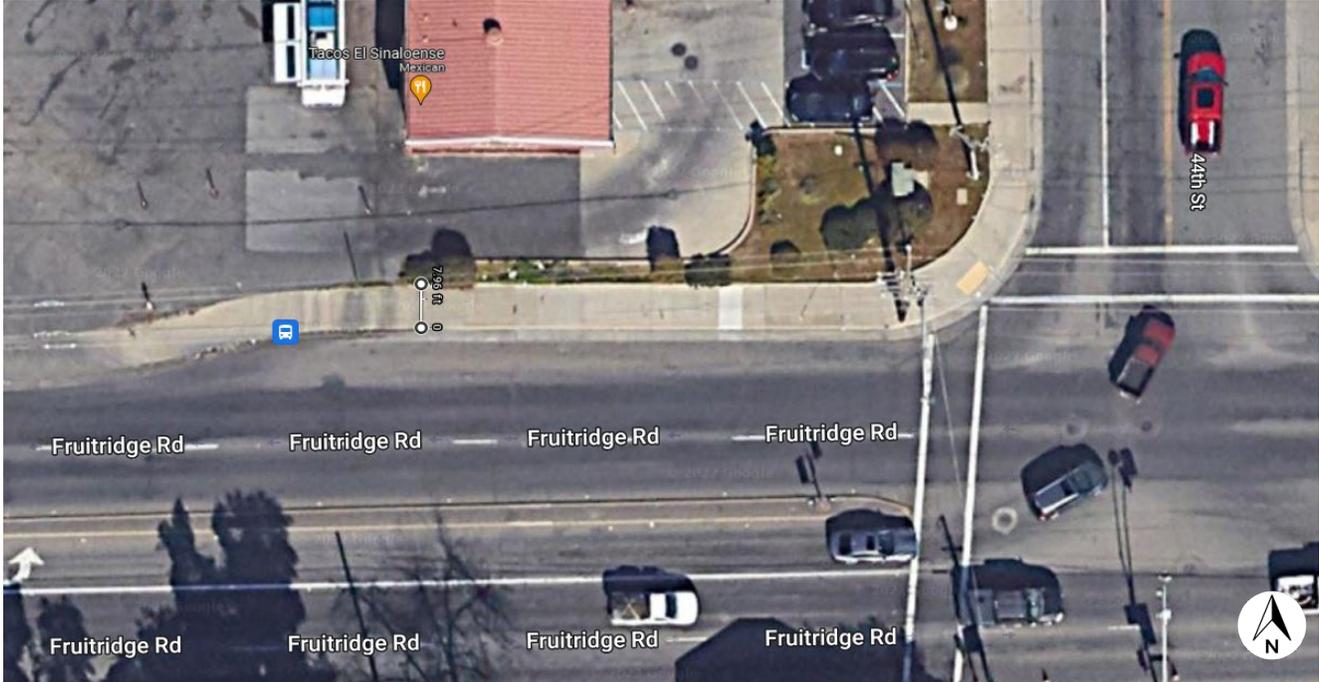
WB Fruitridge Rd & 44th St (FS)	Priority: 3	Stop ID: 2217 19 on, 17 off
Install new bench Install pedestrian scale lighting		
		

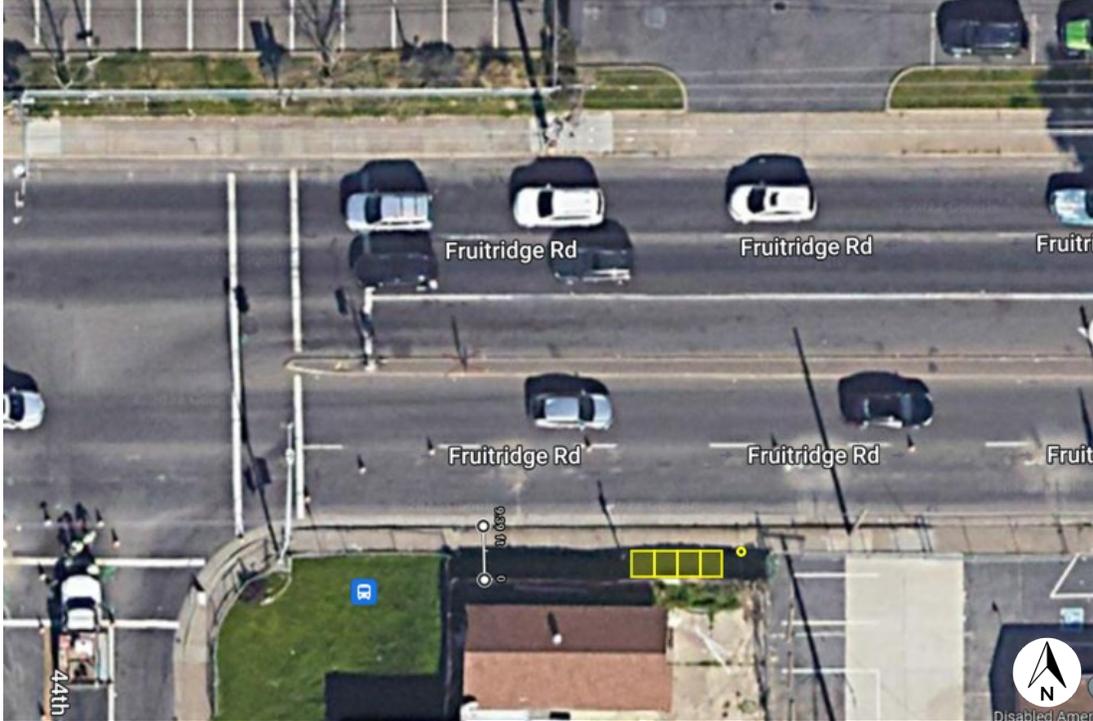EB Fruitridge Rd & 44th St (FS)	Priority: 4	Stop ID: 2295 8 on, 22 off
Secure ROW at 5601 44 th St (APN 026-0051-024) Construct new 4' x 16' concrete pad Install new pole and sign		
		

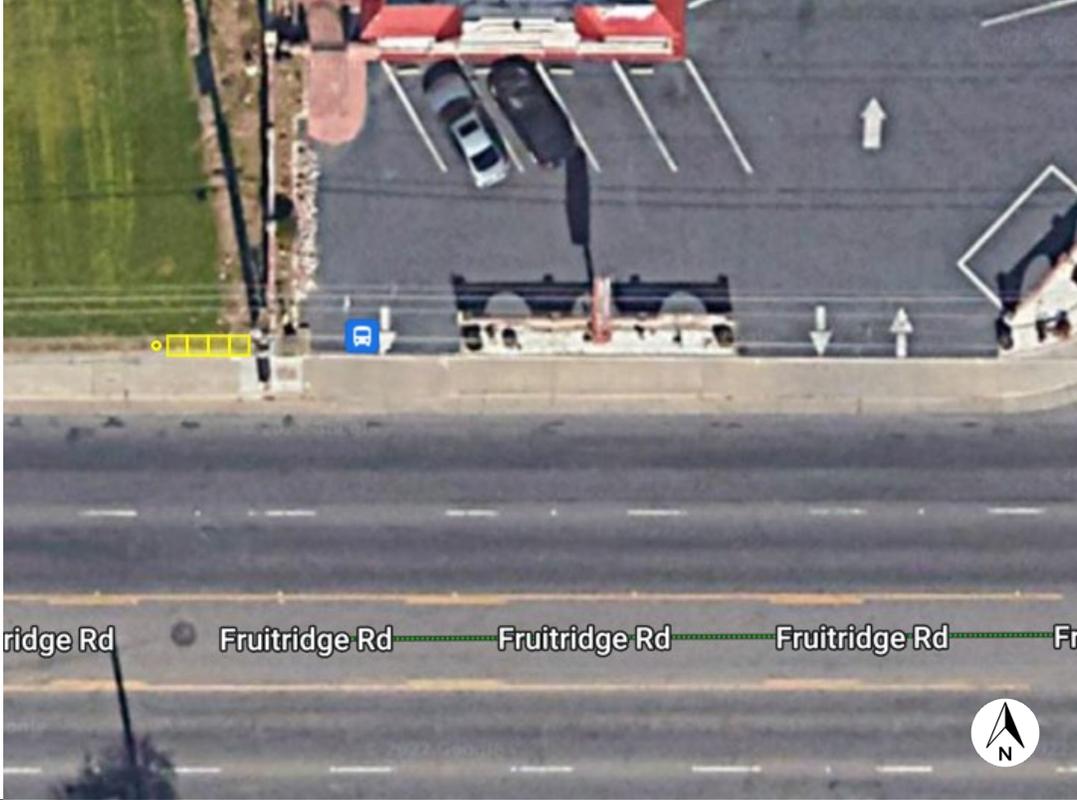WB Fruitridge Rd & Ethel Way (FS)	Priority: 3	Stop ID: 2216 2 on, 2 off
Secure ROW at 4541 Fruitridge Rd (APN 022-0252-018) Construct new 4' x 16' concrete pad Install new pole and sign		
 <p>The image is an aerial photograph of a road intersection. A yellow rectangle on the left side of the road indicates the proposed bus stop location. A blue sign with a white 'B' and a downward arrow is positioned near the stop. The road has multiple lanes with white dashed lines and arrows. A north arrow is located in the bottom right corner of the image. The text 'Fruitridge Rd' is overlaid on the road image in several places.</p>		



EB Fruitridge Rd & Bonnie Mae Way (NS)	Priority: 3	Stop ID: 2296 3 on, 4 off
---	--------------------	--

Secure ROW at 5600 Bonniemae Way (APN 026-0054-001)
Construct new 4' x 16' concrete pad
Install new pole and sign
Consider new crossing or relocating bus stop (out of scope)

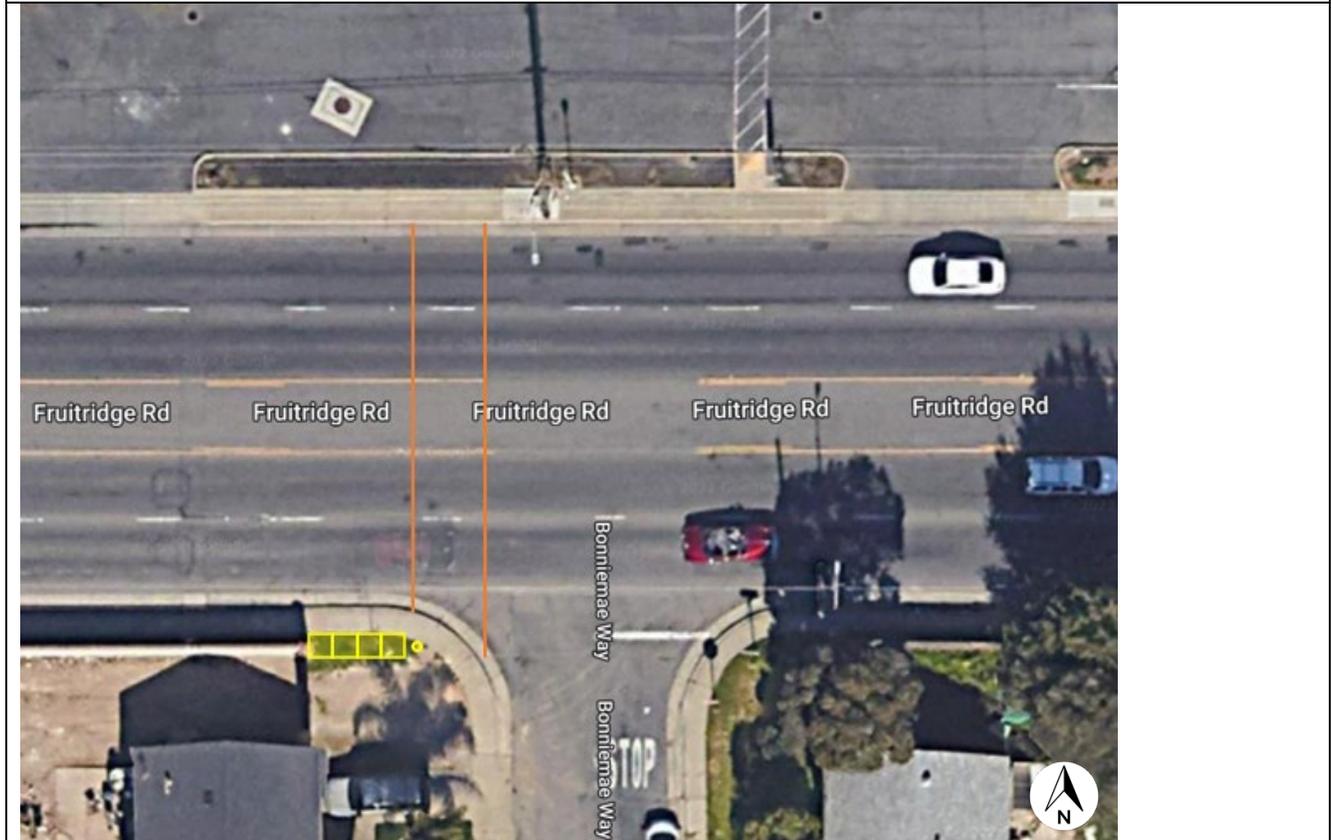

Corridor #44
14th Ave and 44th St
 MLK Blvd to Fruitridge Rd

Jurisdiction:
 Sacramento County

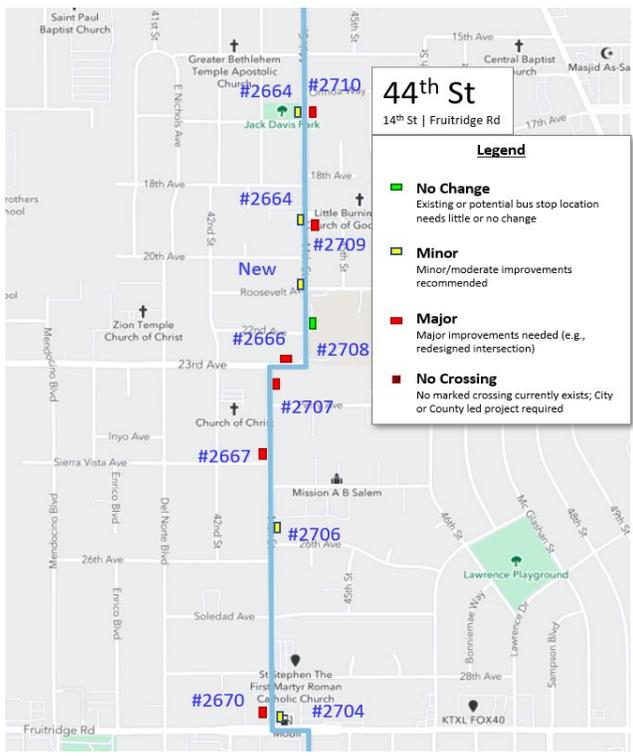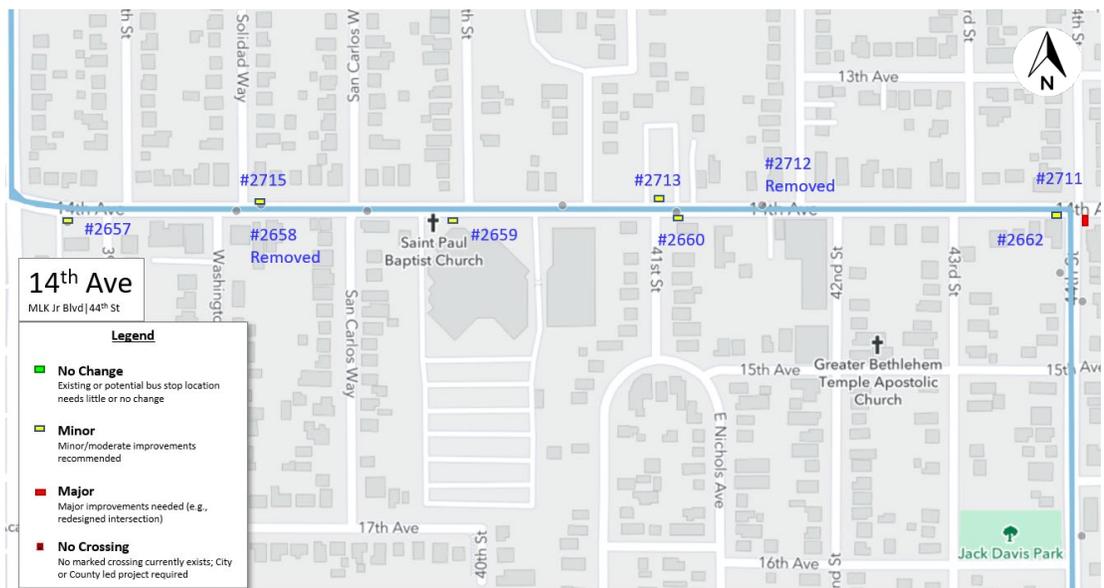



Corridor Length:
2.5 miles

Number of Stops:
 3 – No Changes Needed
 20 – Minor/Moderate Changes Recommended
 12 – Major Changes Needed – Not Currently Feasible
 0 – crossings needed

Total Cost:

\$1,103,500	Design, project approvals
\$2,018,000	Construction
\$3,121,500	Total

Corridor Priority: 3.6


EB 14th Ave & 39th St (NS)	Priority: 1	Stop ID: 2657 4 on, 14 off
---------------------------------------	--------------------	---

Secure ROW at 3902 39th St (APN 020-0071-034)
Construct new 4 x 16' concrete pad behind sidewalk
Install pedestrian scale lighting




WB 14th Ave & La Solidar Way (NS)	Priority: 1	Stop ID: 2715 8 on, 8 off
--	--------------------	--

Secure ROW at 3831 La Solidar Way (APN 014-0263-017)
Construct new 4 x 16' concrete pad behind sidewalk
Replace 3 x 70' rolled curb/gutter w/ new vertical curb/gutter
Repave 17 x 70' area adjacent to new curb/gutter
Rebuild 6 x 70' level sidewalk
Relocate existing pole and sign
Rebuild fencing

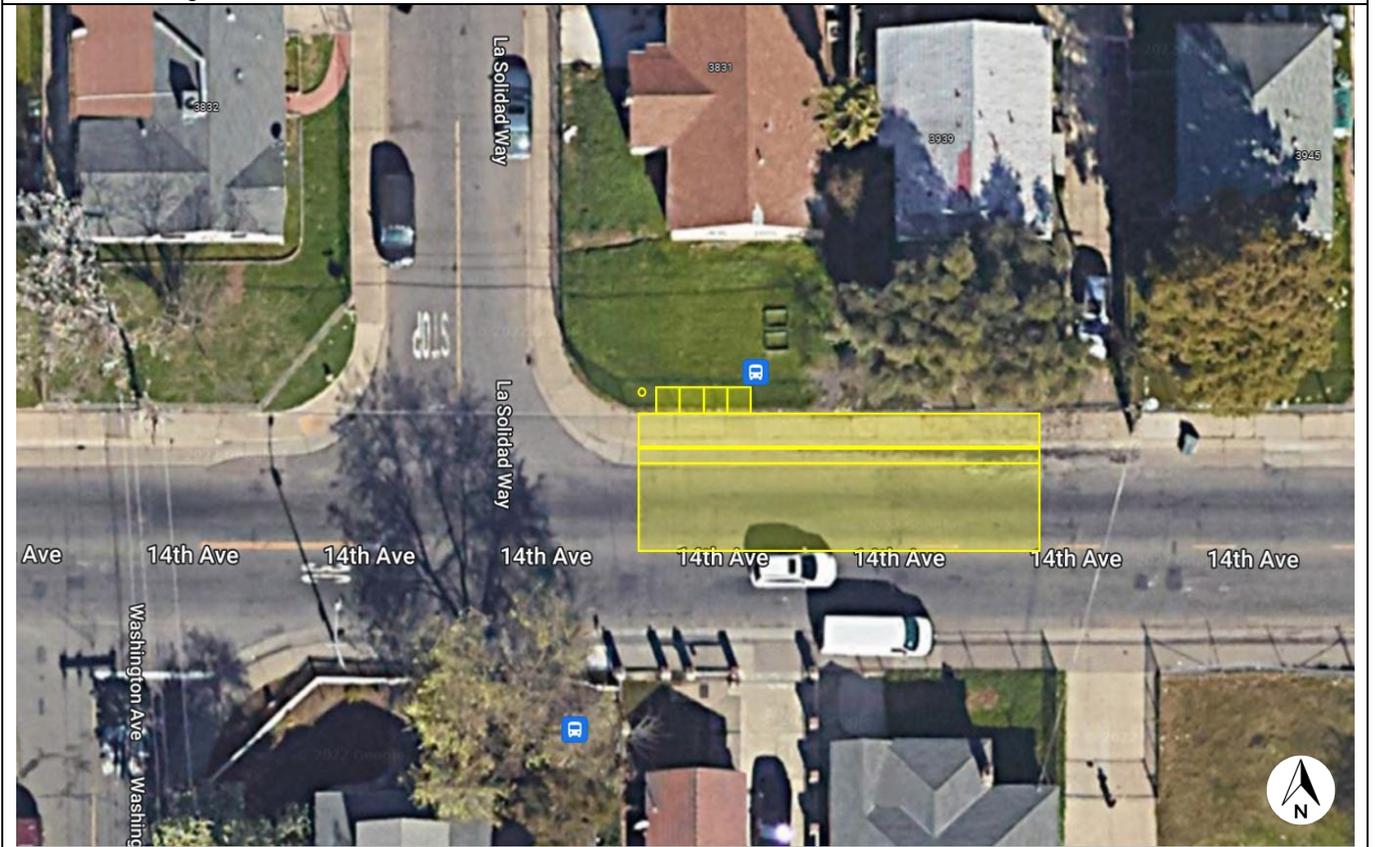


EB 14th Ave & Washington Ave (FS)	Priority: NA	Stop ID: 2658 3 on, 2 off
Remove stop		
		

EB 14th Ave & 40th St (NS)	Priority: 4	Stop ID: 2659 7 on, 8 off
Relocate stop to nearside of 40 th st, approx. 150' to the east Secure ROW at 3996 14 th Ave (APN 020-0074-019) Construct new 4 x 16' concrete pad behind sidewalk Replace 3 x 100' rolled curb/gutter w/ new vertical curb/gutter Repace 17 x 100' area adjacent to new curb/gutter Rebuild 5 x 100' level sidewalk Install new pole and sign Install new bench		

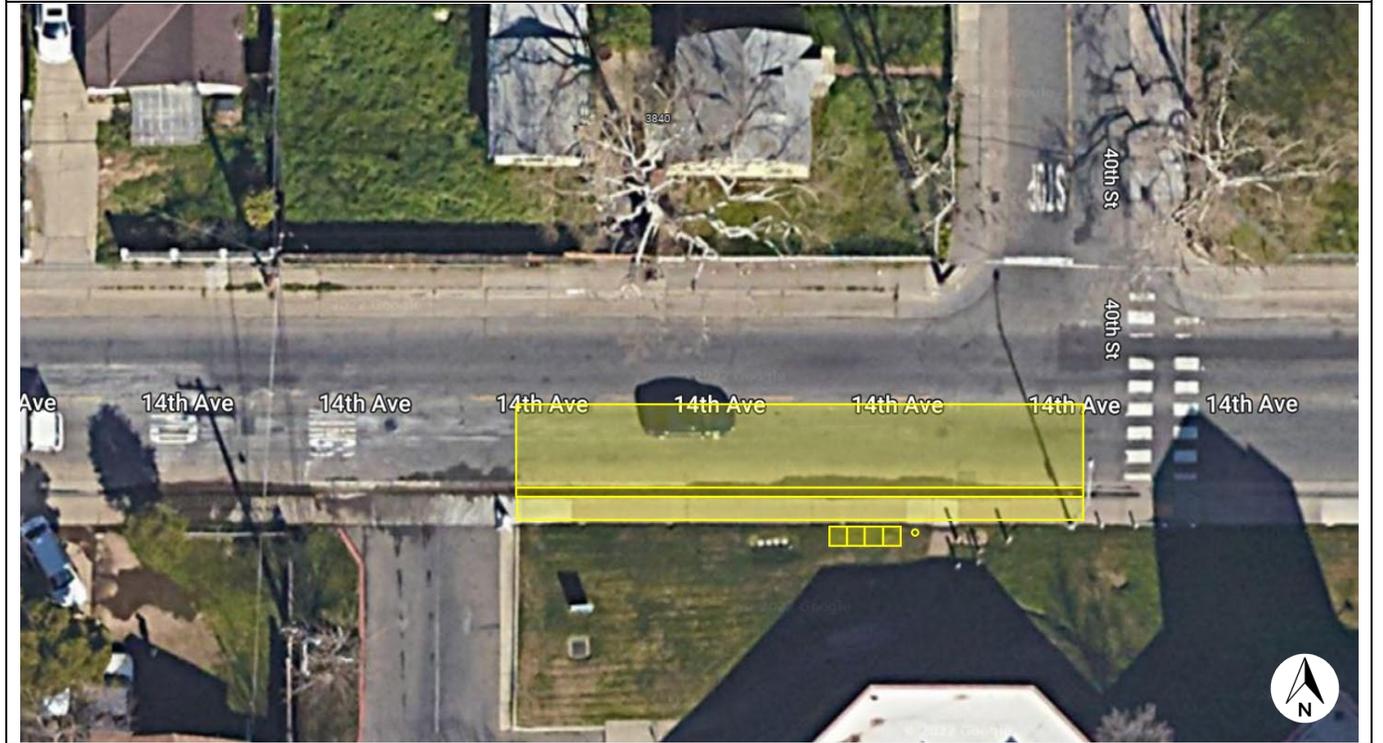

EB 14th Ave & 41st St (FS)	Priority: 4	Stop ID: 2660 7 on, 12 off
Relocate stop approx. 100 feet east Secure ROW at 4140 14 th Ave (APN 020-0083-001) Construct new 4 x 16' concrete pad behind sidewalk Replace 3 x 60' rolled curb/gutter w/ new vertical curb/gutter Repave 17 x 60' area adjacent to new curb/gutter Rebuild 4 x 60' level sidewalk Remove existing pole Relocate existing sign to existing light pole		

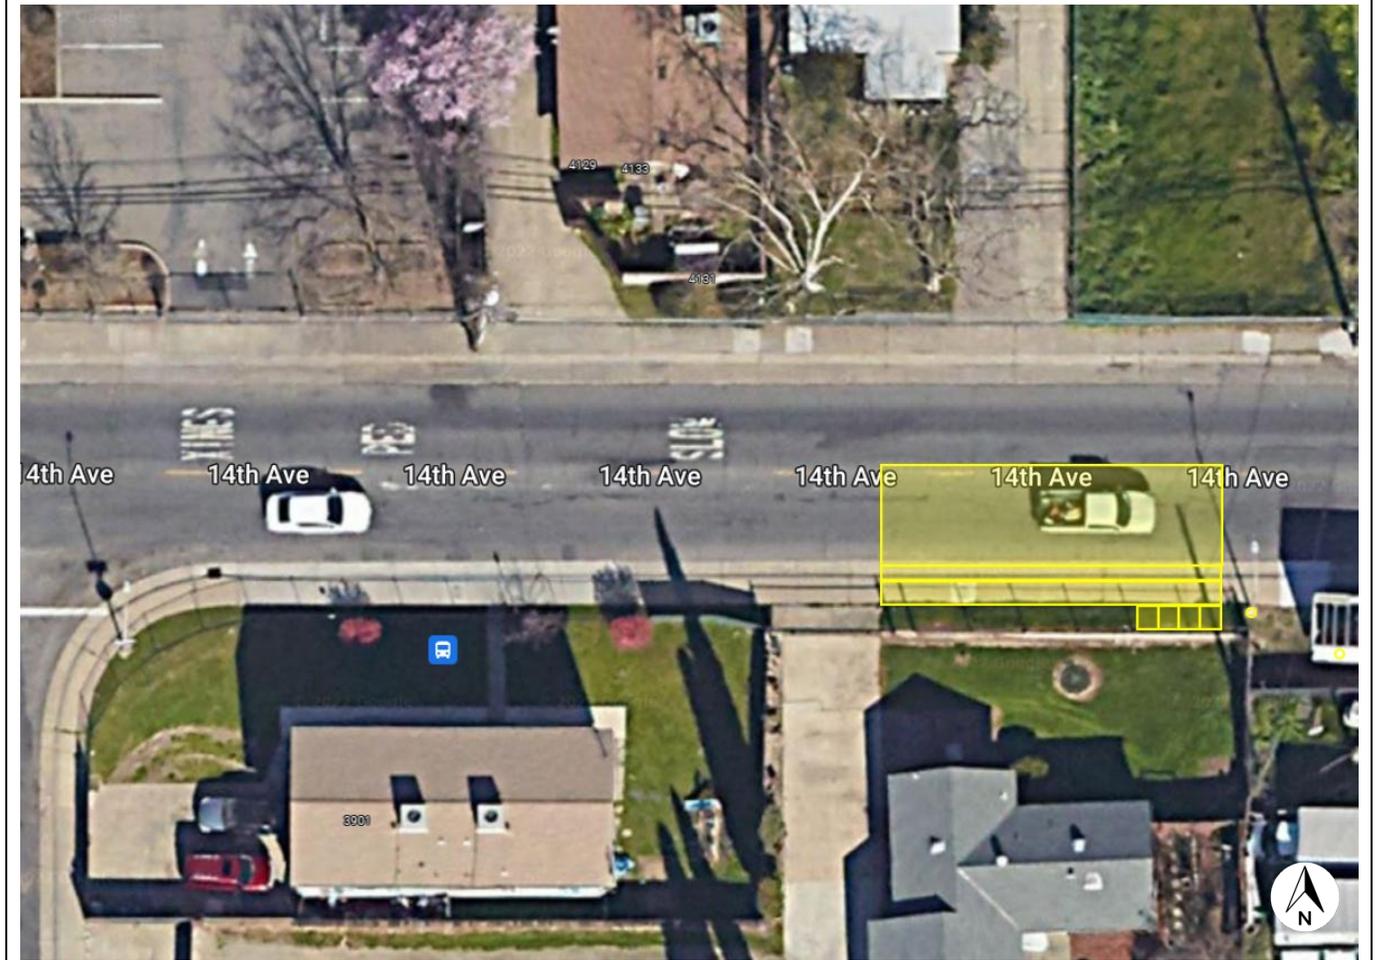


WB 14th Ave & 42nd St (FS)	Priority: 3	Stop ID: 2712 6 on, 3 off
Relocate stop approx. 250' east Secure ROW at 4145 14 th Ave (APN 014-0272-039) Construct new 4 x 16' concrete pad behind sidewalk Replace 3 x 44' rolled curb/gutter w/ new vertical curb/gutter Repace 14 x 44' area adjacent to new curb/gutter Rebuild 6 x 44' level sidewalk Install new sign and pole		




SB 44th St & 14th Ave (NS)	Priority: 3	Stop ID: 2662 6 on, 11 off
---------------------------------------	--------------------	---

Relocate stop approx. 160 north to 14th Ave
Secure ROW at 4330 14th Ave (APN 020-0087-005)
Construct new 4 x 16' concrete pad behind sidewalk
Replace 3 x 40' rolled curb/gutter w/ new vertical curb/gutter
Repave 17 x 40' area adjacent to new curb/gutter
Rebuild 5 x 40' level sidewalk
Install no parking sign, route sign, and pole

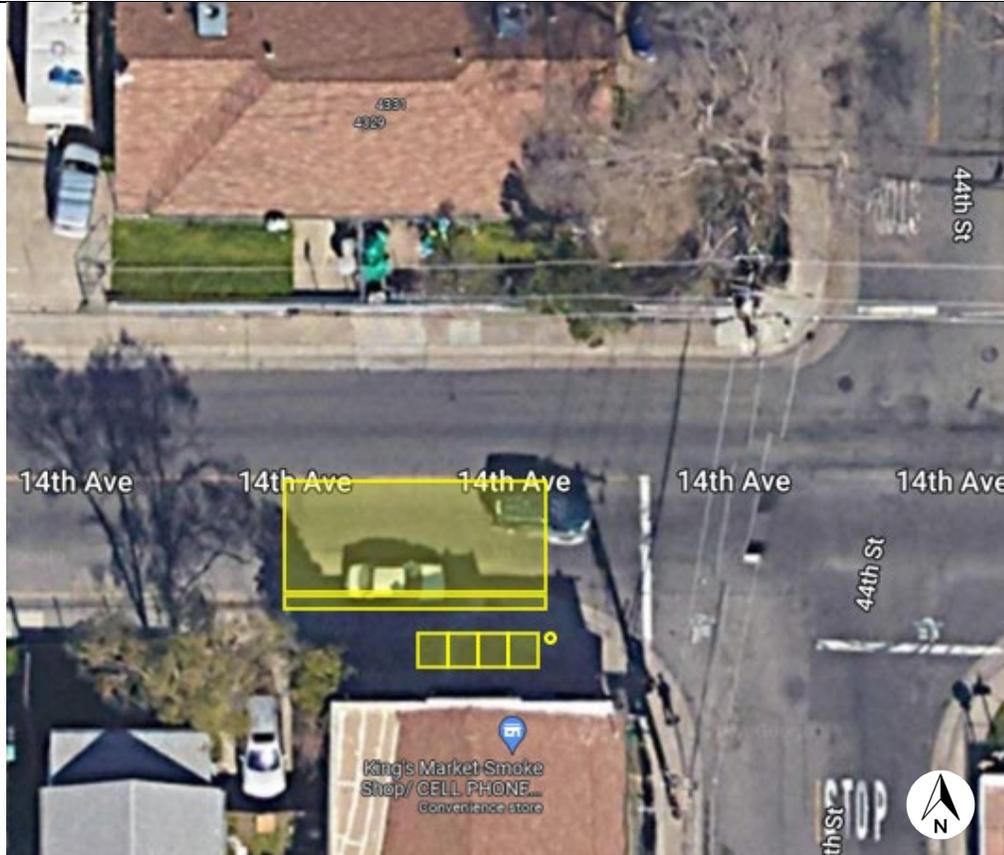


NB 44th St & 14th Ave (NS)	Priority: NA	Stop ID: 12345 5 on, 2 off
---------------------------------------	---------------------	---

Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost

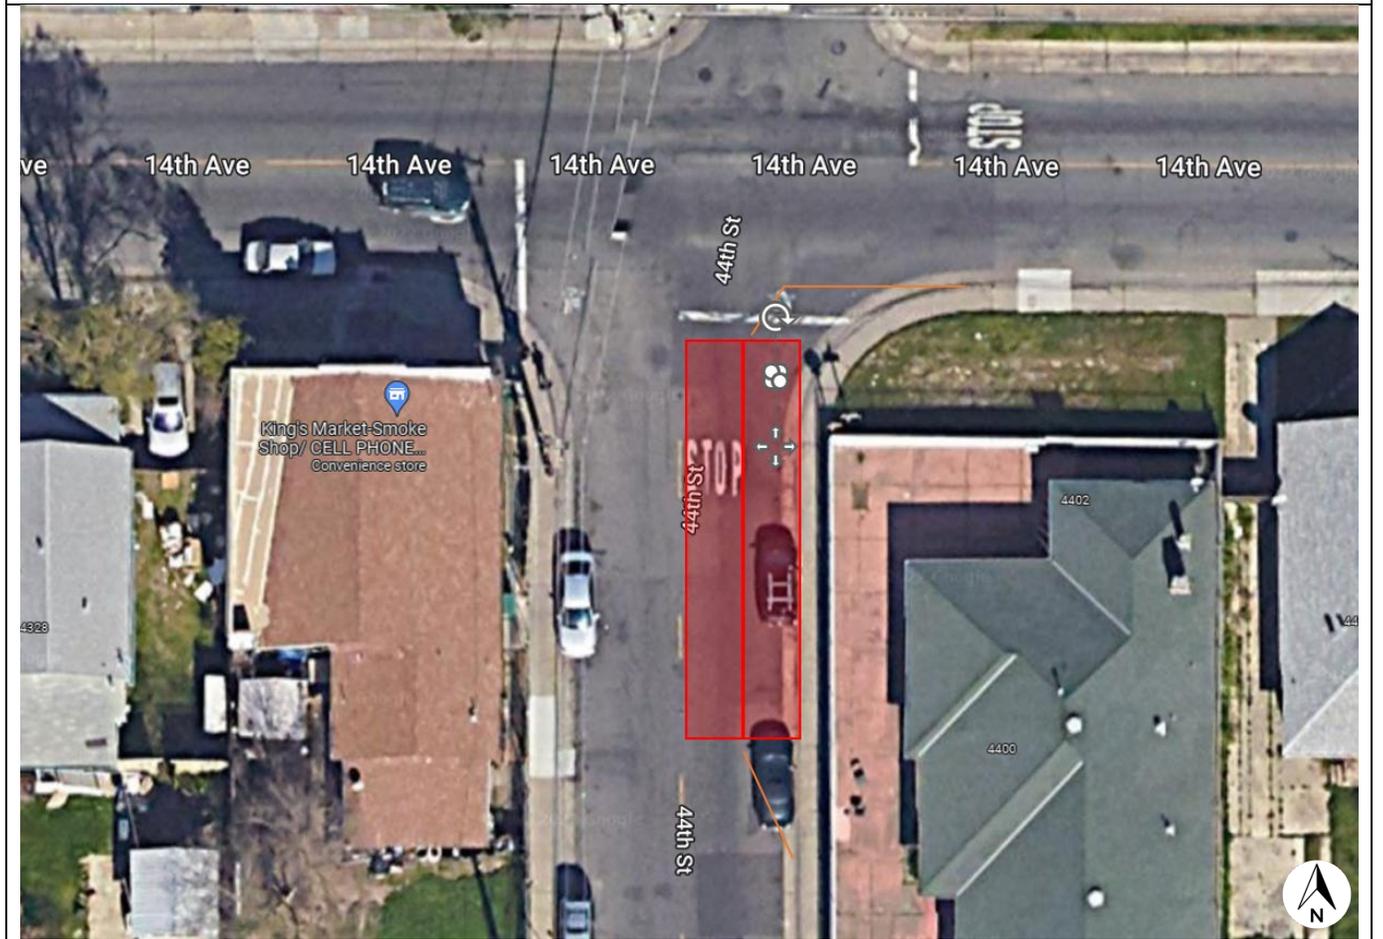


SB 44th St & 18th Ave (NS)	Priority: 5	Stop ID: 2664 8 on, 15 off
---------------------------------------	--------------------	---

Relocate stop approx. 350 feet north
Secure ROW at Jackson APN 020-0158-001
Construct new 4 x 16' concrete pad behind sidewalk and retaining walls as appropriate
Install bench
Install new sign and pole

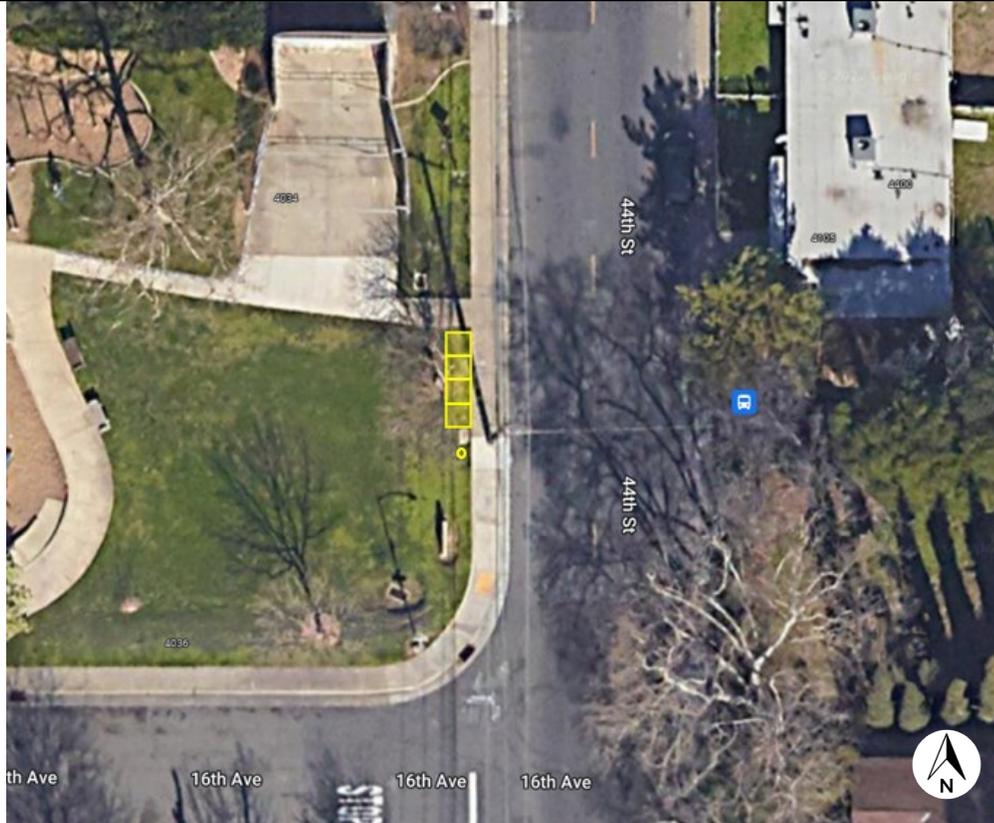


NB 44th St & Orinda Way (NS)	Priority: NA	Stop ID: 2710 5 on, 2 off
---	---------------------	--

Relocate stop approx. 50' north
Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
Consider new crossing or relocating bus stop (out of scope)

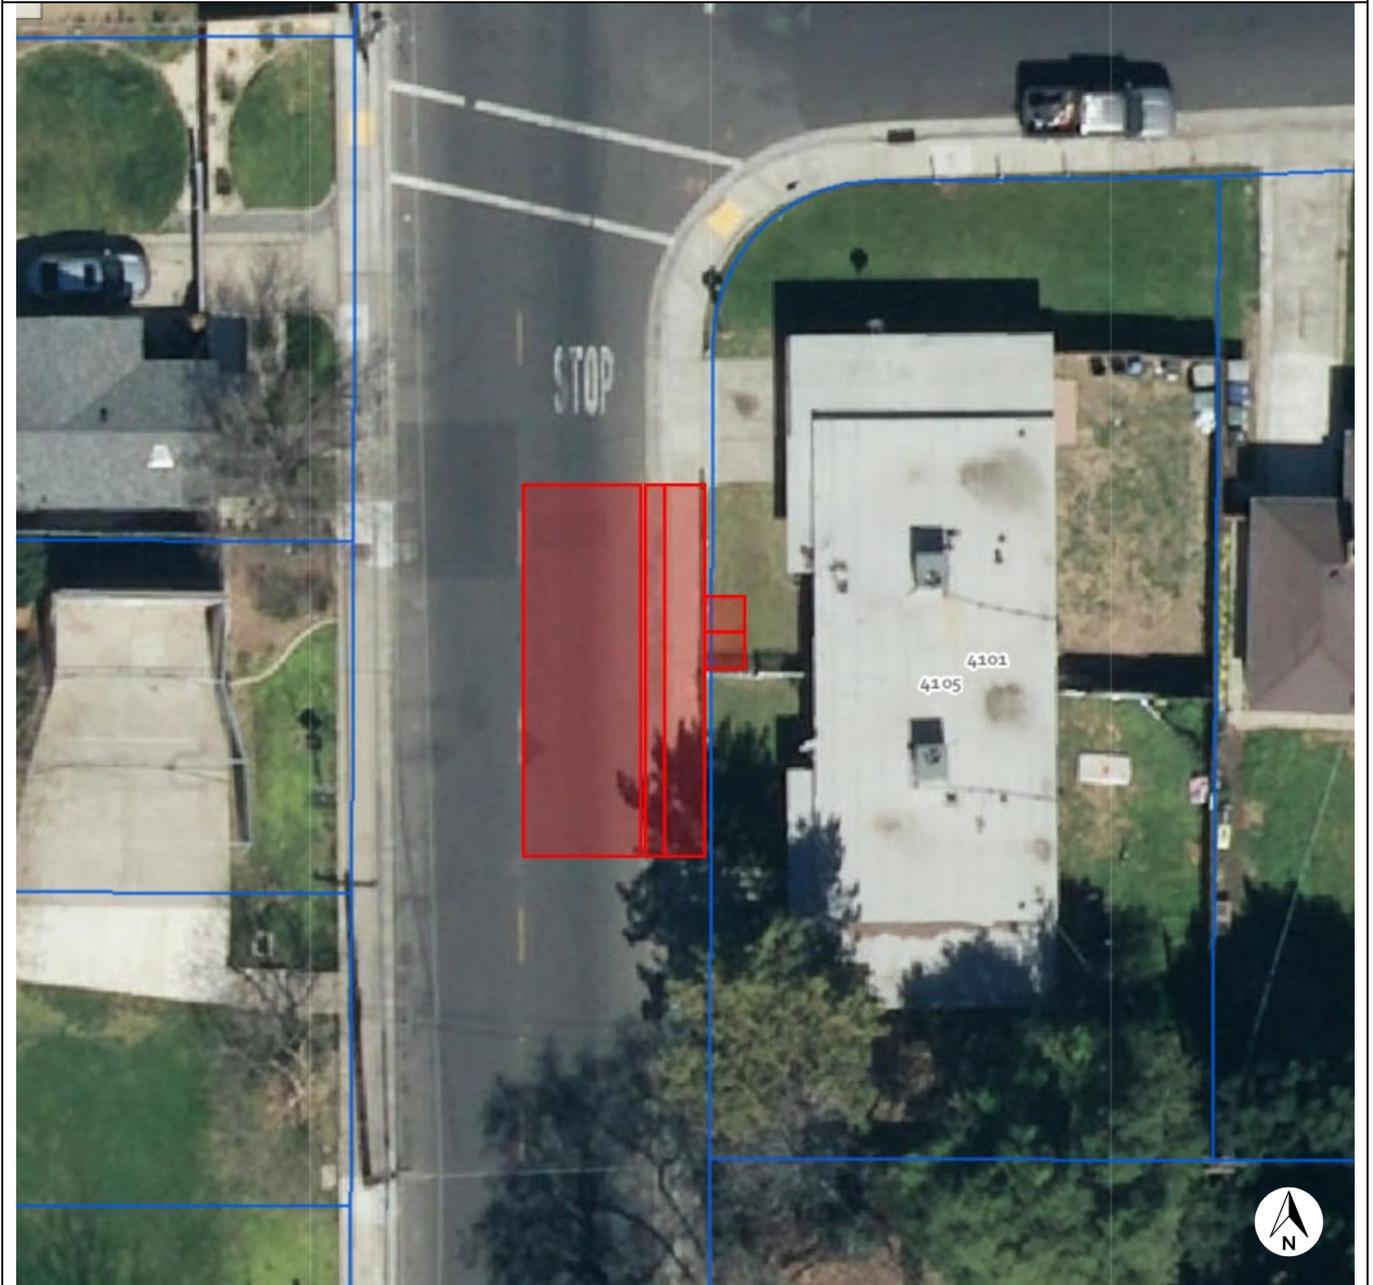

NB 44th St & 18th Ave (NS)	Priority: NA	Stop ID: 2709 14 on, 4 off
---------------------------------------	---------------------	---


Relocate stop approx. 400' south
Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
Consider new crossing or relocating bus stop (out of scope)

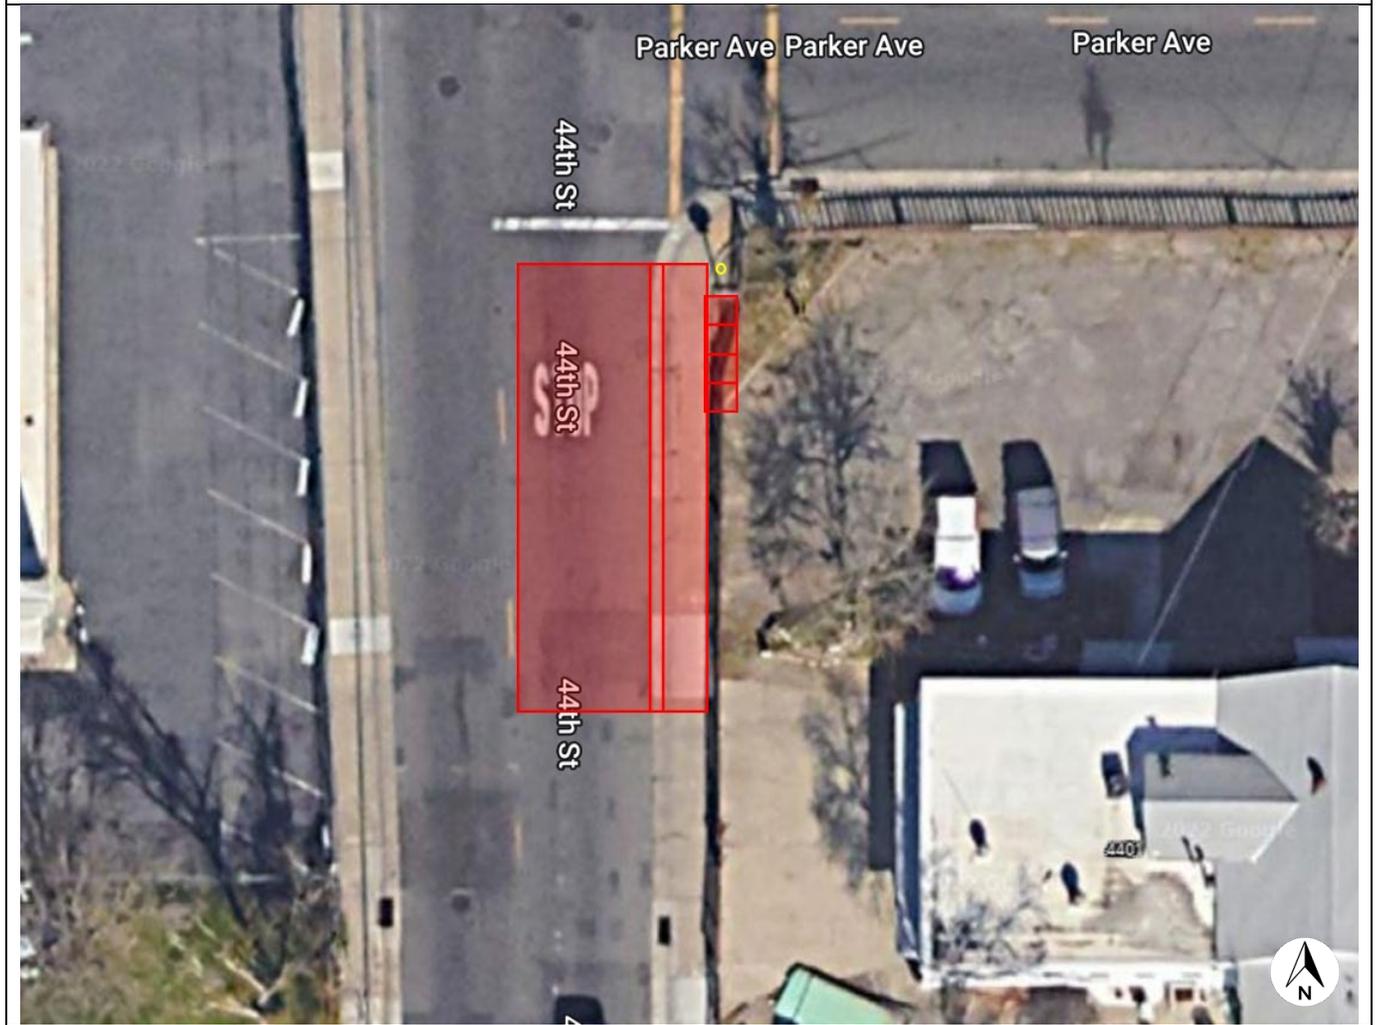

SB 44th St & 18th Ave (NS)	Priority: 4	Stop ID: 2664 8 on, 15 off
Relocate stop 200' south to near side of Parker Ave Secure ROW at 4500 44 th St (APN 020-0236-016) Construct new 4 x 16' concrete pad behind sidewalk with concrete curb Replace 3 x 40' rolled curb/gutter w/ new vertical curb/gutter Repace 15 x 40 area adjacent to new curb/gutter Rebuild 6 x 40' level sidewalk Install a new sign and pole		




SB 44th St & Roosevelt Ave (NS)	Priority: 3	Stop ID: 2665 4 on, 9 off
<p>Relocate stop 150' north to the near side of Roosevelt Ave Secure ROW at 4317 Roosevelt Ave (APN 020-0293-010) Construct new 4 x 8' concrete pad and appropriate retaining walls behind sidewalk Install new bench Install new sign and pole Replace 3 x 60' rolled curb/gutter w/ new vertical curb/gutter Repace 17 x 60' area adjacent to new curb/gutter Rebuild 6 x 60' level sidewalk</p>		

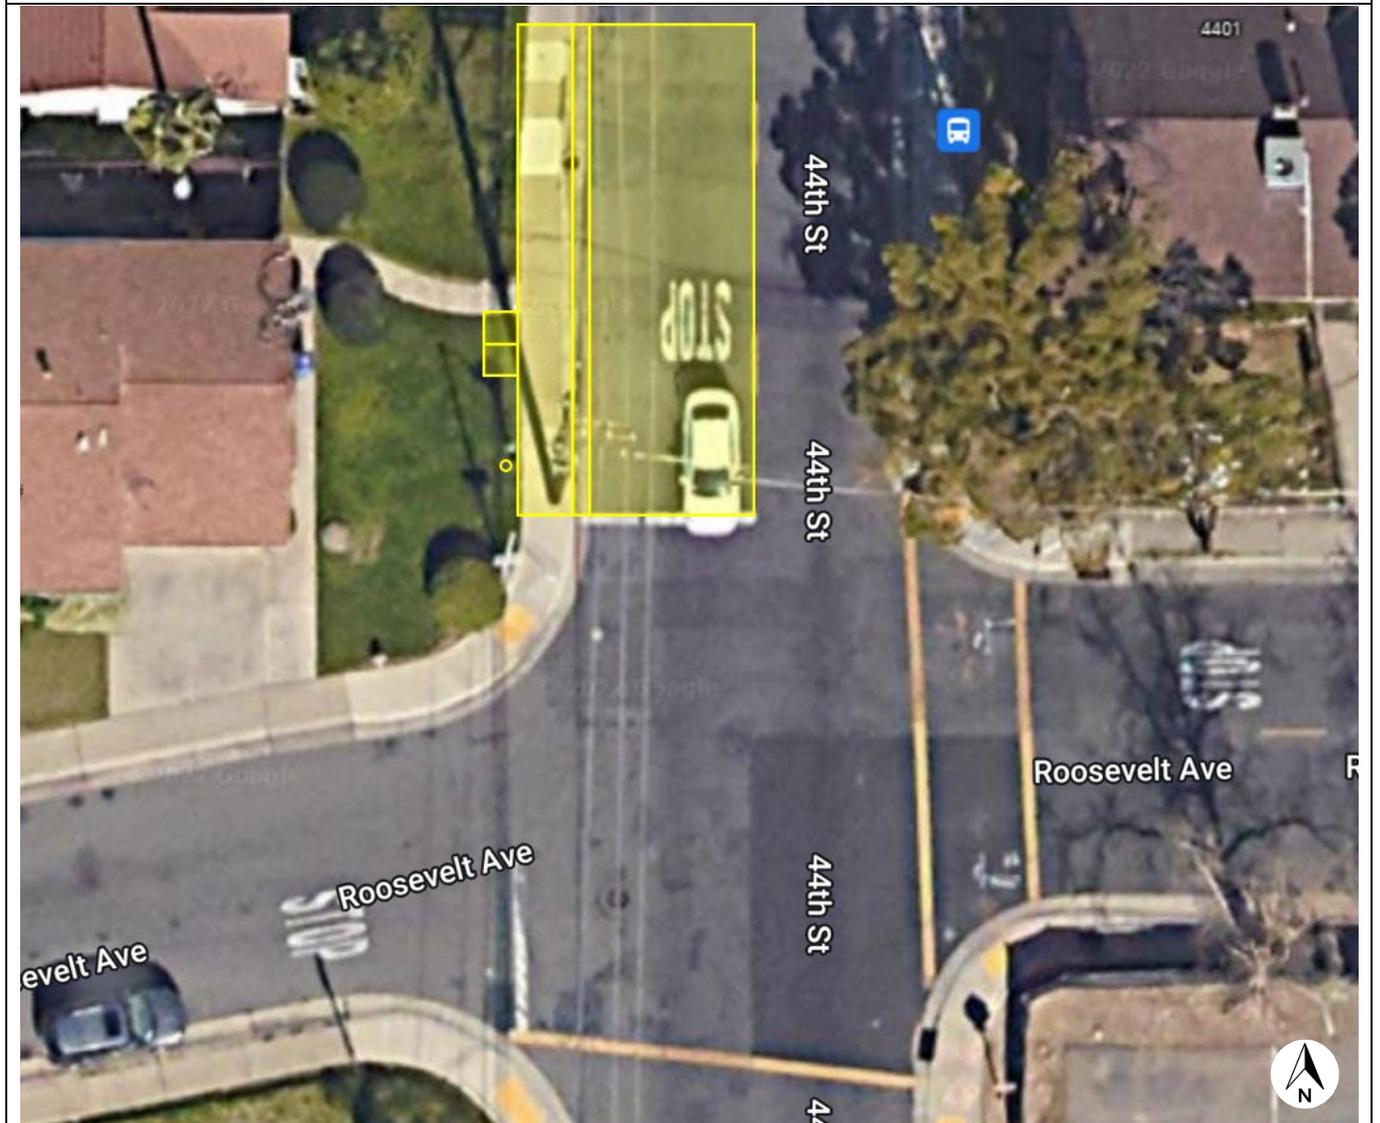


WB 23rd Ave & 44th St (NS)	Priority: NA	Stop ID: 2666 3 on, 13 off
---------------------------------------	---------------------	---

Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
Consider new crossing or relocating bus stop (out of scope)

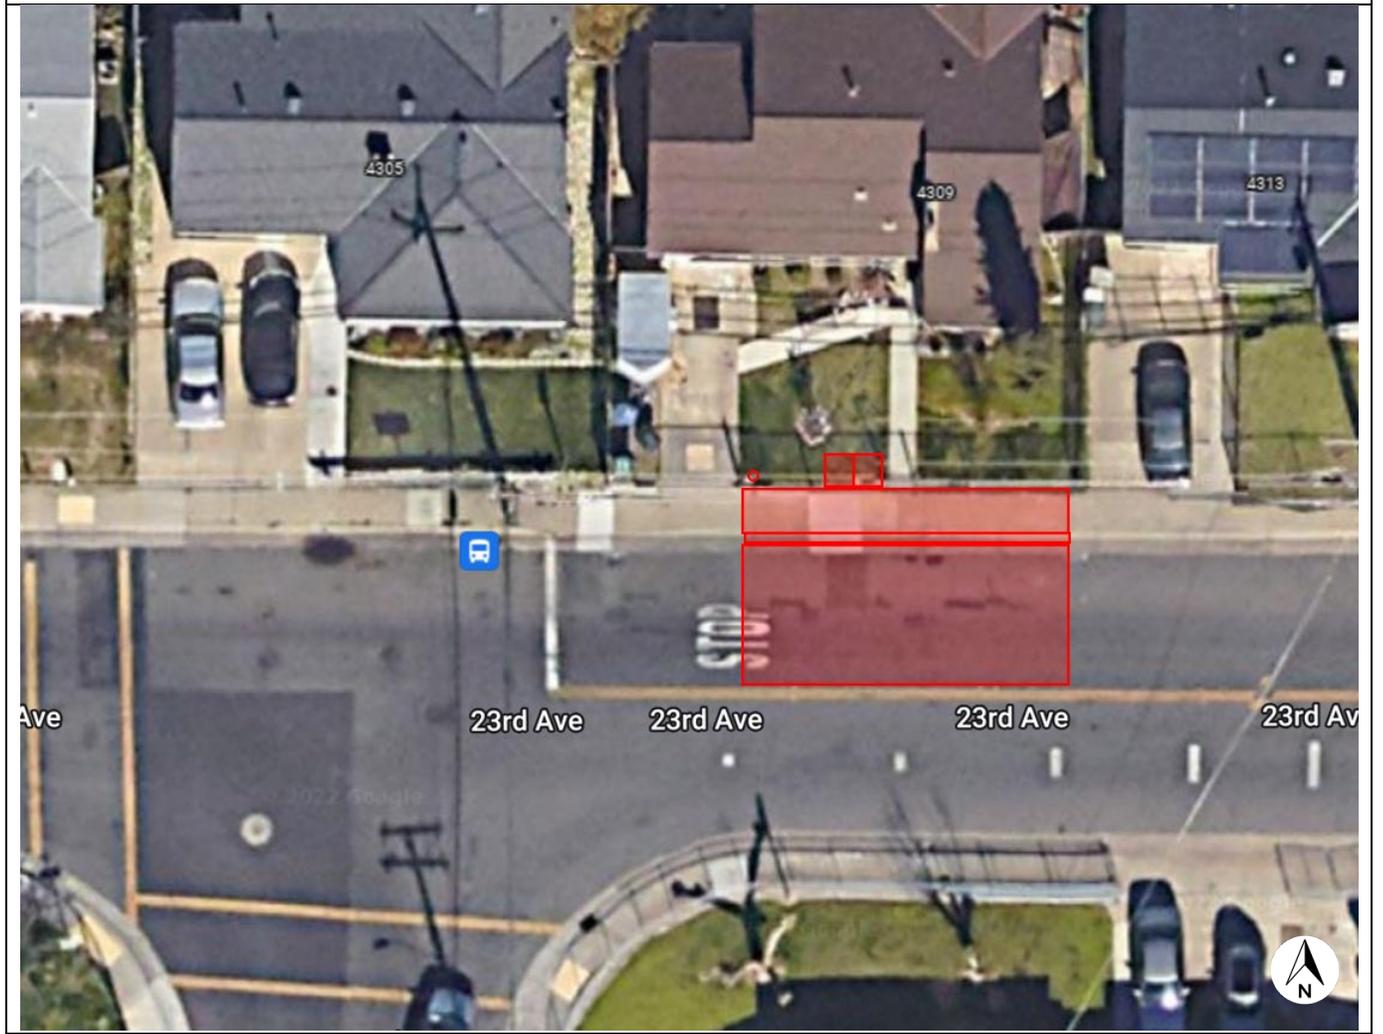


NB 44th St & 23rd Ave (NS)	Priority: NA	Stop ID: 2707 9 on, 9 off
---------------------------------------	---------------------	--

Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
Consider new crossing or relocating bus stop (out of scope)

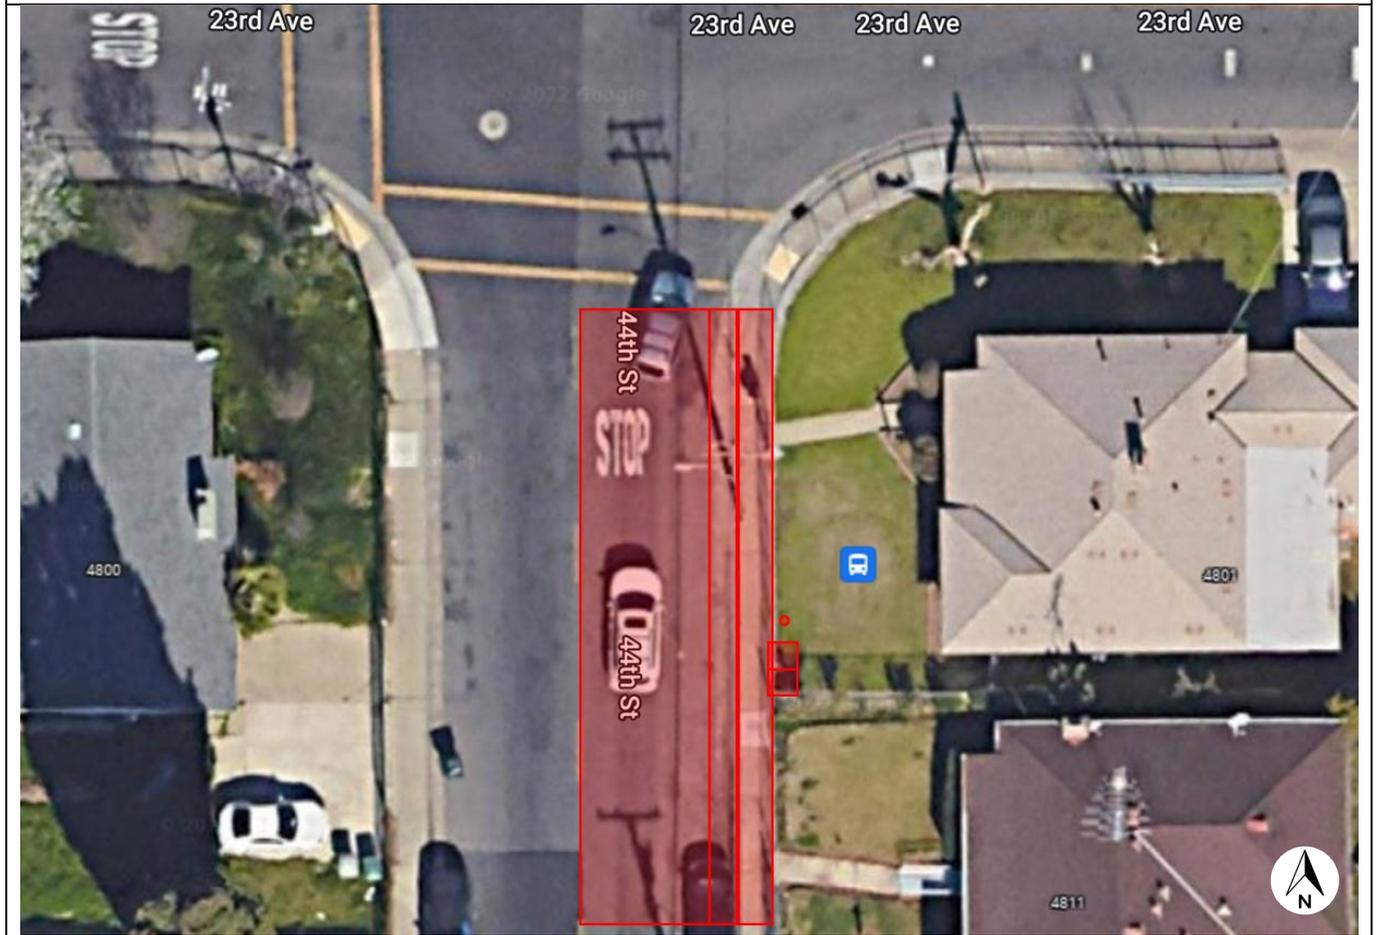

NB 44th St & Sierra Vista Ave (FS)	Priority: 3	Stop ID: 2706 8 on, 3 off
---	--------------------	--

Secure ROW at 5101 44th St (APN 022-0122-001)
Construct new 4 x 16' concrete pad behind sidewalk
Replace 3 x 100' rolled curb/gutter w/ new vertical curb/gutter
Repave 17 x 100' area adjacent to new curb/gutter
Rebuild 4 x 100' level sidewalk
Install new sign and pole

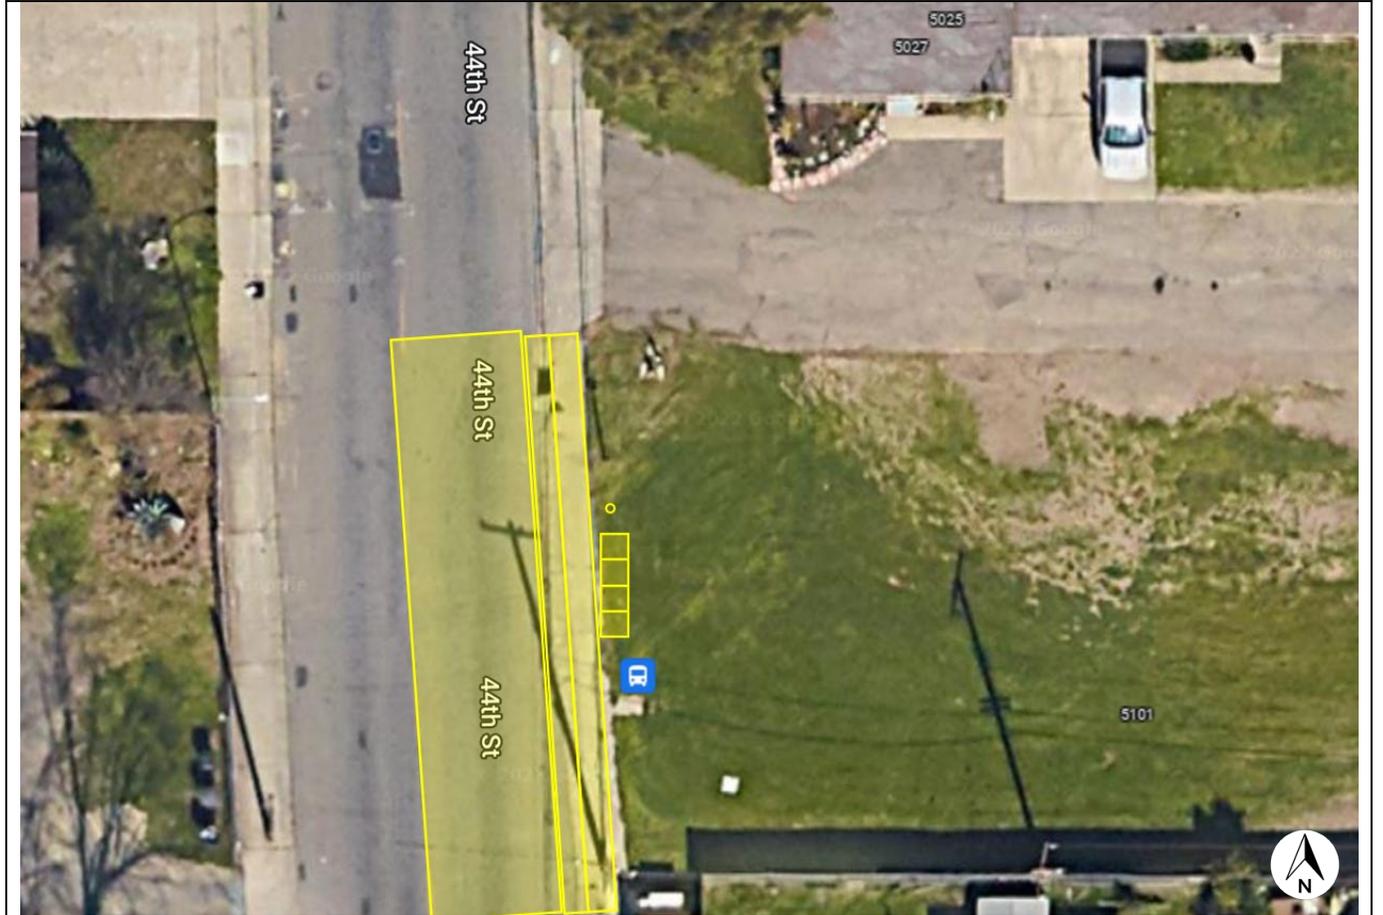

SB 44th St & 25th St (NS)	Priority: NA	Stop ID: 2667 4 on, 9 off
--------------------------------------	---------------------	--

Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
Consider new crossing or relocating bus stop (out of scope)




SB 44th St & Fruitridge Rd (MB)	Priority: NA	Stop ID: 2670 7 on, 11 off
--	---------------------	--------------------------------------

Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
Consider new crossing or relocating bus stop (out of scope)




NB 44th St & Fruitridge Rd (FS)	Priority: 6	Stop ID: 2704 25 on, 12 off
--	--------------------	--

Secure ROW at 4305 Fruitridge Rd (APN 022-0252-026)
Construct new 4 x 16' concrete pad with protective curbs behind sidewalk
Remove existing telephone booth
Install new 8' shelter and electrical connection
Install protective curb around concrete pad
Install new sign and pole

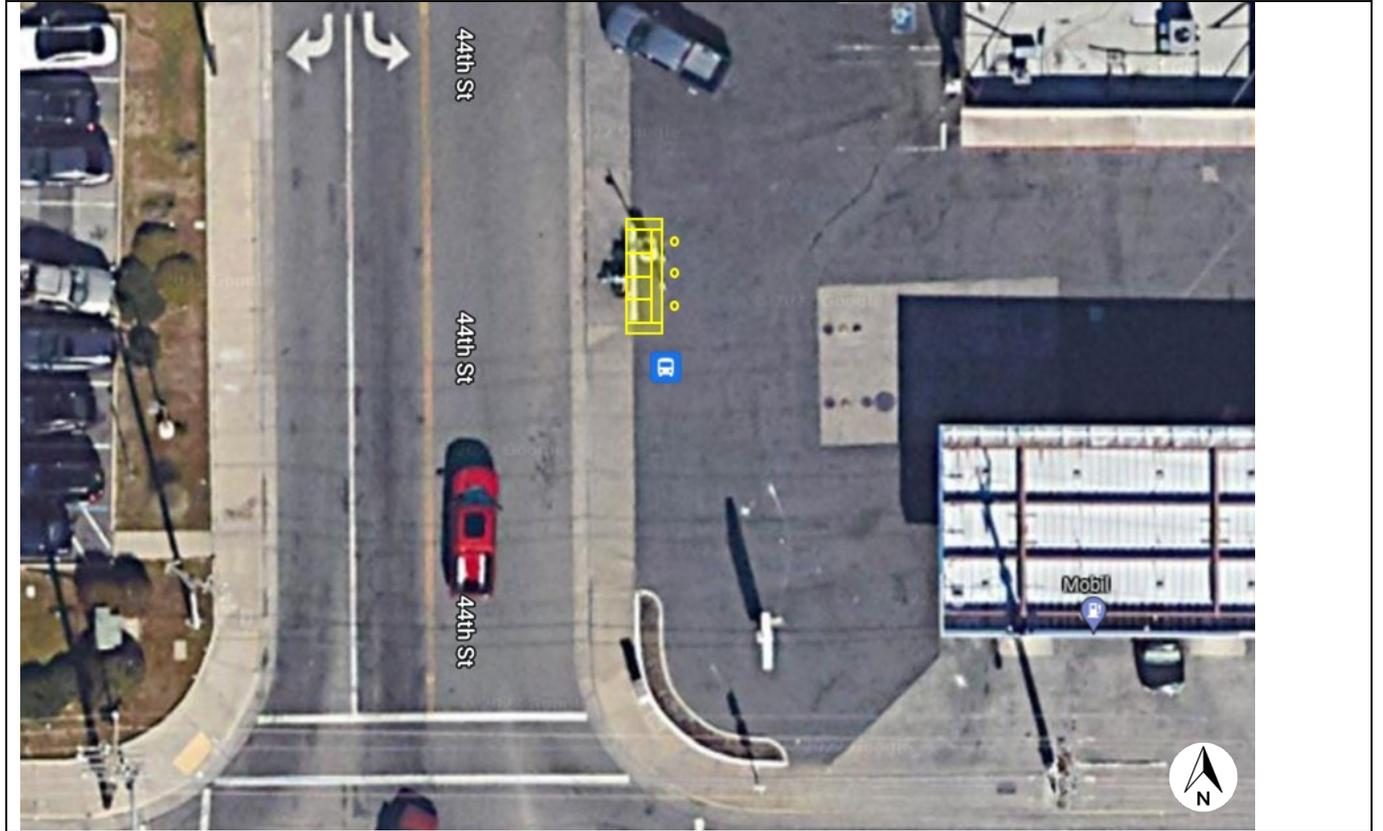

SB 44th St & Fruitridge Rd (FS)	Priority: 4	Stop ID: 2671 6 on, 6 off
--	--------------------	--

Secure ROW at 4320 Fruitridge Rd (APN 026-0041-022)
Construct new 4 x 16' concrete pad behind sidewalk

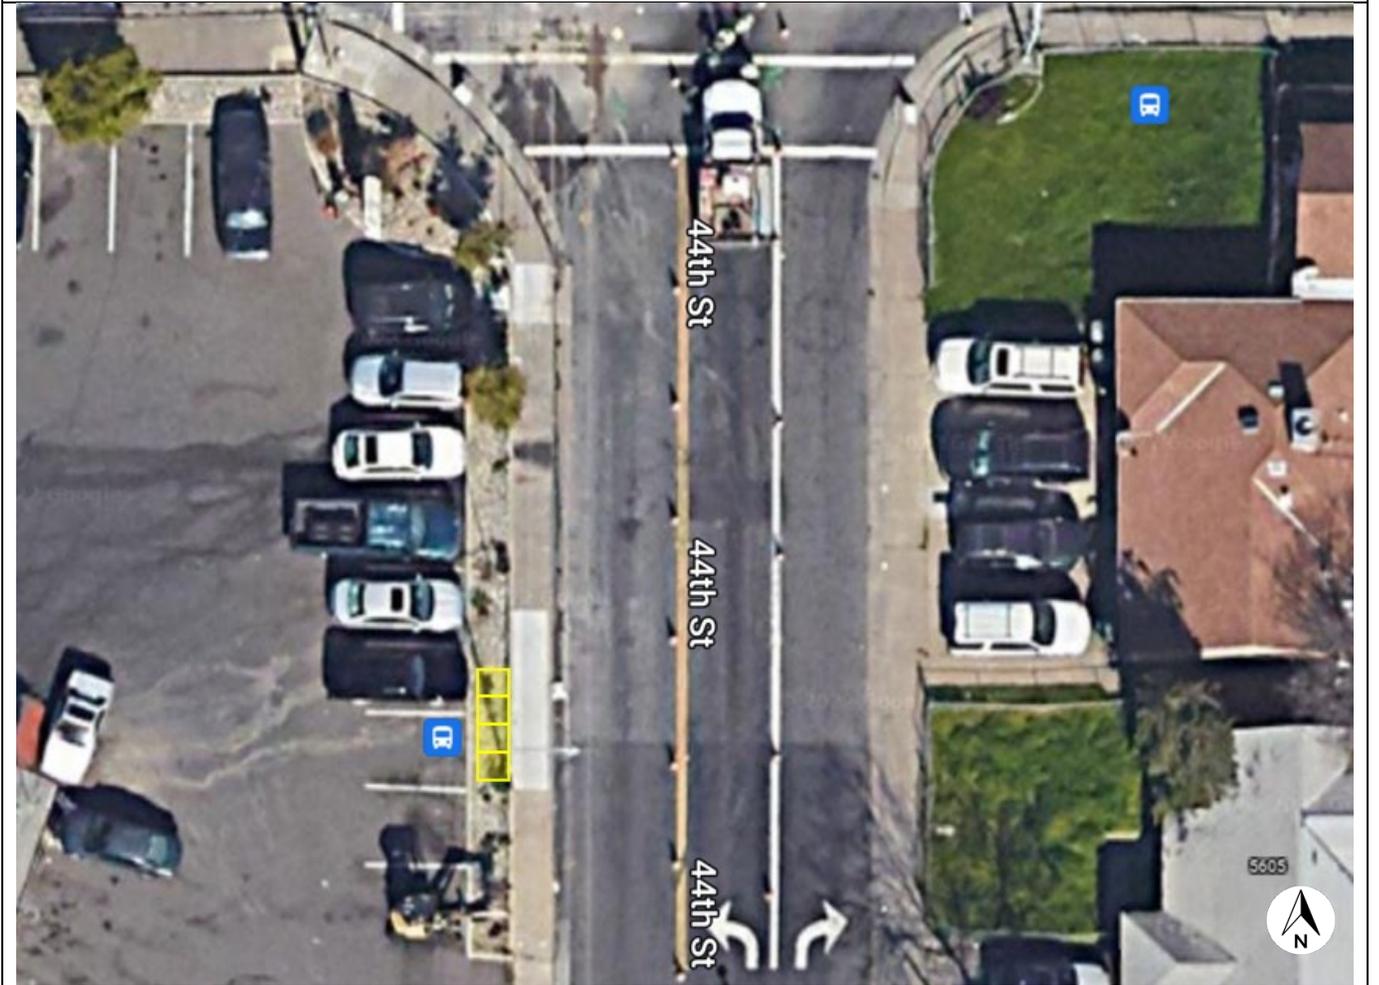


SB 44th St & Iowa Ave (NS)	Priority: 4	Stop ID: 2672 6 on, 4 off
---------------------------------------	--------------------	--

Secure ROW at 4331 Iowa Ave (APN 026-0261-001)
Construct new 4 x 16' concrete pad behind sidewalk
Replace 3 x 100' rolled curb/gutter w/ new vertical curb/gutter
Repave 13 x 100' area adjacent to new curb/gutter
Rebuild 4 x 100' level sidewalk



NB 44th St & Iowa Ave (FS)	Priority: NA	Stop ID: 2703 5 on, 7 off
---------------------------------------	---------------------	--

Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
Consider new crossing or relocating bus stop (out of scope)

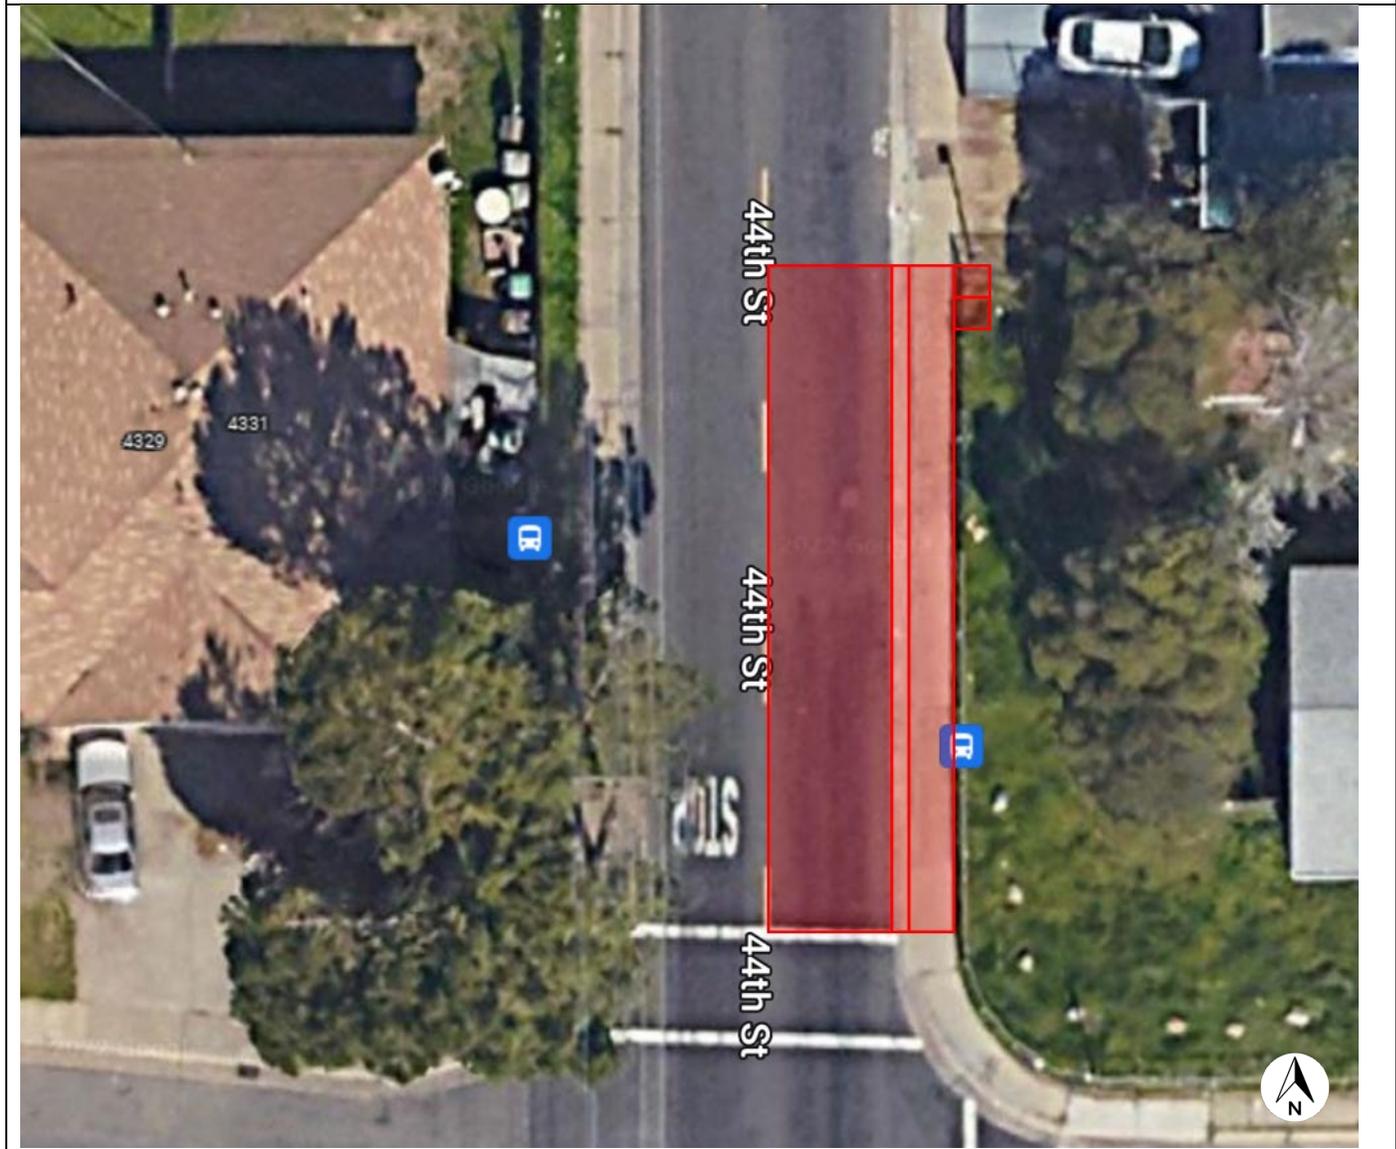


NB 44th St & 37th Ave (FS)	Priority: 3	Stop ID: 2700 10 on, 4 off
---------------------------------------	--------------------	---

Secure ROW at 4401 37th Ave (APN 026-0141-012)
Construct new 4 x 8' concrete pad behind sidewalk
Replace 3 x 60' rolled curb/gutter w/ new vertical curb/gutter
Repave 13 x 60' area adjacent to new curb/gutter
Rebuild 6 x 60' level sidewalk




SB 44th St & 37th Ave (FS)	Priority: NA	Stop ID: 2675 4 on, 9 off
---------------------------------------	---------------------	--

Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
Consider new crossing or relocating bus stop (out of scope)

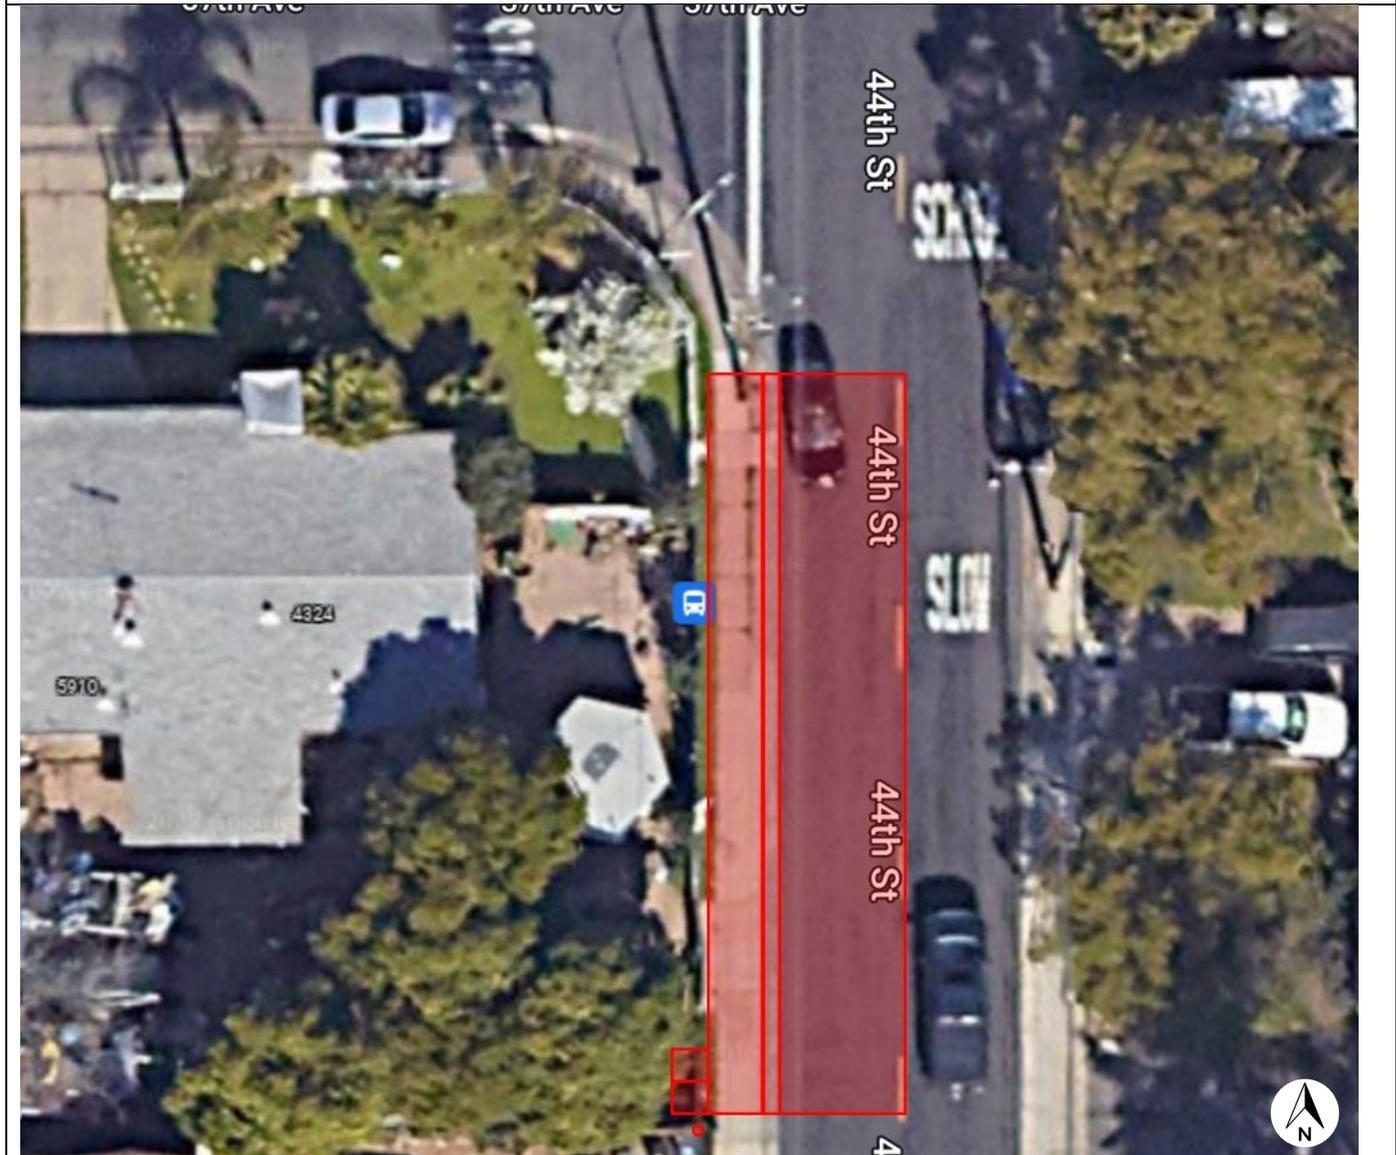


NB 44th St & 39th Ave (FS)	Priority: 3	Stop ID: 2699 9 on, 4 off
---------------------------------------	--------------------	--

Secure ROW at 4400 39th Ave (APN 037-0042-001)
Construct new 4 x 16' concrete pad behind sidewalk
Replace 3 x 100' rolled curb/gutter w/ new vertical curb/gutter
Repave 13 x 100' area adjacent to new curb/gutter
Rebuild 5 x 100' level sidewalk
Install new pole and relocate existing sign

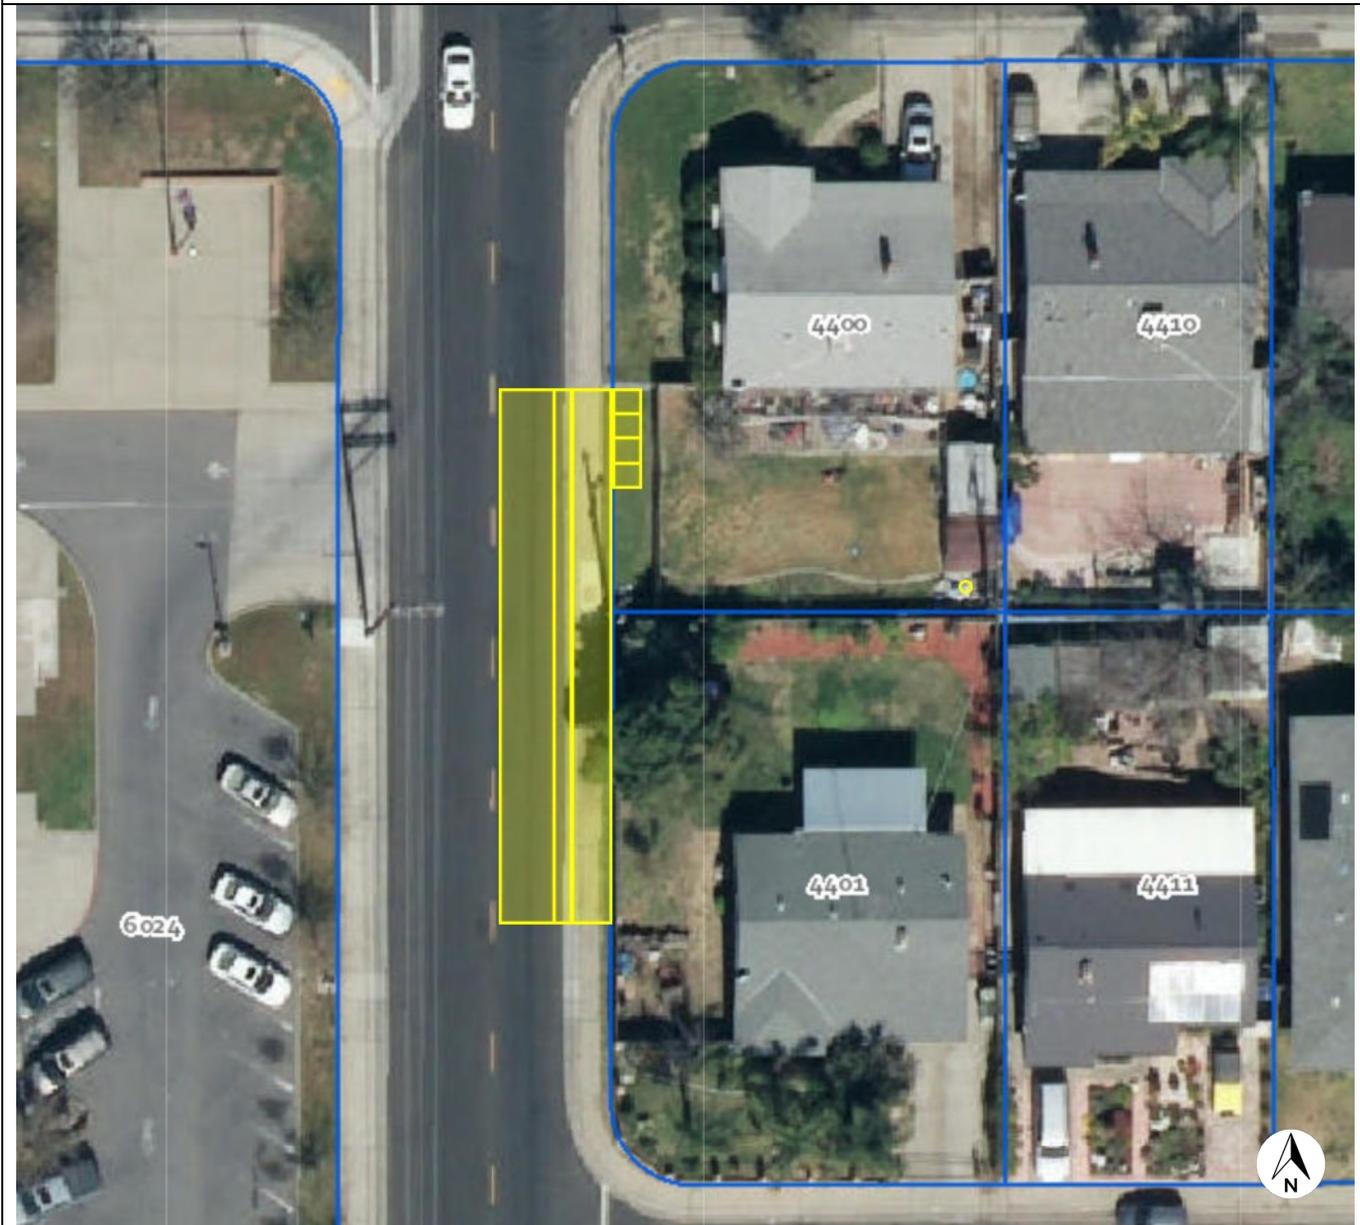


SB 44th St & 39th Ave (MB)	Priority: 4	Stop ID: 2676 5 on, 6 off
---------------------------------------	--------------------	--

Secure ROW at 4304 39th Ave (APN 037-0036-001)
Construct new 4 x 16' concrete pad behind sidewalk
Replace 3 x 100' rolled curb/gutter w/ new vertical curb/gutter
Repave 17 x 100' area adjacent to new curb/gutter
Rebuild 6 x 100' level sidewalk
Relocate existing sign and pole
Install bench

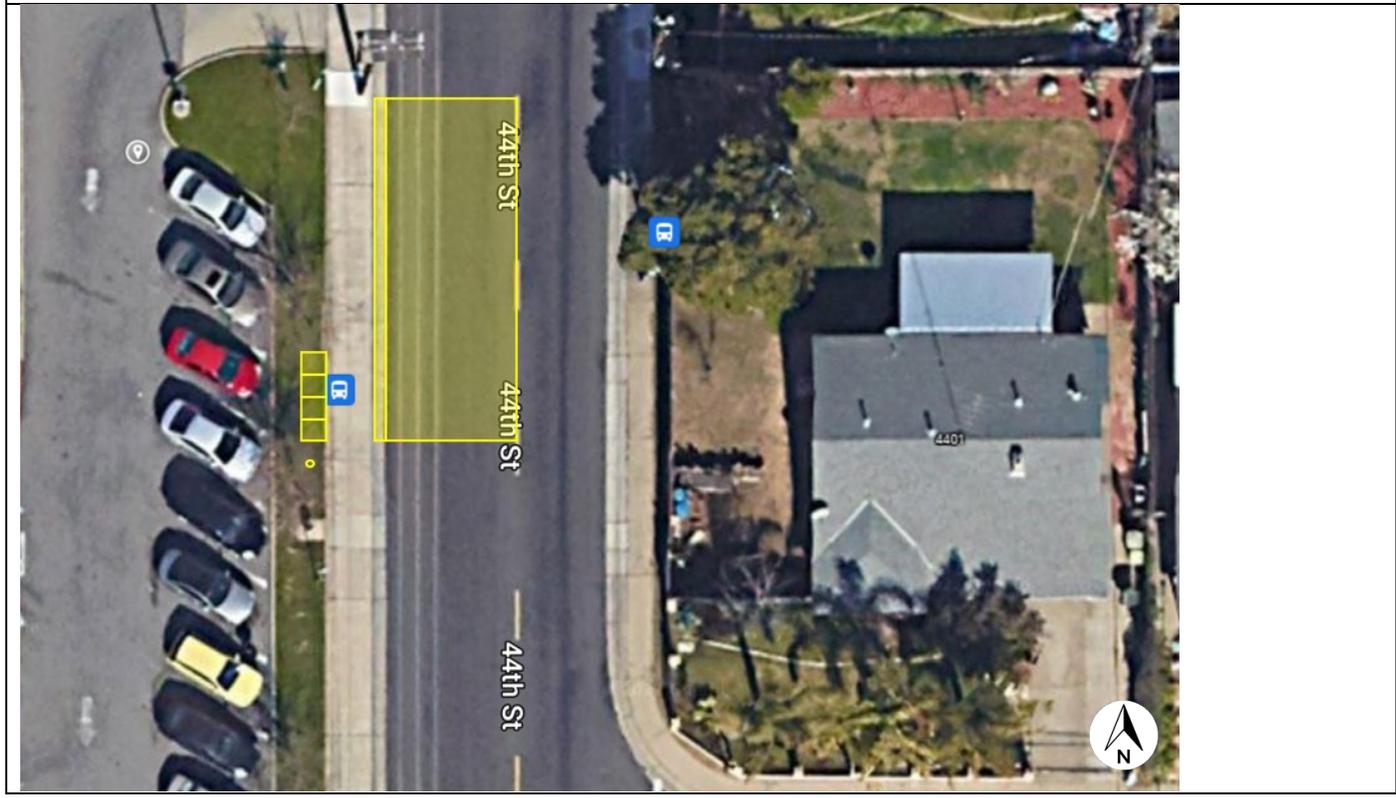


NB 44th St & Lemon Hill Ave (NS)	Priority: 3	Stop ID: 2696 8 on, 6 off
---	--------------------	--

Secure ROW at 4400 Lemon Hill Ave (APN 037-0044-001)
Construct new 4 x 8' concrete pad behind sidewalk
Replace 3 x 100' rolled curb/gutter w/ new vertical curb/gutter
Repave 13 x 100' area adjacent to new curb/gutter
Rebuild 5 x 100' level sidewalk

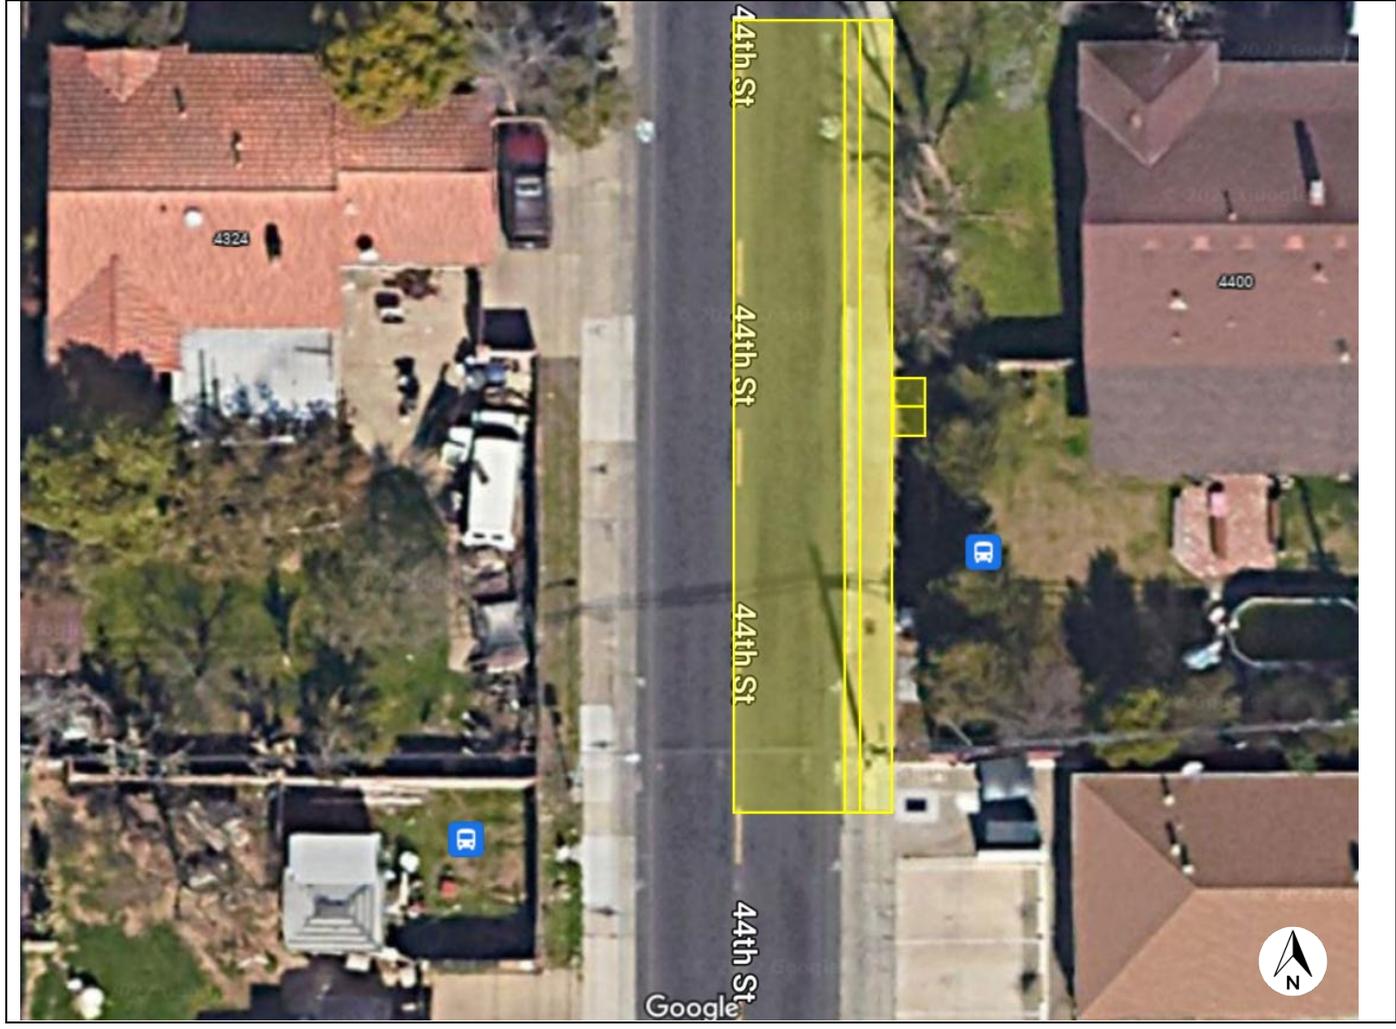


SB 44th St & 41st Ave (MB)	Priority: 4	Stop ID: 2679 8 on, 12 off
---------------------------------------	--------------------	---

Secure ROW at 4324 41st Ave (APN 037-0113-019)
Construct new 4 x 16' concrete pad behind sidewalk
Replace 3 x 75' rolled curb/gutter w/ new vertical curb/gutter
Repave 13 x 75' area adjacent to new curb/gutter
Rebuild 4 x 75' level sidewalk
Install bench

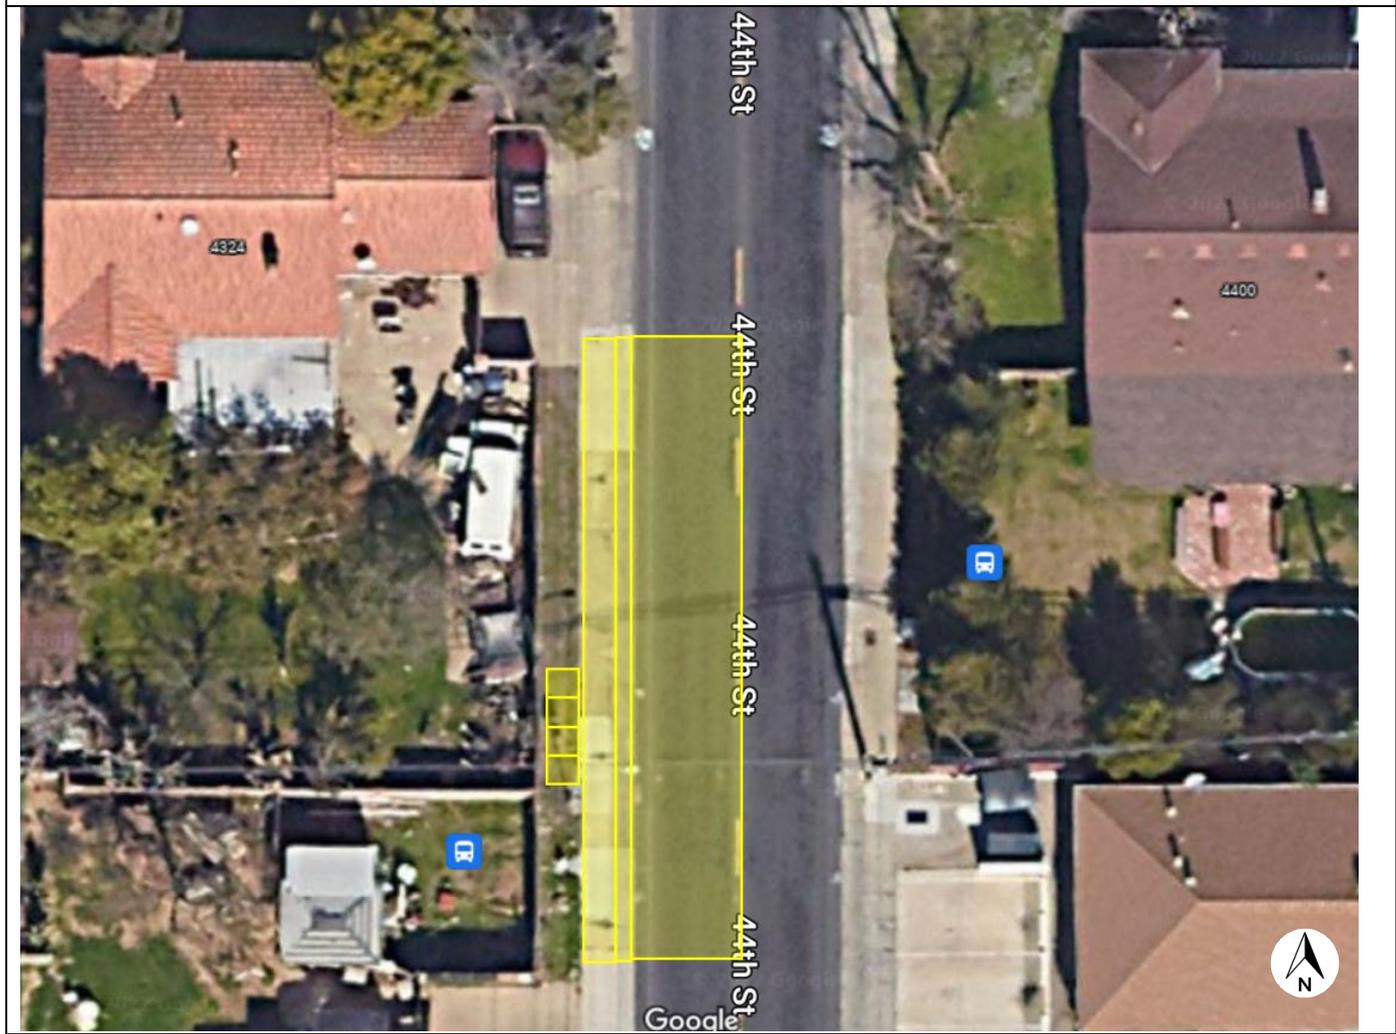


NB 44th St & 44th Ave (MB)	Priority: NA	Stop ID: 2695 3 on, 2 off
---------------------------------------	---------------------	--

Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
Consider new crossing or relocating bus stop (out of scope)

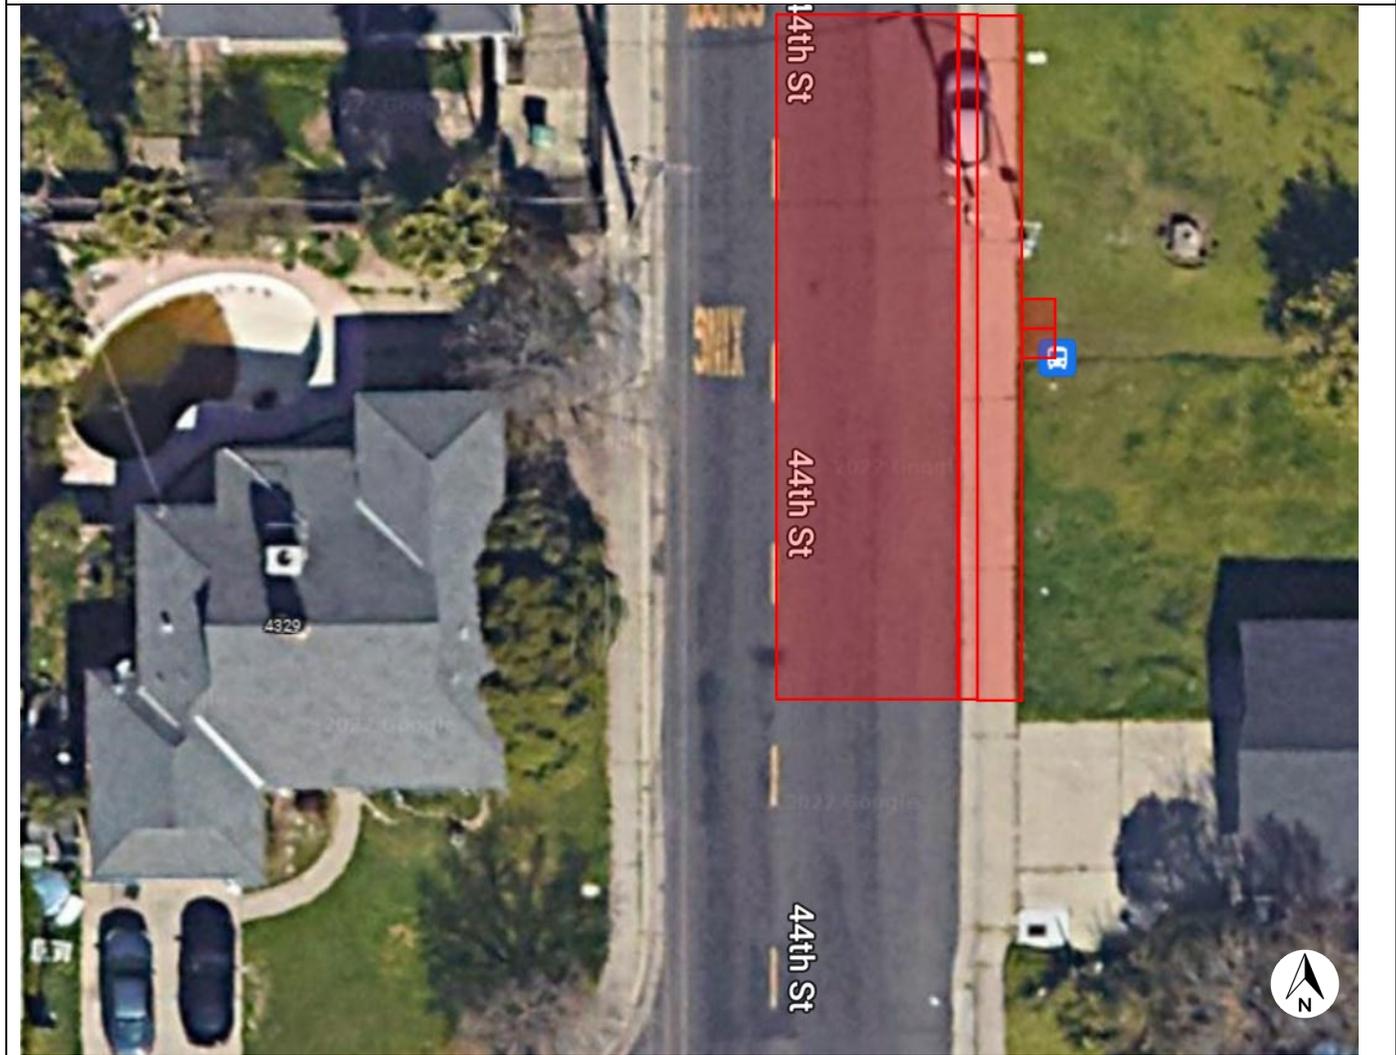


SB 44th St & 44th Ave (FS)	Priority: NA	Stop ID: 2680 2 on, 2 off
---------------------------------------	---------------------	--

Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
Consider new crossing or relocating bus stop (out of scope)

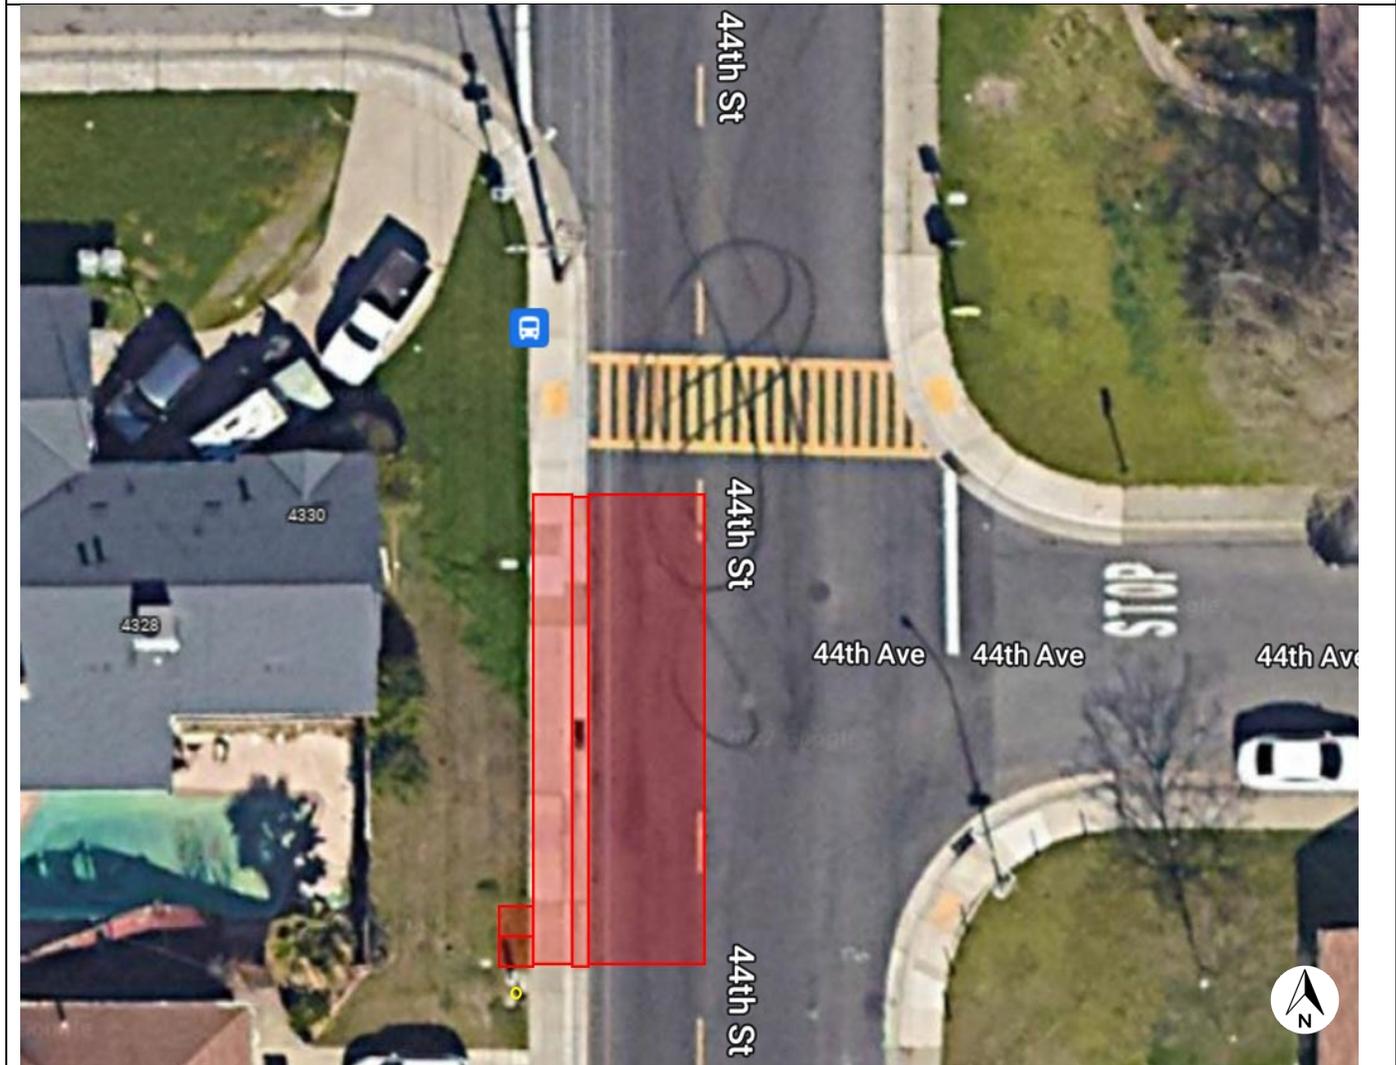


SB 44th St & 45th Ave (NS)	Priority: NA	Stop ID: 2681 8 on, 13 off
---------------------------------------	---------------------	---

Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
Consider new crossing or relocating bus stop (out of scope)

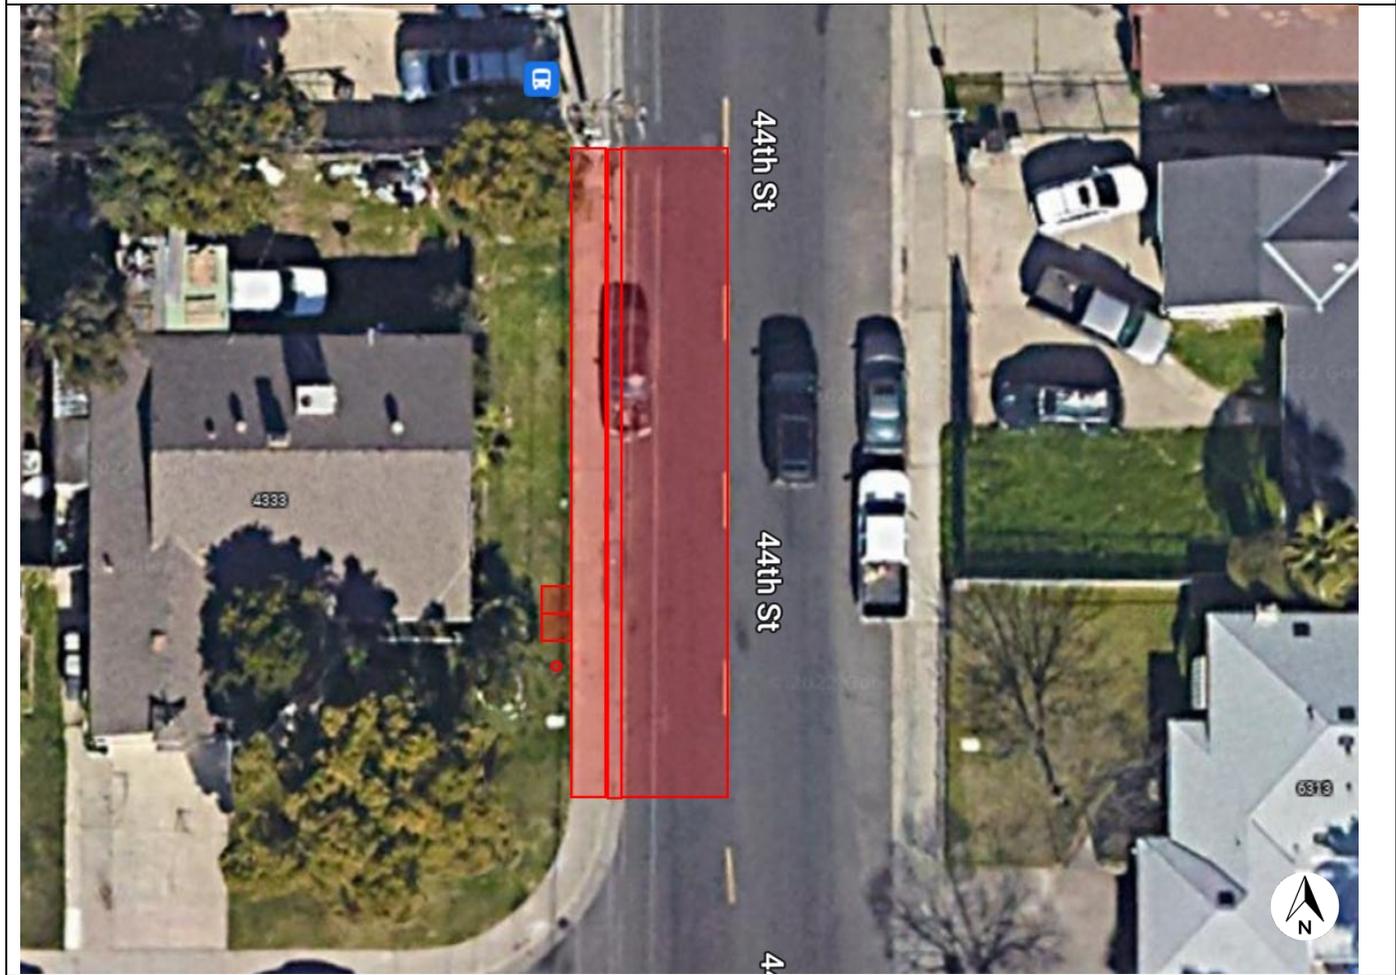

NB 44th St & 47th Ave (FS)	Priority: 6	Stop ID: 2694 14 on, 7 off
---------------------------------------	--------------------	---


Relocate stop approx. 50' south
Secure ROW at 4401 47th Ave (APN 037-0271-020)
Construct new 4 x 16' concrete pad behind sidewalk
Replace 3 x 70' rolled curb/gutter w/ new vertical curb/gutter
Repave 21 x 70' area adjacent to new curb/gutter
Rebuild 7 x 70' level sidewalk
Install bench
Install new pole and sign

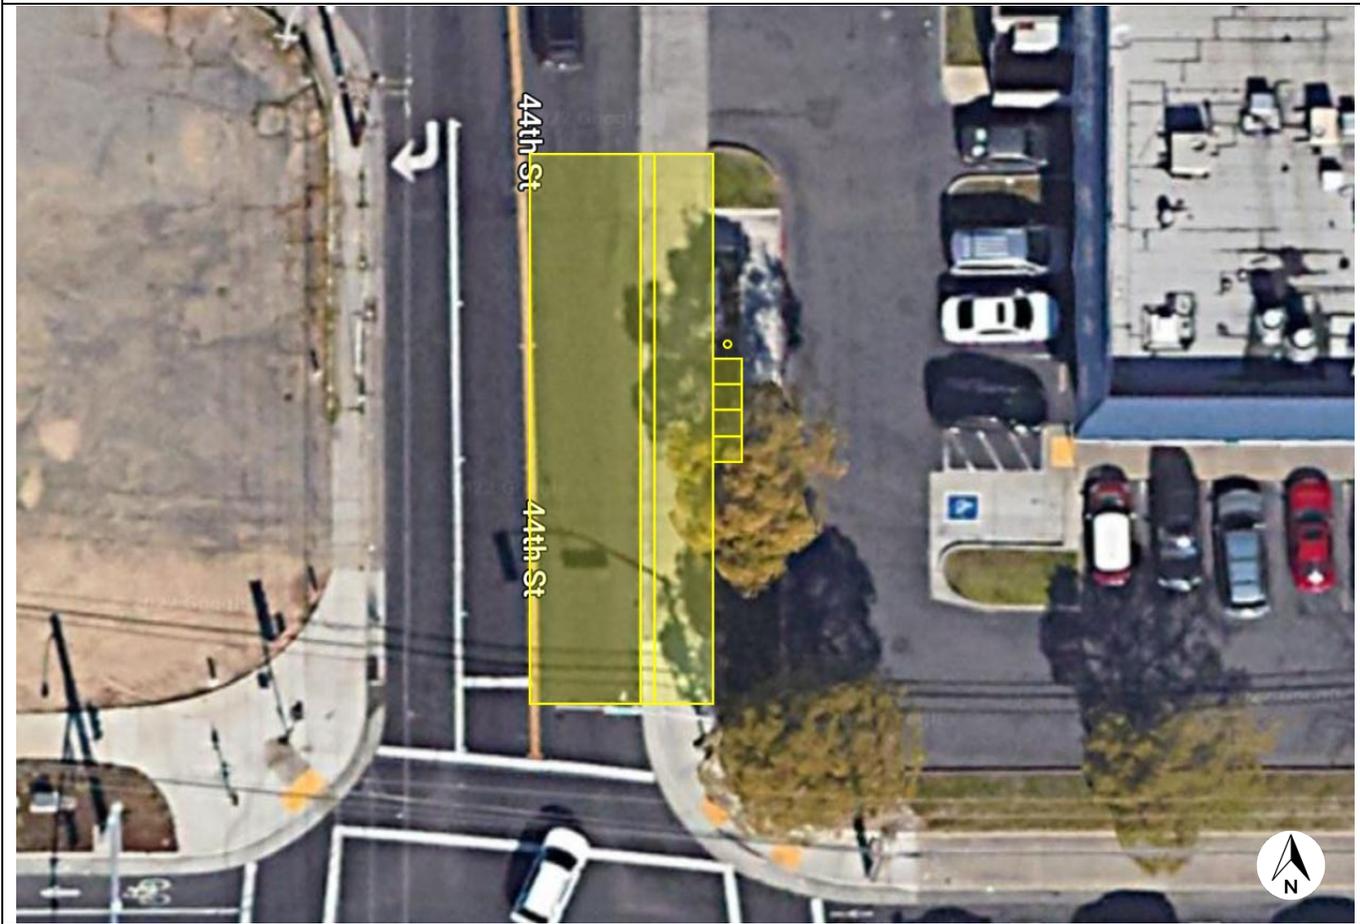


Corridor #45 Fruitridge Rd

Lawrence Dr to Power Inn Rd

Jurisdiction:
Sacramento County

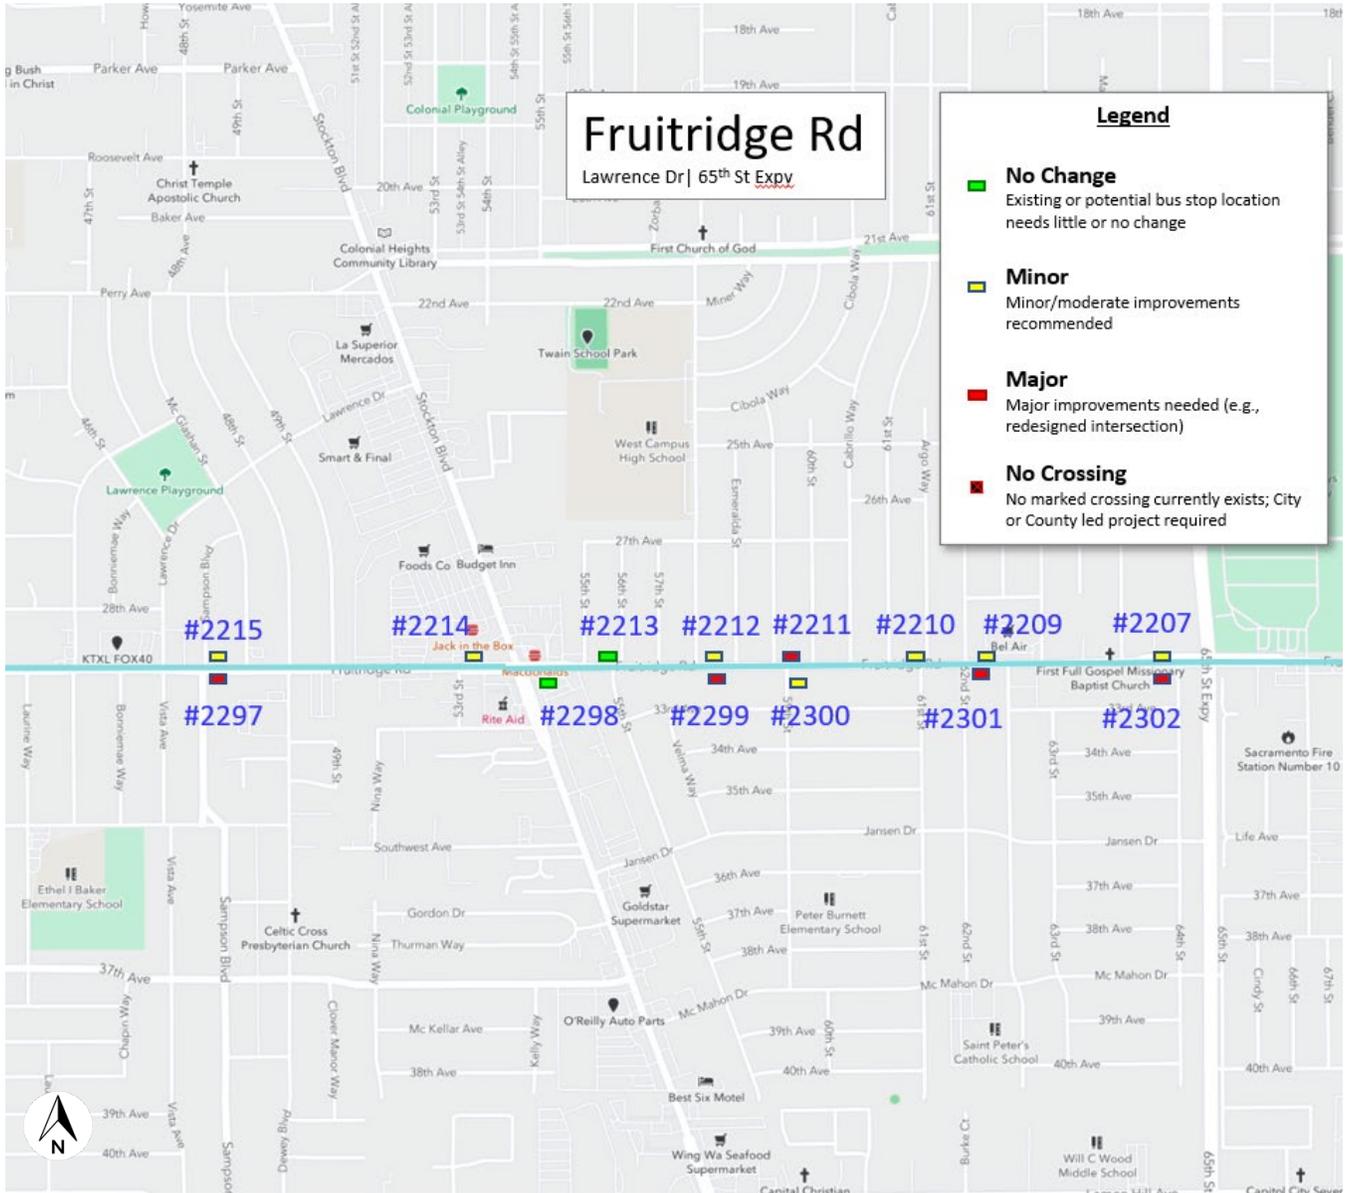

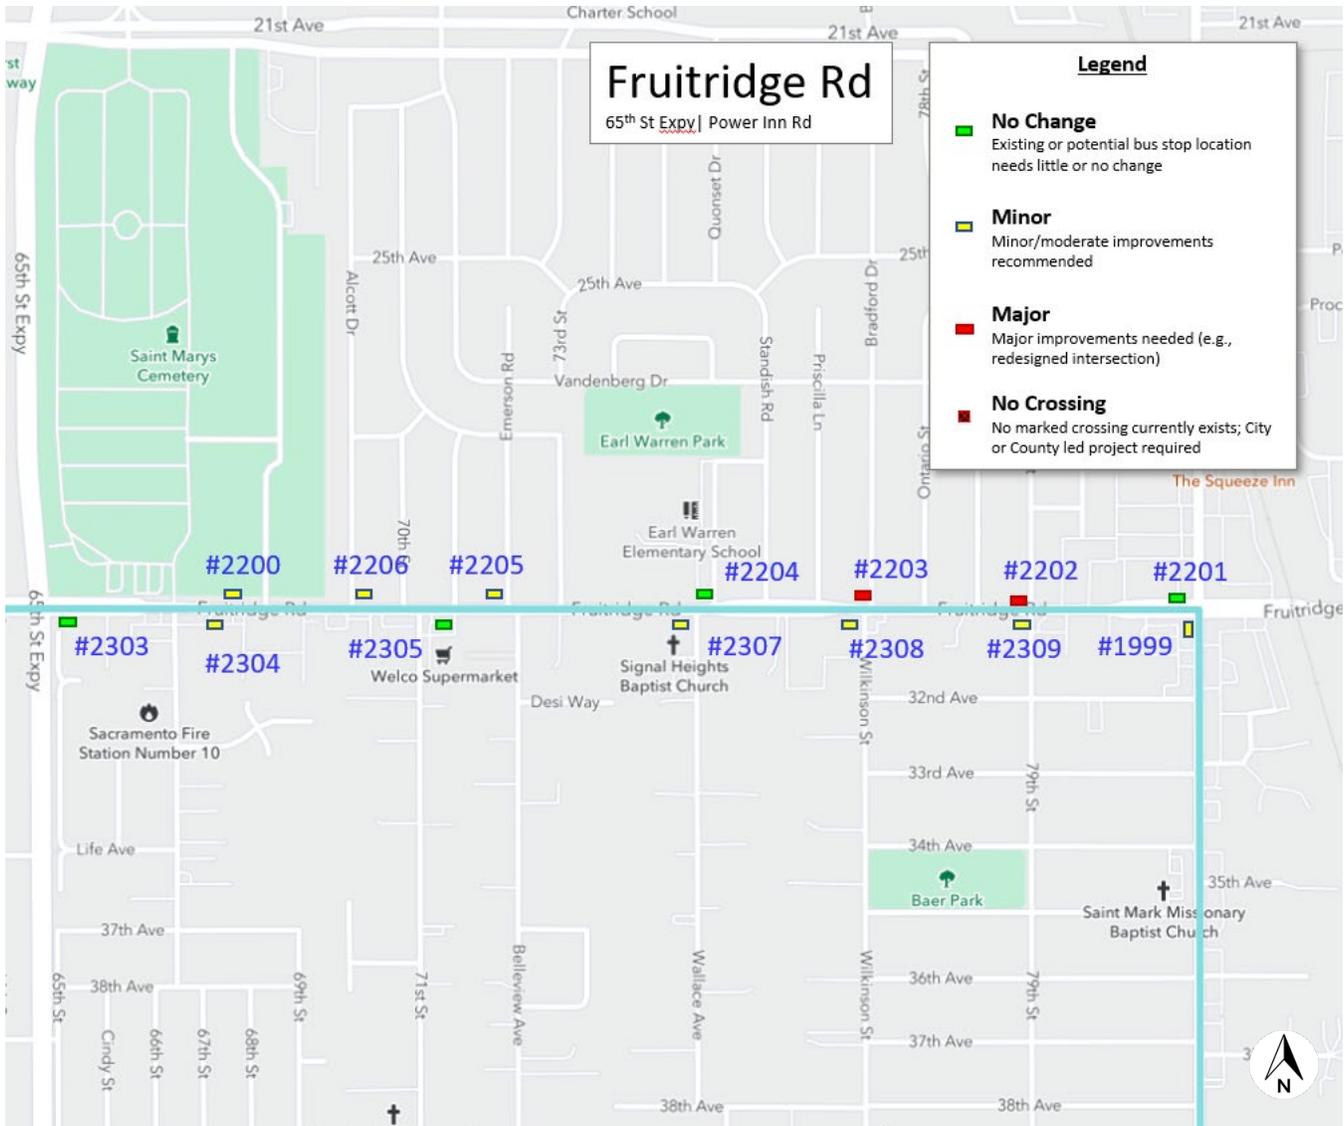

Corridor Length:
1.25 miles

Number of Stops:
 5 – No Changes Needed
 18 – Minor/Moderate Changes Recommended
 7 – Major Changes Needed – Not Currently Feasible
 0 – crossings needed

Total Cost:

\$670,500	Design, project approvals
\$1,188,000	Construction

\$1,858,500	Total
-------------	-------


Notes:

Corridor Priority: 3.8

<p>EB Fruitridge Rd & Sampson Blvd (FS)</p>	<p>Priority: NA</p>	<p>Stop ID: 2297 3 on, 9 off</p>
<p>Secure ROW at 4860 Fruitridge Rd (APN 026-0063-032) Construct new 4 x 16' concrete pad behind sidewalk</p>		


WB Fruitridge Rd & Mcglashan St (FS)	Priority: 3	Stop ID: 2215 13 on, 5 off
---	--------------------	---------------------------------------

Secure ROW at 5560 McGlashan St (APN 022-0271-030)
Construct new 4 x 16' concrete pad behind sidewalk
Install bench

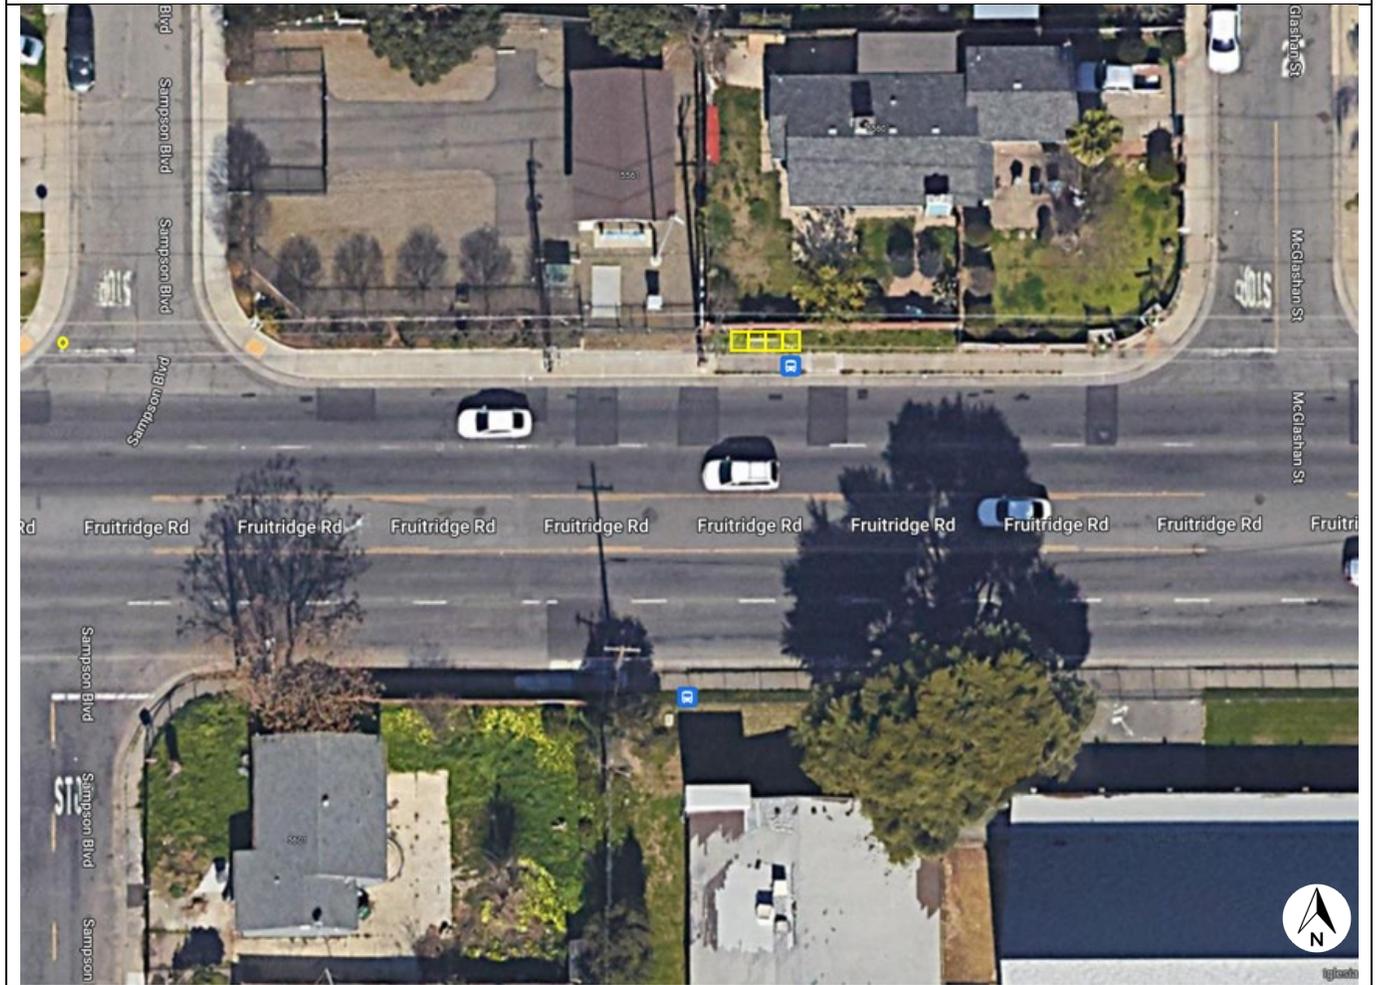


WB Fruitridge Rd & Stockton Blvd (NS)	Priority: 6	Stop ID: 2214 37 on, 22 off
--	--------------------	--

Secure ROW at 5305 Fruitridge Rd (APN 022-0280-017)
Construct new 4 x 48' concrete pad behind sidewalk
Install new 16' shelter and electrical connection
Relocate existing sign and pole

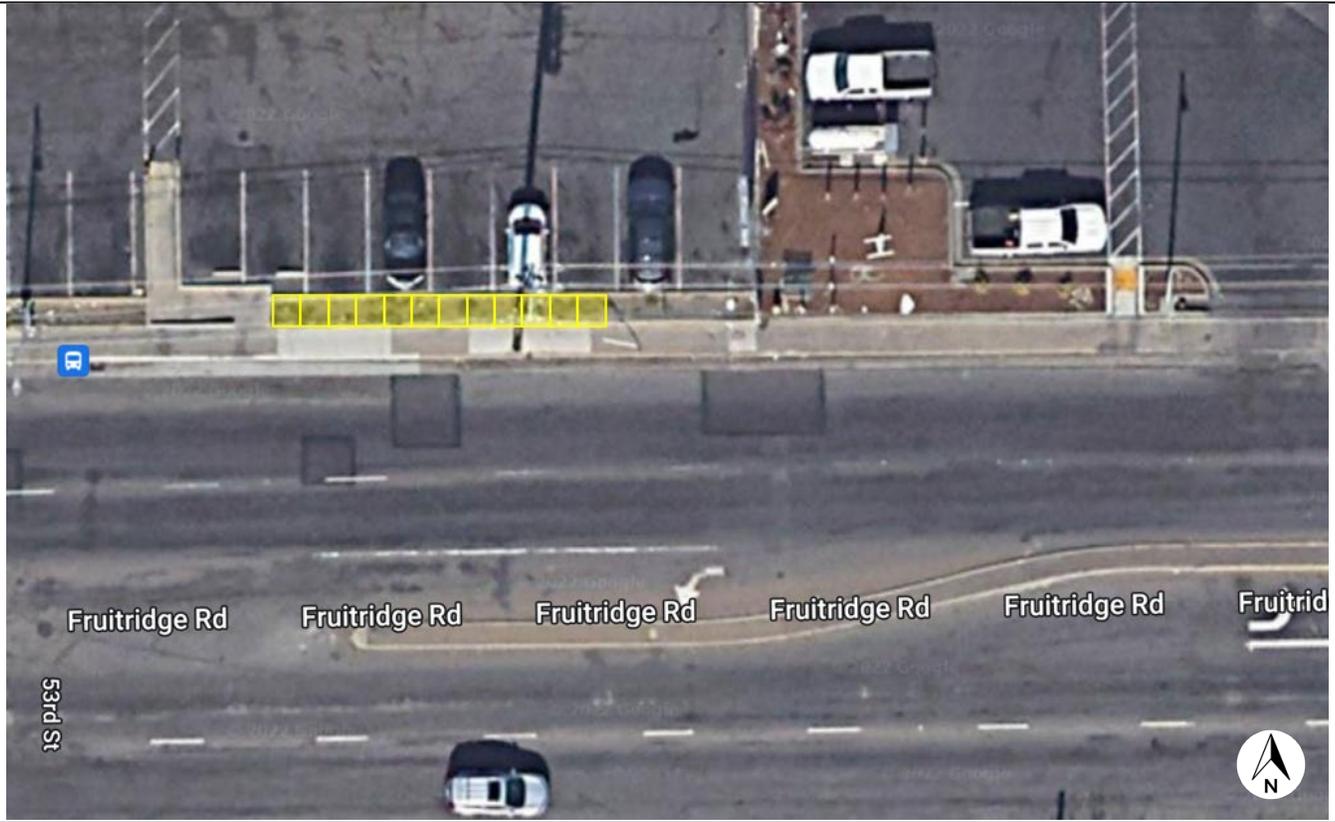

WB Fruitridge Rd & 56th St (FS)	Priority: 2	Stop ID: 2214 6 on, 6 off
--	--------------------	--

Install new sign and pole

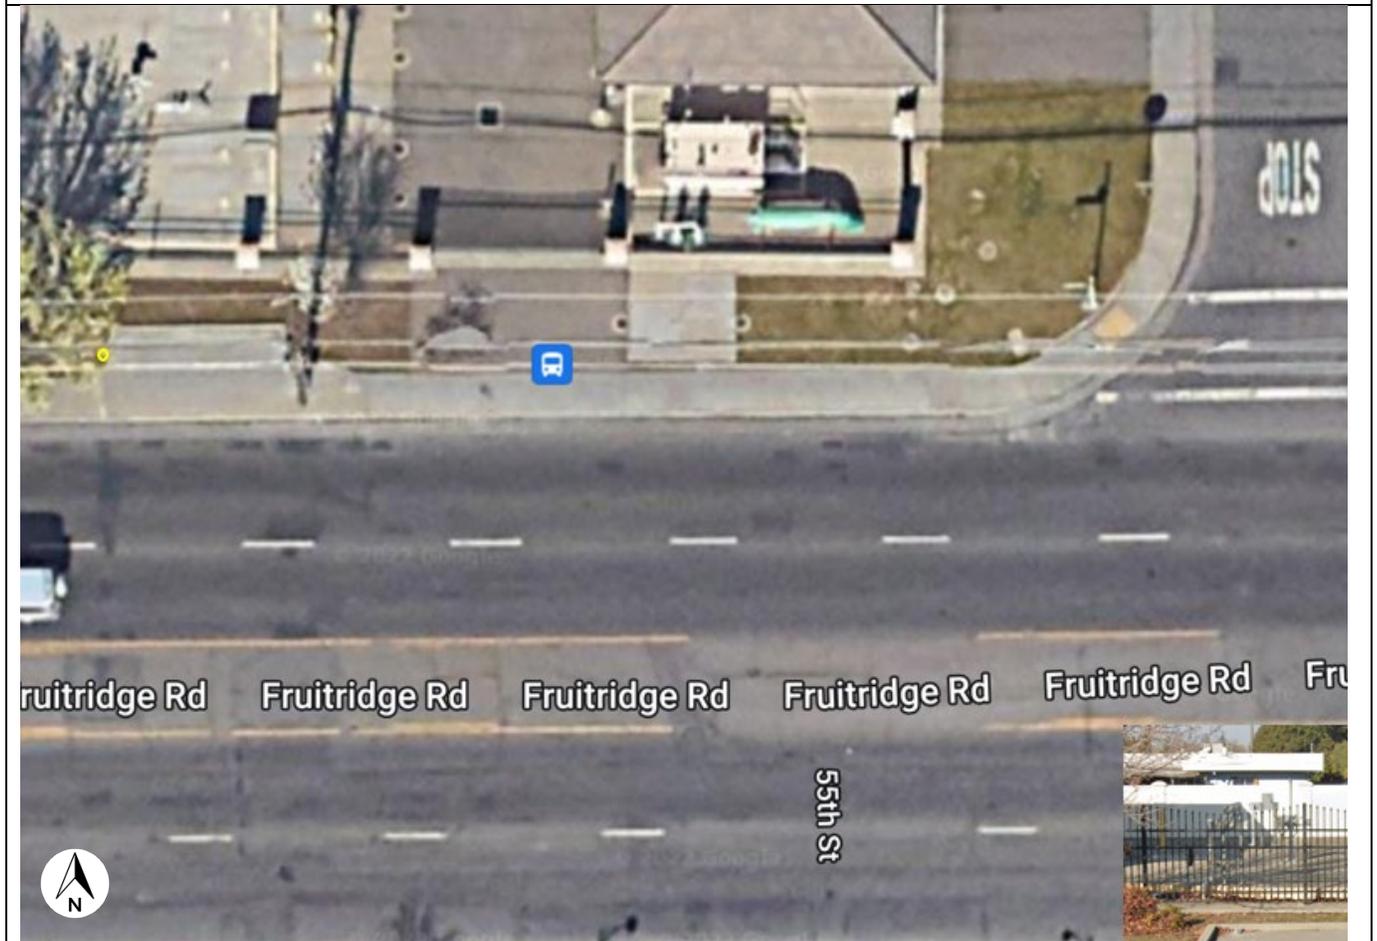


WB Fruitridge Rd & 58th St (NS)	Priority: NA	Stop ID: 2212 3 on, 8 off
--	---------------------	--

Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
8-foot sidewalk or landing needed, per standard; however, acquisition of necessary space appears infeasible




EB Fruitridge Rd & 58th St (FS)	Priority: NA	Stop ID: 2299 12 on, 3 off
--	---------------------	---

Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
8-foot sidewalk or landing needed, per standard; however, acquisition of necessary space appears infeasible

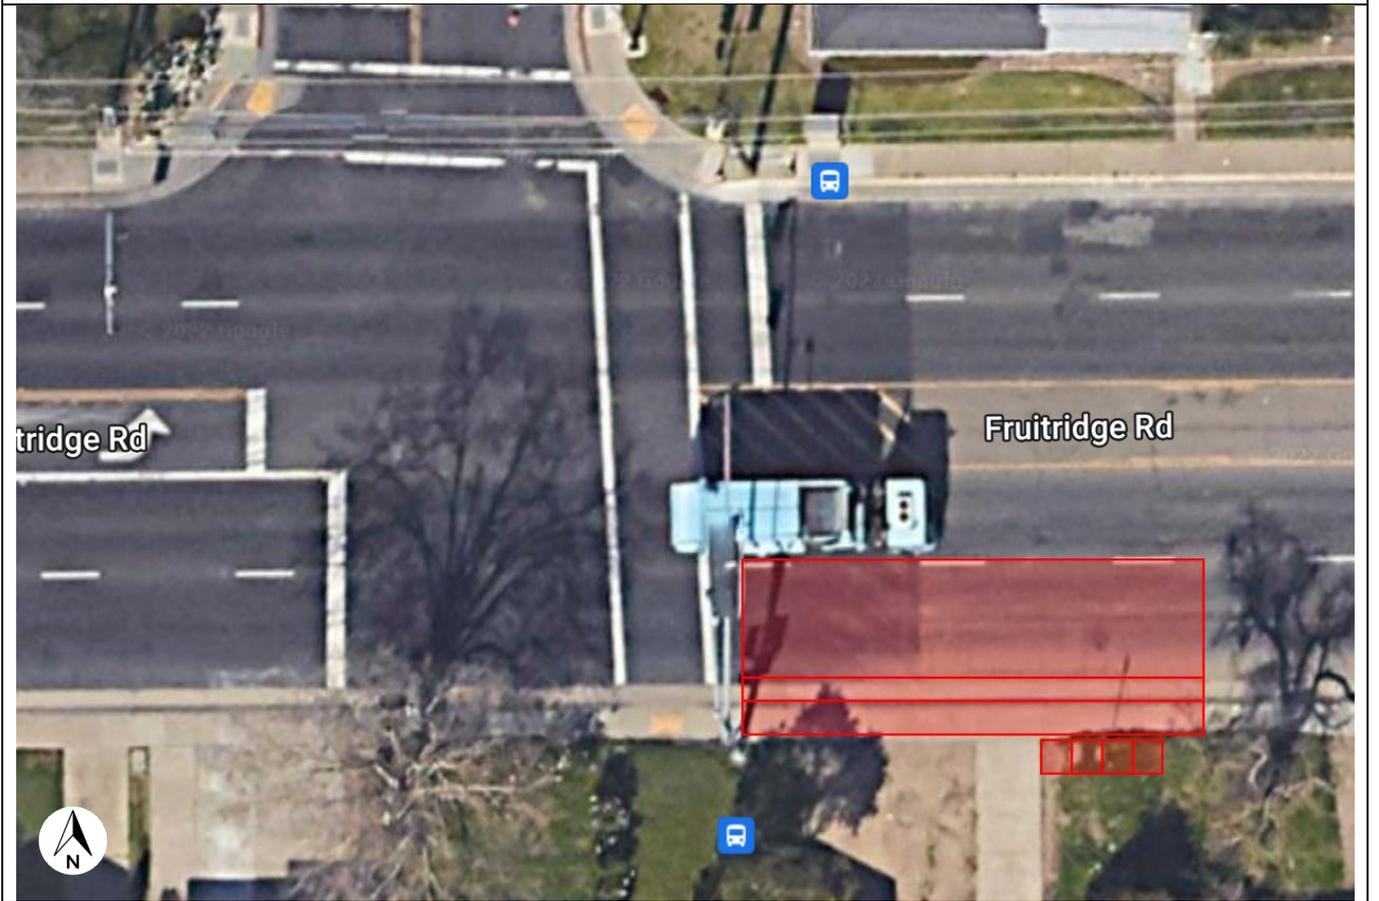


WB Fruitridge Rd & 59th St (FS)	Priority: NA	Stop ID: 2211 7 on, 0 off
--	---------------------	-------------------------------------

Relocate stop approx. 50' east
Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
8-foot sidewalk or landing needed, per standard; however, acquisition of necessary space appears infeasible

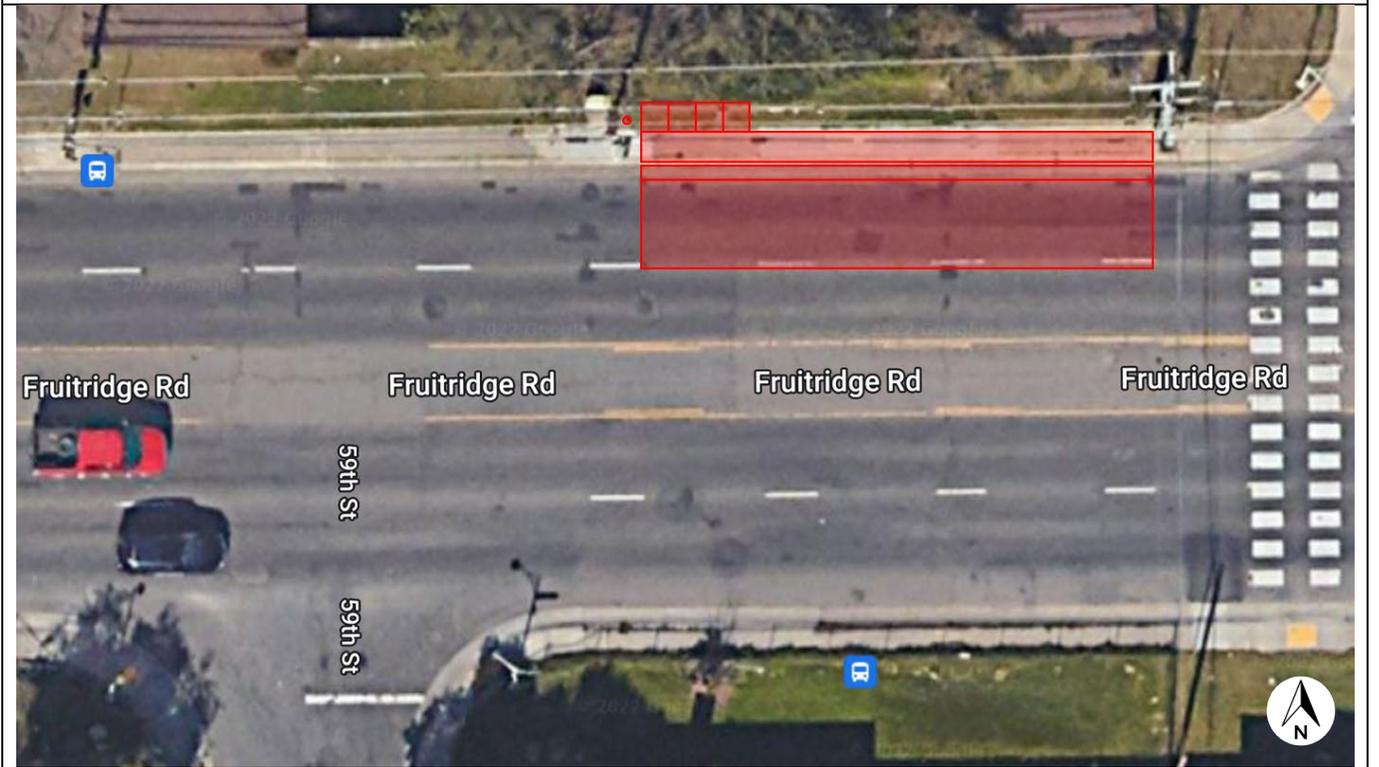


EB Fruitridge Rd & 59th St (FS)	Priority: 3	Stop ID: 2300 1 on, 6 off
Secure ROW at 5605 59 th St (APN 027-0023-001) Construct new 4 x 16' concrete pad behind sidewalk Replace 3 x 100' rolled curb/gutter w/ new vertical curb/gutter Repave 16 x 100' area adjacent to new curb/gutter Rebuild 4 x 100' level sidewalk		

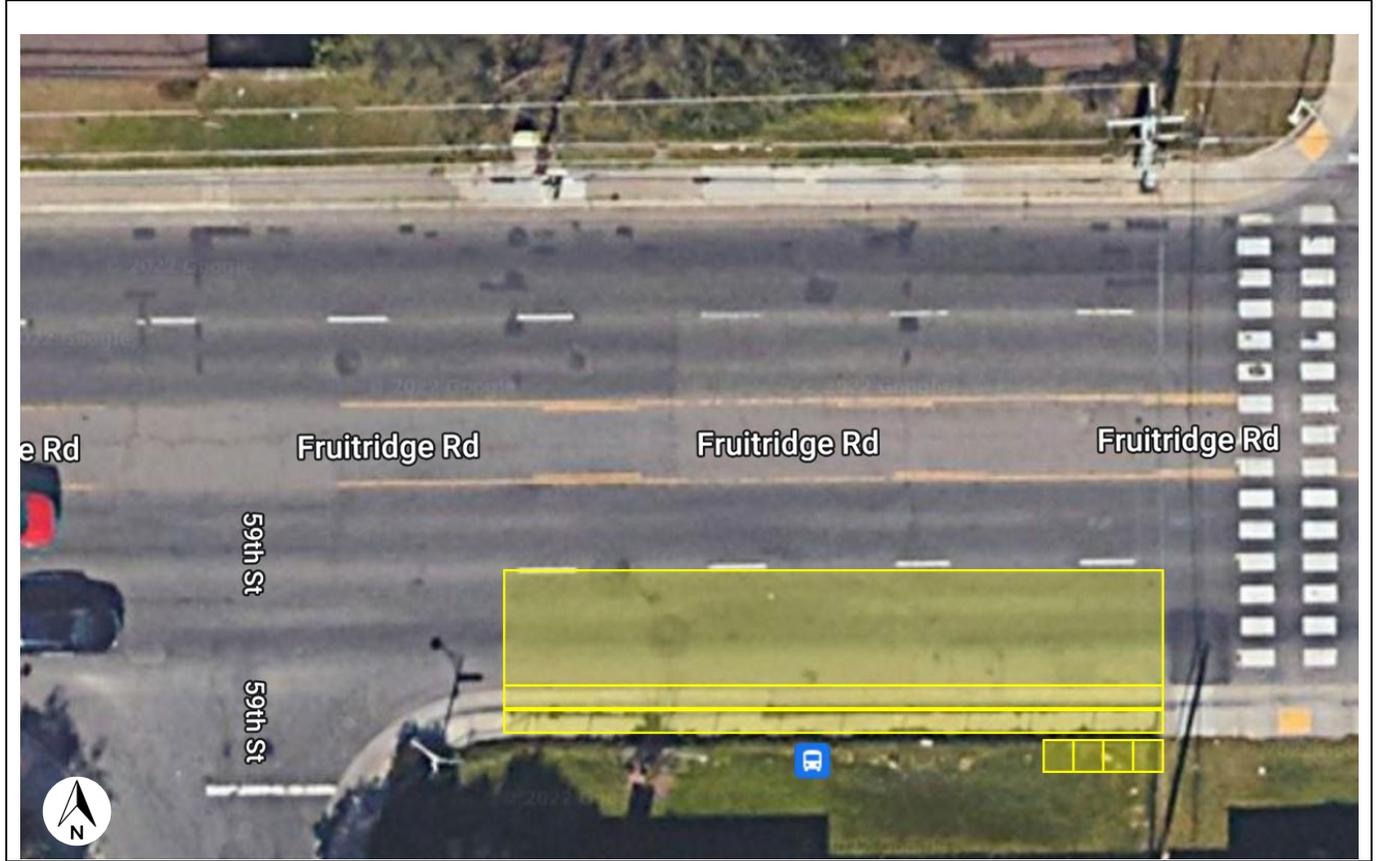


WB Fruitridge Rd & Argo Way (FS)	Priority: 3	Stop ID: 2210 2 on, 1 off
---	--------------------	-------------------------------------

Secure ROW at 5506 Argo Way (APN 023-0242-014)
Construct new 4 x 16' concrete pad behind sidewalk with retaining walls
Replace 3 x 100' rolled curb/gutter w/ new vertical curb/gutter
Repave 12 x 100' area adjacent to new curb/gutter
Rebuild 5 x 100' level sidewalk
Relocate existing pole and sign

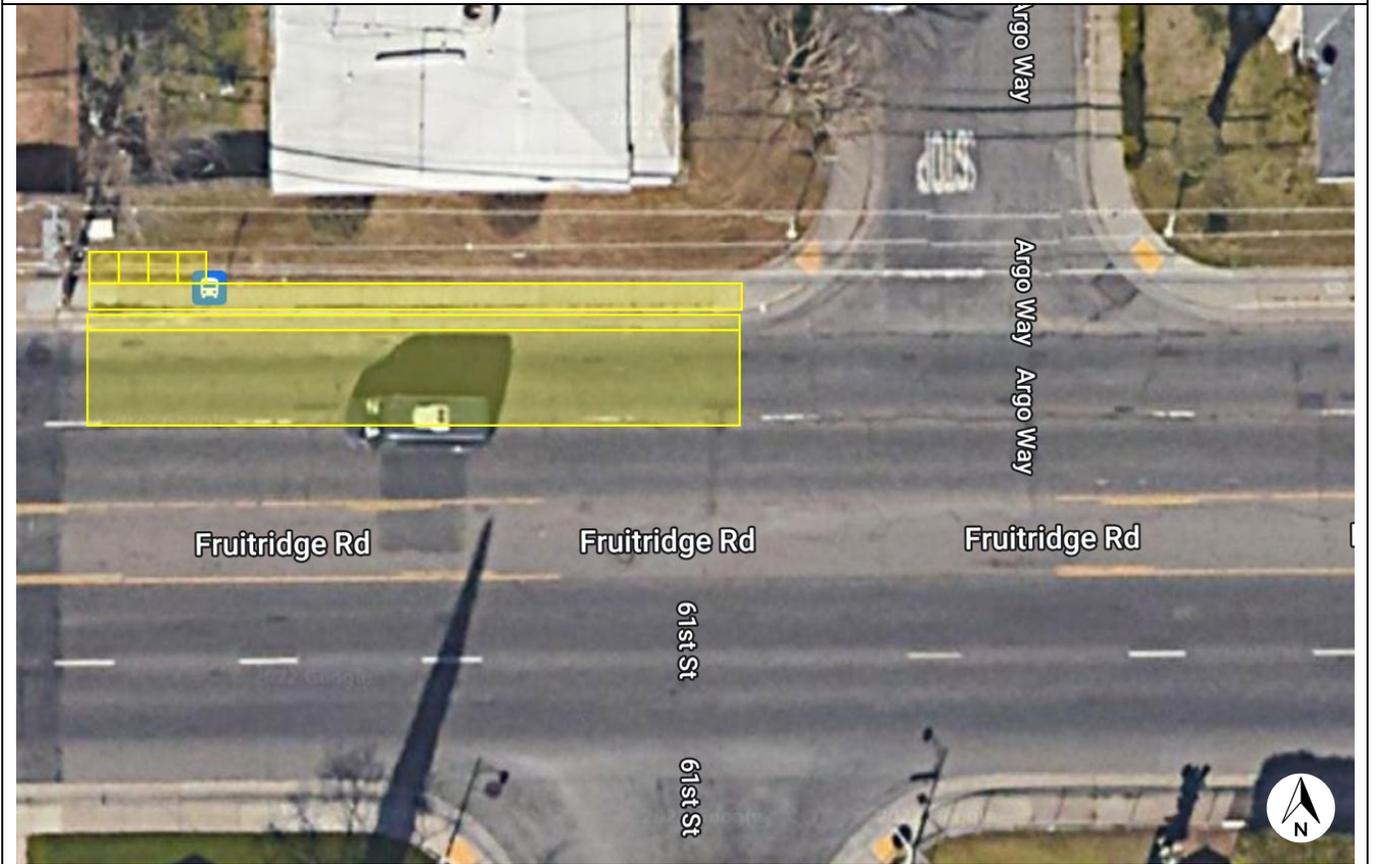


EB Fruitridge Rd & 62nd St (FS)	Priority: NA	Stop ID: 2301 4 on, 6 off
--	---------------------	--

Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
8-foot sidewalk or landing needed, per standard; however, acquisition of necessary space appears infeasible

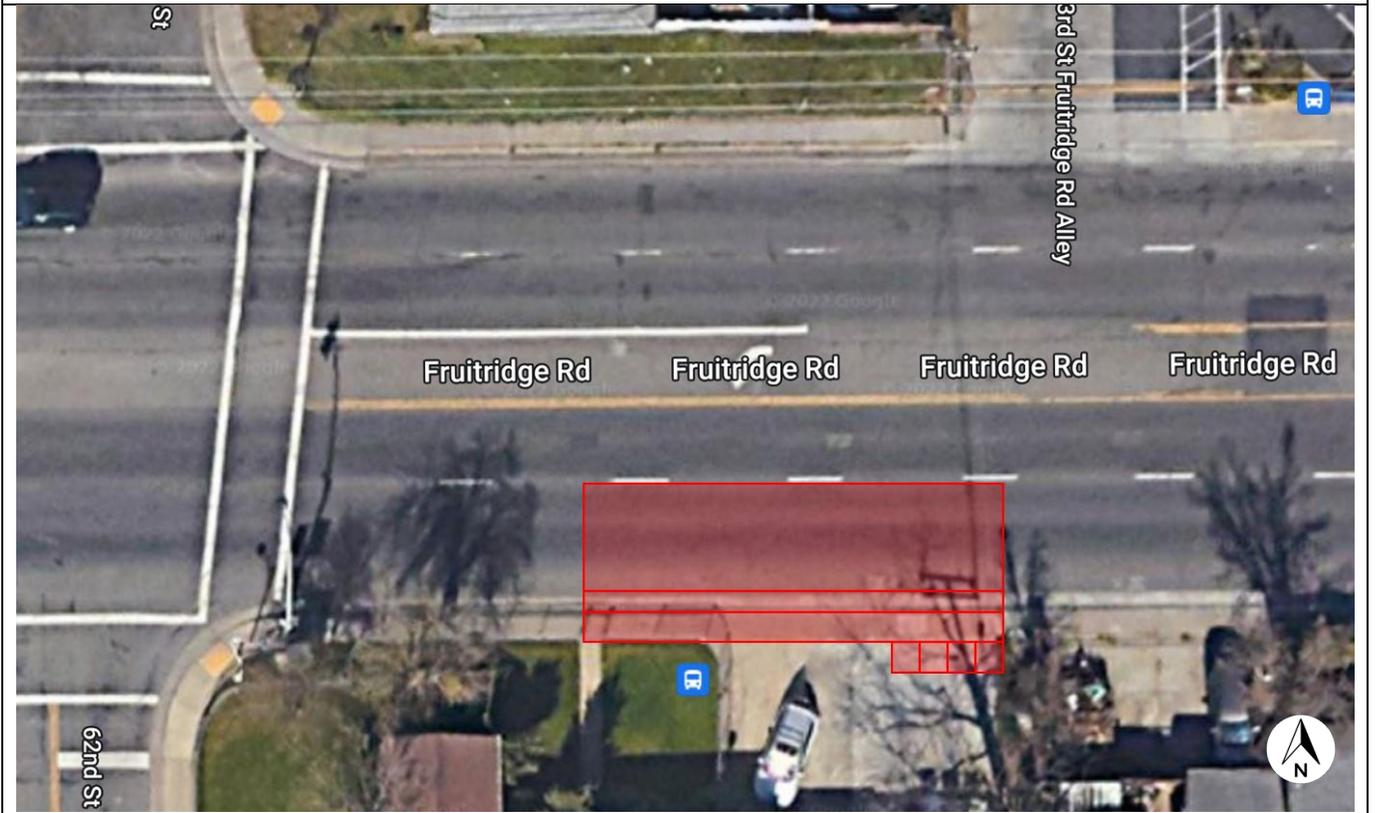

WB Fruitridge Rd & 62nd St	Priority: 3	Stop ID: 2209 7 on, 3 off
---------------------------------------	--------------------	--

Secure ROW at 6231 Fruitridge Rd (APN 023-0246-009)
Construct new 4 x 16' concrete pad behind sidewalk
Replace 3 x 100' rolled curb/gutter w/ new vertical curb/gutter
Repave 12 x 100' area adjacent to new curb/gutter
Rebuild 5 x 100' level sidewalk

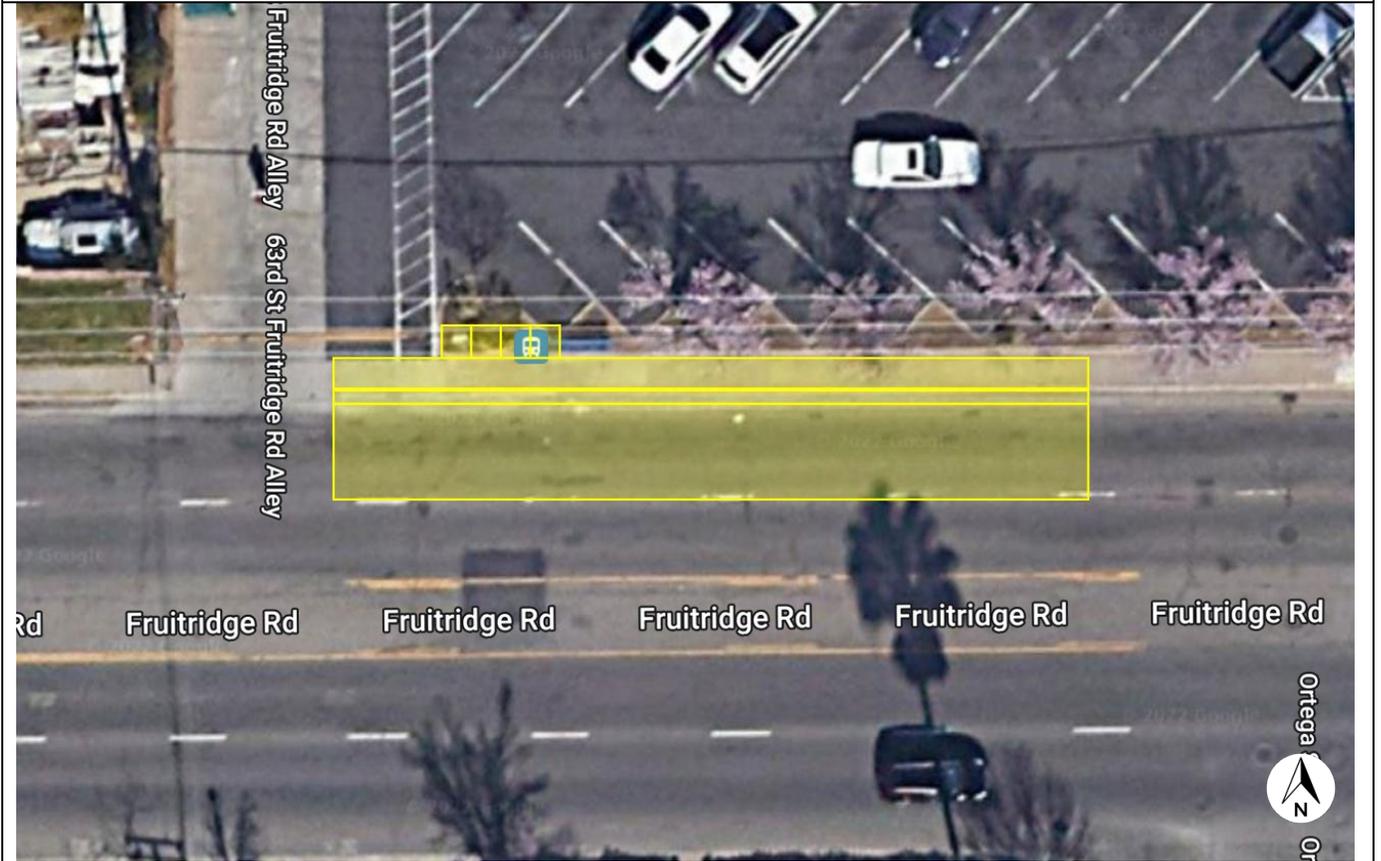


WB Fruitridge Rd & 64th St (NS)	Priority: NA	Stop ID: 2208 1 on, 0 off
--	---------------------	-------------------------------------


Remove stop



EB Fruitridge Rd & 64th St (NS)	Priority: NA	Stop ID: 23023 on, 6 off
--	---------------------	-------------------------------------


Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
8-foot sidewalk or landing needed, per standard; however, acquisition of necessary space appears infeasible

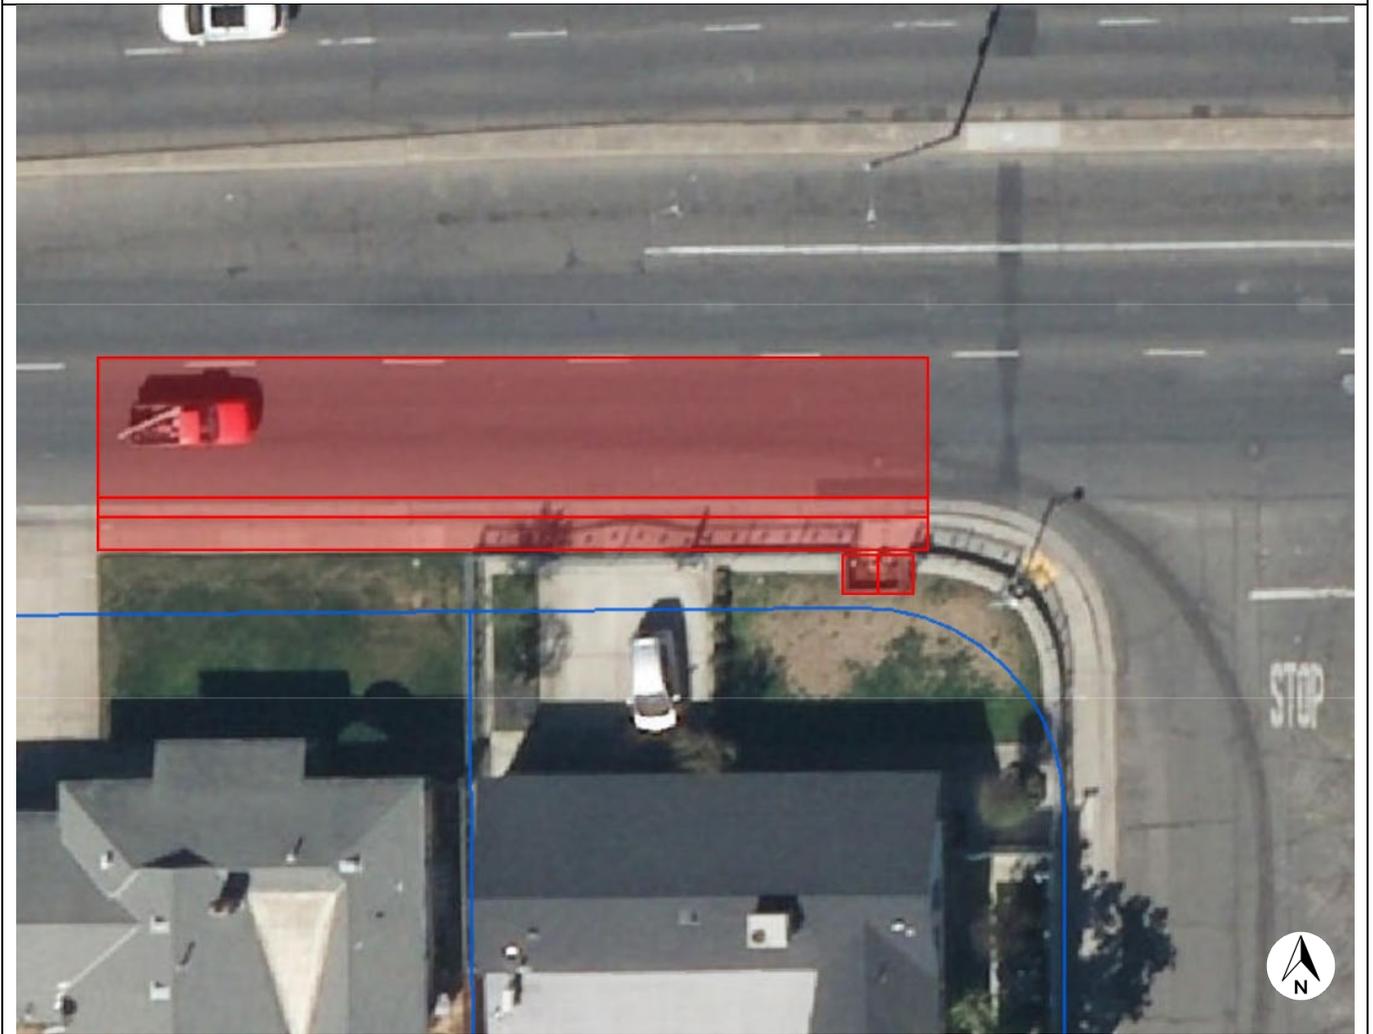

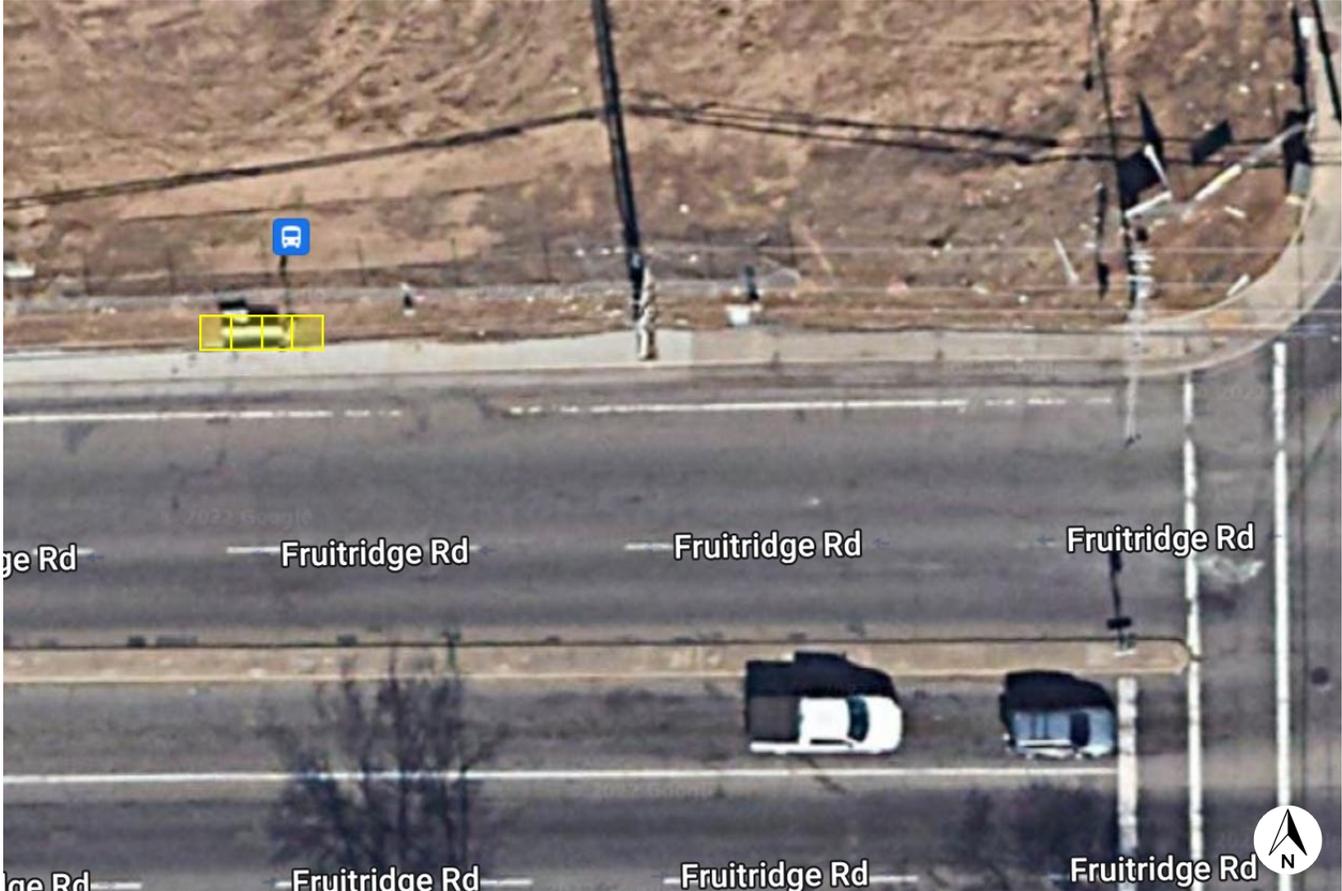
WB Fruitridge Rd & 65th St (FS)	Priority: 6	Stop ID: 2207 24 on, 19 off
Secure ROW at APN 023-0252-018 Construct new 4 x 16' concrete pad behind sidewalk Install 8' shelter and electrical connection		
		

EB Fruitridge Rd & 66th St	Priority: 5	Stop ID: 2304 4 on, 6 off
---------------------------------------	--------------------	--

Construct new 4 x 16' concrete pad in front of sidewalk to curb
Demolish and rebuild sidewalk adjacent to new front door pad at curb height
Demolish and rebuild adjacent sidewalk panels as ramps no more than 1:12 from curb height to sidewalk height

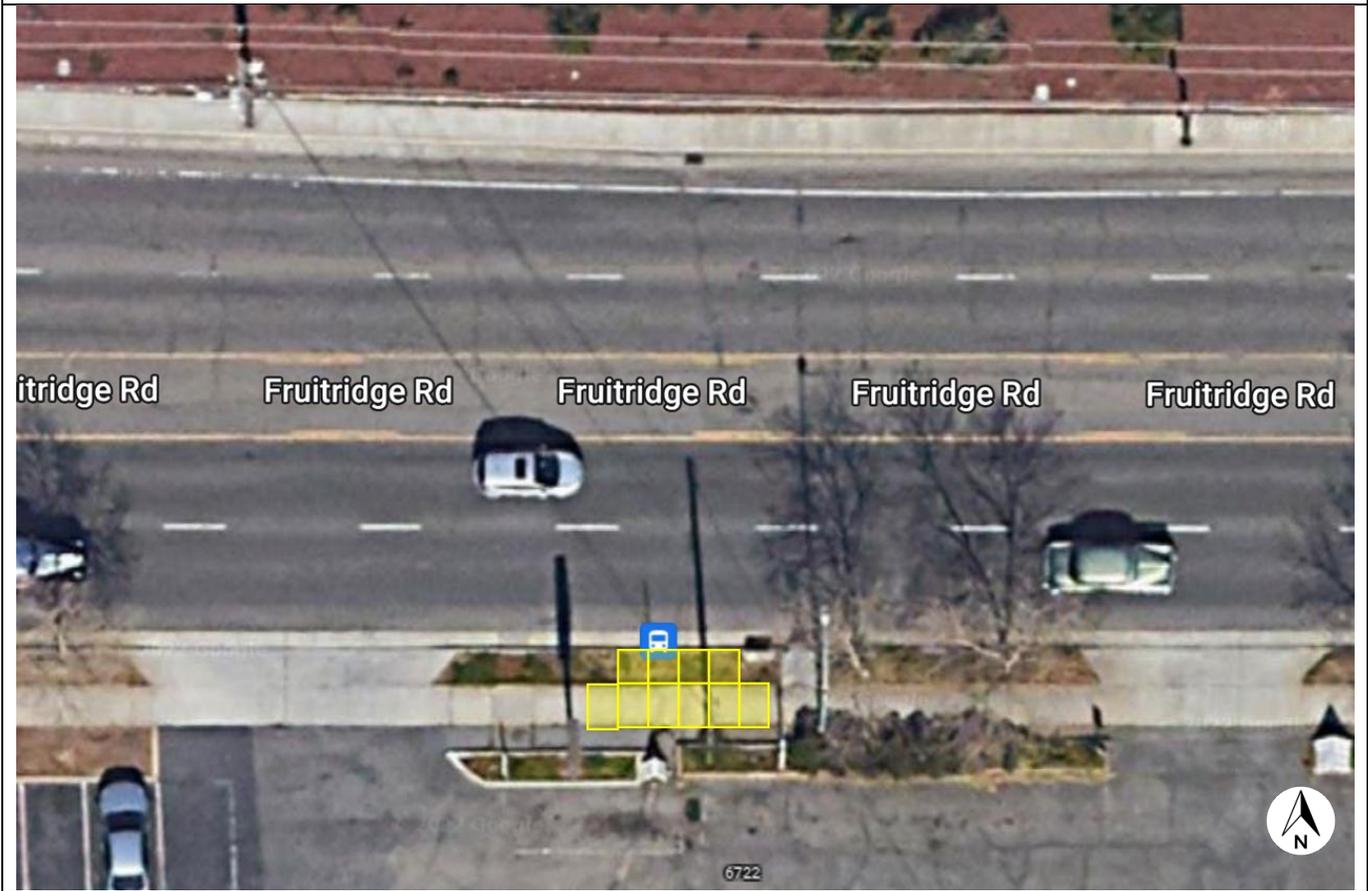

WB Fruitridge Rd & Alcott Dr (MB)	Priority: 4	Stop ID: 2200 4 on, 6 off
Secure ROW at 6700 21 st Ave (APN 023-0010-032) Construct new 4 x 16' concrete pad behind sidewalk		

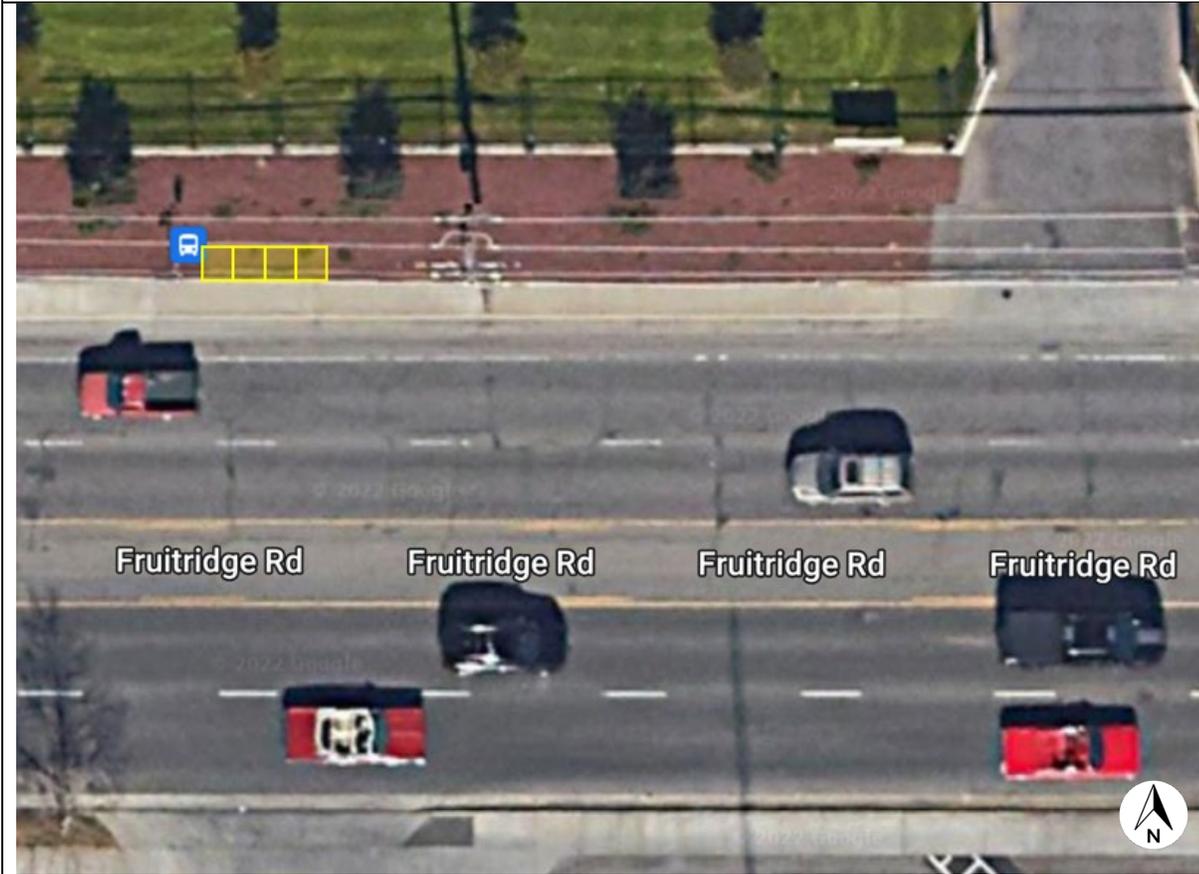


WB Fruitridge Rd & 70th St (NS)	Priority: 6	Stop ID: 2206 4 on, 0 off
--	--------------------	--

Relocate stop approx. 100' west
Secure ROW at 6901 Fruitridge Rd (APN 023-0262-015)
Construct new 4 x 16' concrete pad behind sidewalk
Replace 3 x 60' rolled curb/gutter w/ new vertical curb/gutter
Repace 14 x 60' area adjacent to new curb/gutter
Rebuild 5 x 60' level sidewalk
Relocate existing sign and pole




WB Fruitridge Rd & Emerson Rd (FS)	Priority: 3	Stop ID: 2205 10 on, 1 off
---	--------------------	---

Secure ROW at 5550 Emerson Rd (APN 023-0264-014)
Construct new 4 x 16' concrete pad behind sidewalk
Replace 3 x 60' rolled curb/gutter w/ new vertical curb/gutter
Repave 13 x 60' area adjacent to new curb/gutter
Rebuild 4 x 60' concrete sidewalk
Relocate existing sign and pole

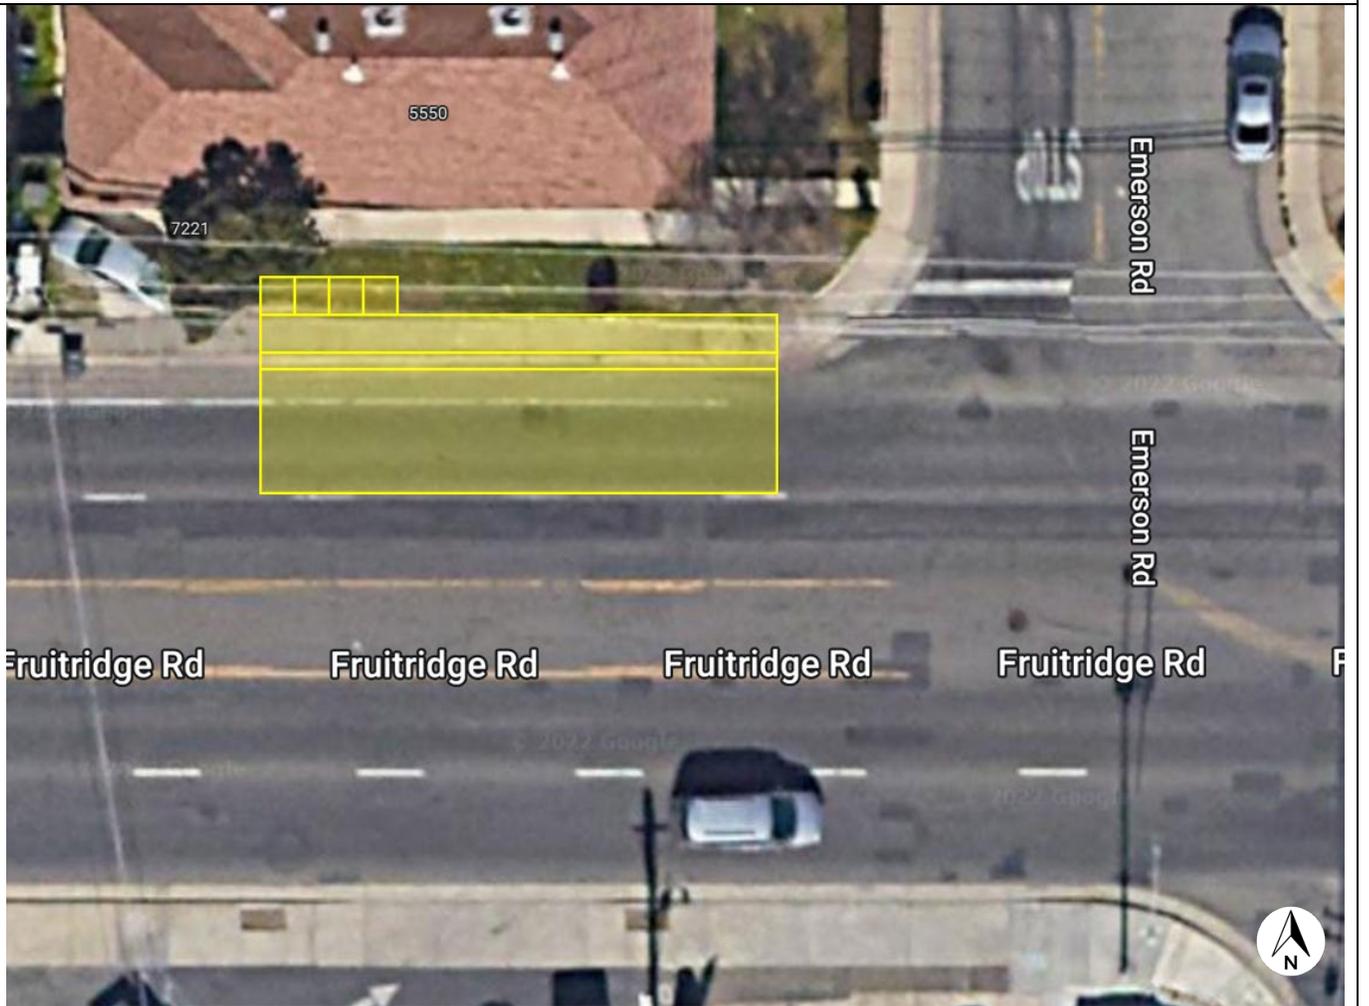

EB Fruitridge Rd & Belleview Ave (FS)	Priority: NA	Stop ID: 2306 5 on, 1 off
--	---------------------	-------------------------------------

Remove stop

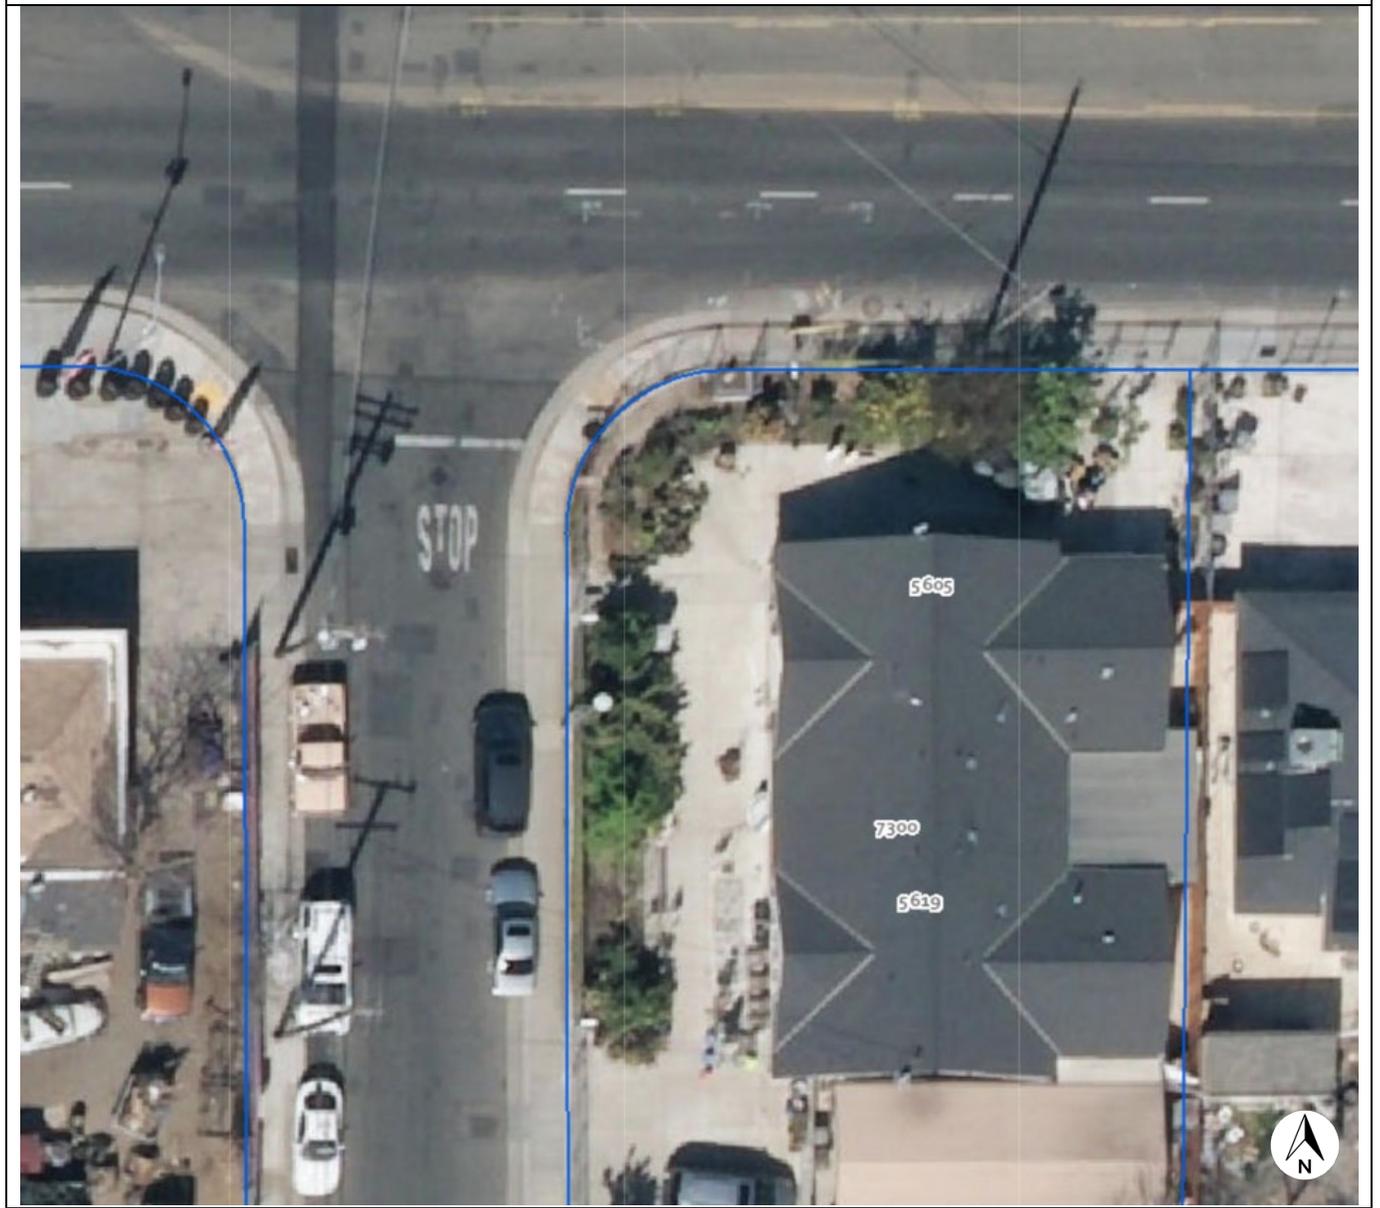

EB Fruitridge Rd & Wallace Ave (NS)	Priority: 4	Stop ID: 2307 1 on, 3 off
Secure ROW at 7440 Fruitridge Rd (APN 027-0061-004) Construct new 4 x 16' concrete pad behind sidewalk		
		


WB Fruitridge Rd & Lowell St (FS)	Priority: 2	Stop ID: 2204 1 on, 10 off
--	--------------------	---

Replace 3 x 100' rolled curb/gutter w/ new vertical curb/gutter
Repave 13 x 100' area adjacent to new curb/gutter
Rebuild 5 x 100' level sidewalk




EB Fruitridge Rd & Wilkinson St (NS)	Priority: 3	Stop ID: 2308 4 on, 20 off
---	--------------------	--------------------------------------

Secure ROW at 7600 Fruitridge Rd (APN 027-0062-022)
Construct new 4 x 16' concrete pad behind sidewalk
Replace 3 x 90' rolled curb/gutter w/ new vertical curb/gutter
Repave 14 x 90' area adjacent to new curb/gutter
Rebuild 5 x 90' level sidewalk
Rebuild fencing
Install new bench

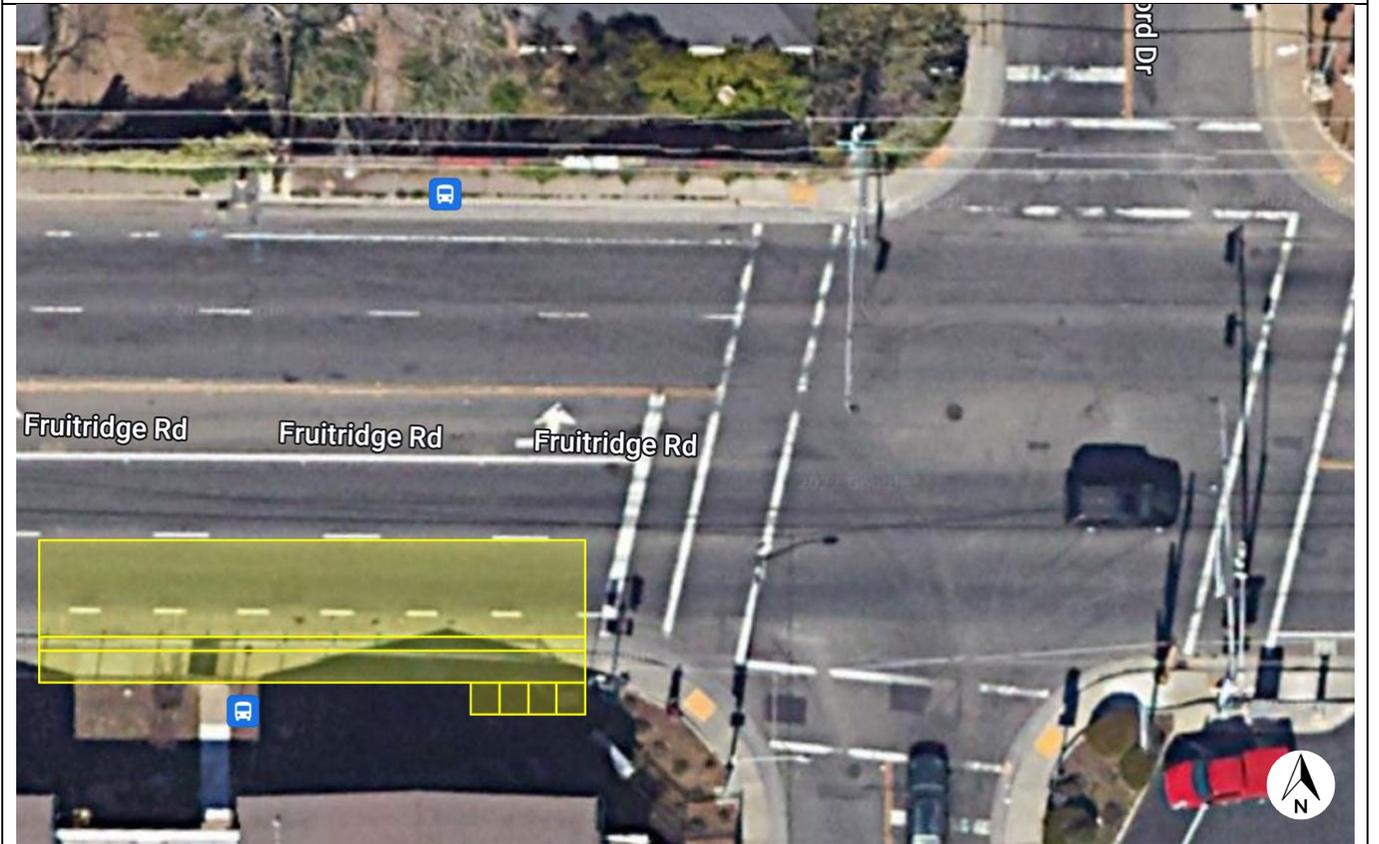


WB Fruitridge Rd & Bradford Dr (FS)	Priority: NA	Stop ID: 2203 13 on, 1 off
--	---------------------	---

Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
8-foot sidewalk or landing needed, per standard; however, acquisition of necessary space appears infeasible

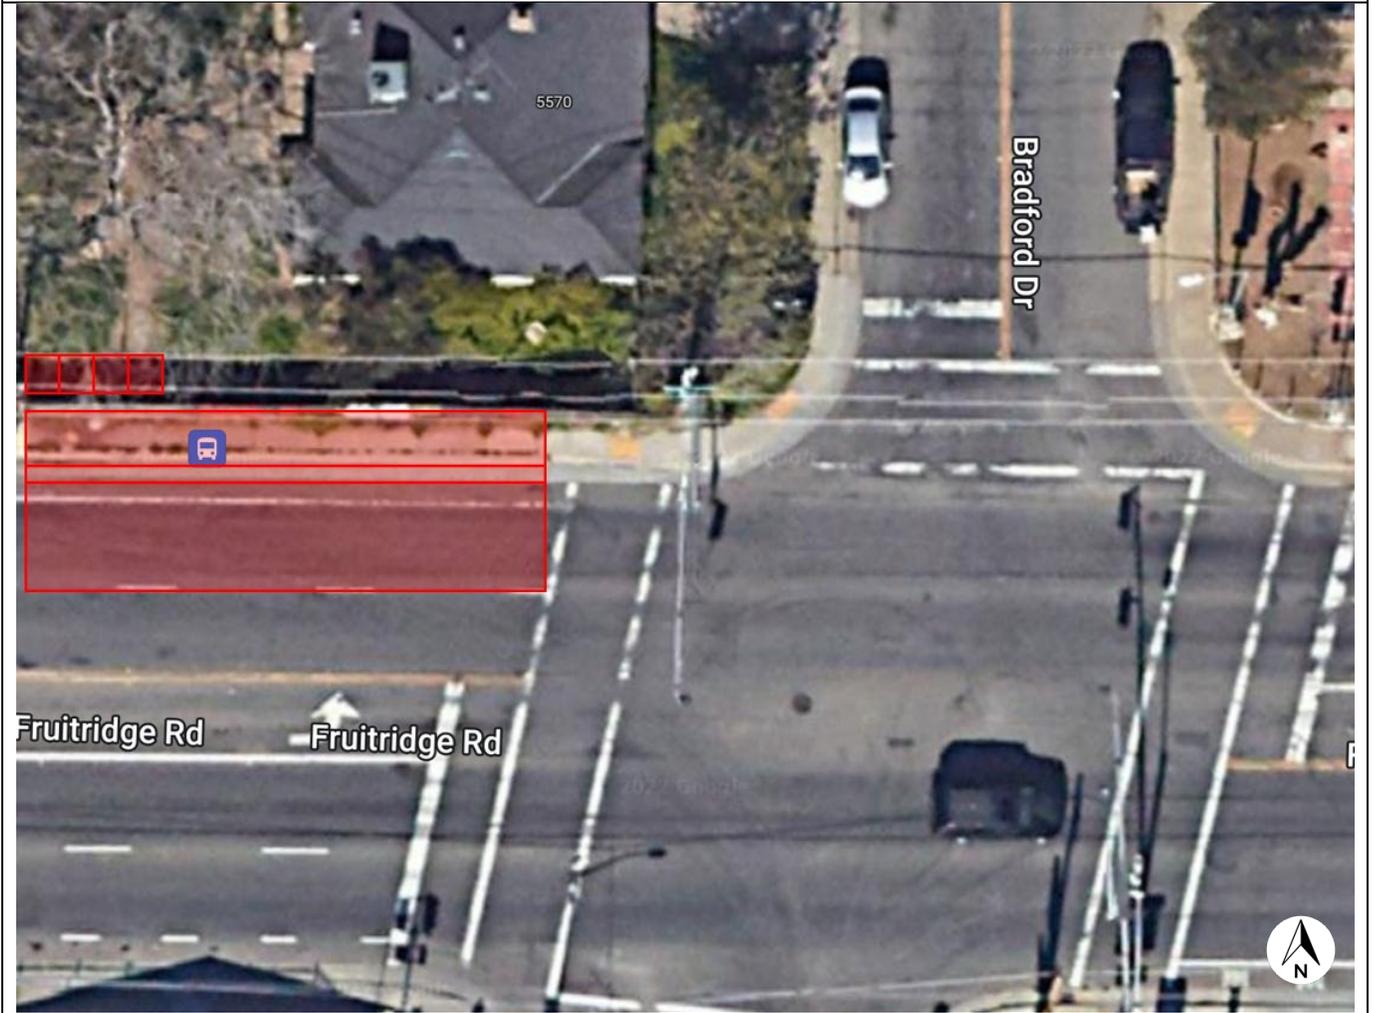


WB Fruitridge Rd & 79th St (FS)	Priority: NA	Stop ID: 2202 10 on, 1 off
--	---------------------	---

Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost
8-foot sidewalk or landing needed, per standard; however, acquisition of necessary space appears infeasible

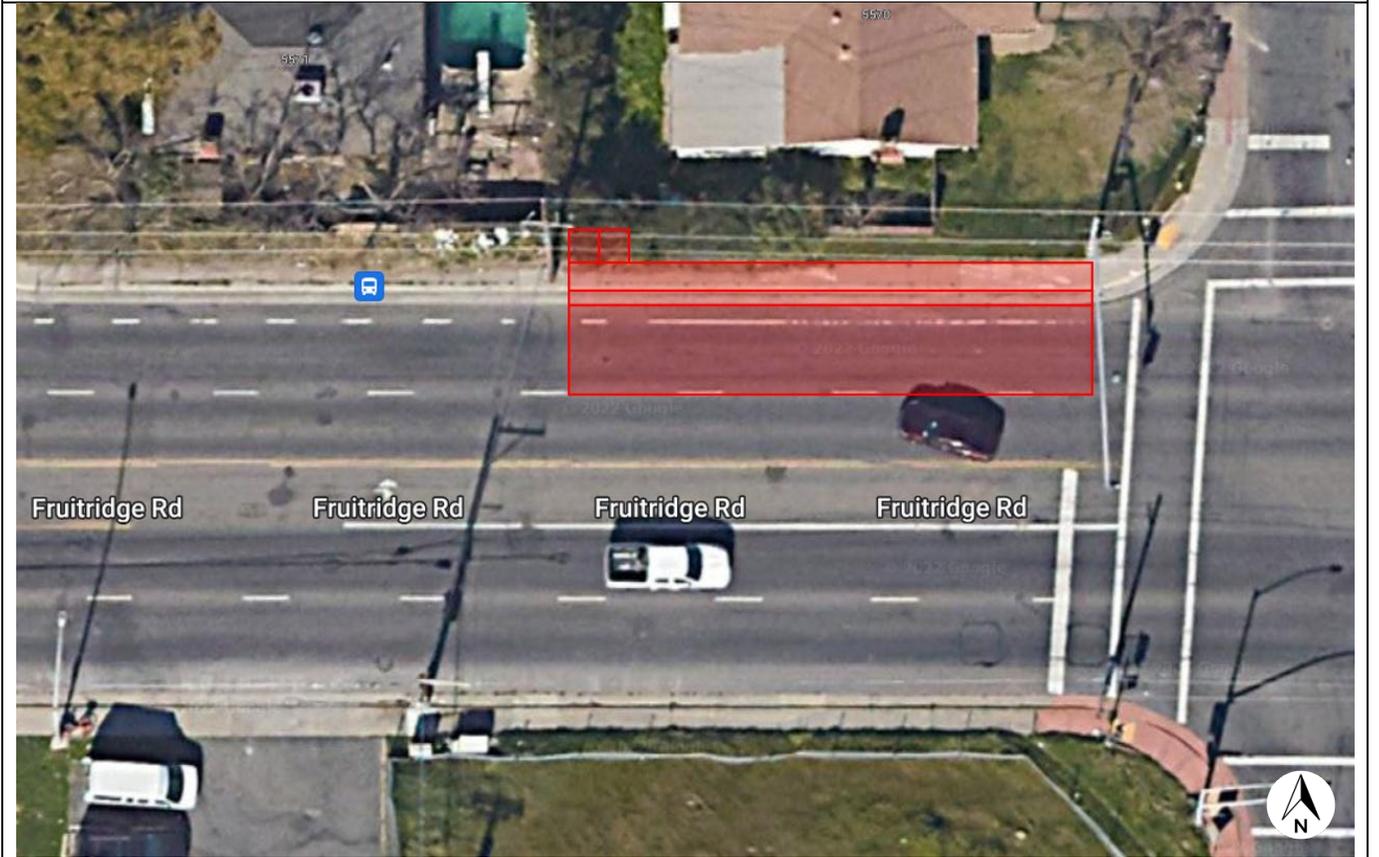

EB Fruitridge Rd & 79th St (NS)	Priority: 1	Stop ID: 2309 11 on, 42 off
Secure ROW at 5600 79 th St (APN 027-0071-013) Construct new 4 x 16' concrete pad behind sidewalk Replace 3 x 100' rolled curb/gutter w/ new vertical curb/gutter Repave 14 x 100' area adjacent to new curb/gutter Rebuild 4 x 100' level sidewalk Install new bench		

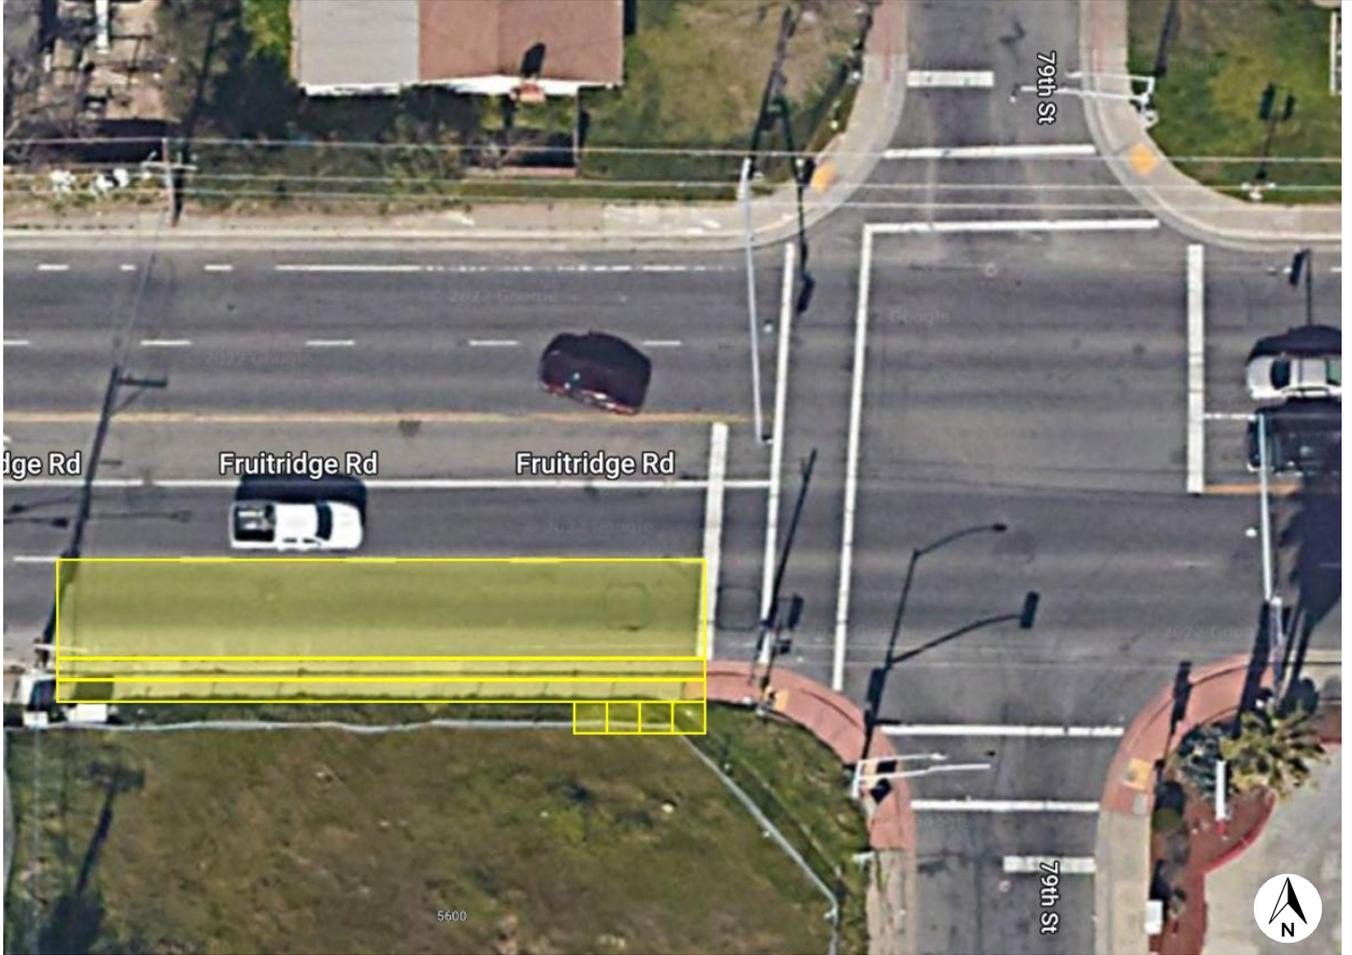

SB Power Inn Rd & Fruitridge Rd (FS)	Priority: 6	Stop ID: 1999 X on, X off
---	--------------------	--

Secure ROW at 8020 Fruitridge Rd (APN 027-0081-039)
Construct new 4 x 16' concrete pad behind sidewalk
Install new pole and sign
Install new 8' transit shelter and electrical connection




Corridor #46

65th St


Folsom Blvd to Sky Pkwy

Jurisdiction:

City of Sacramento

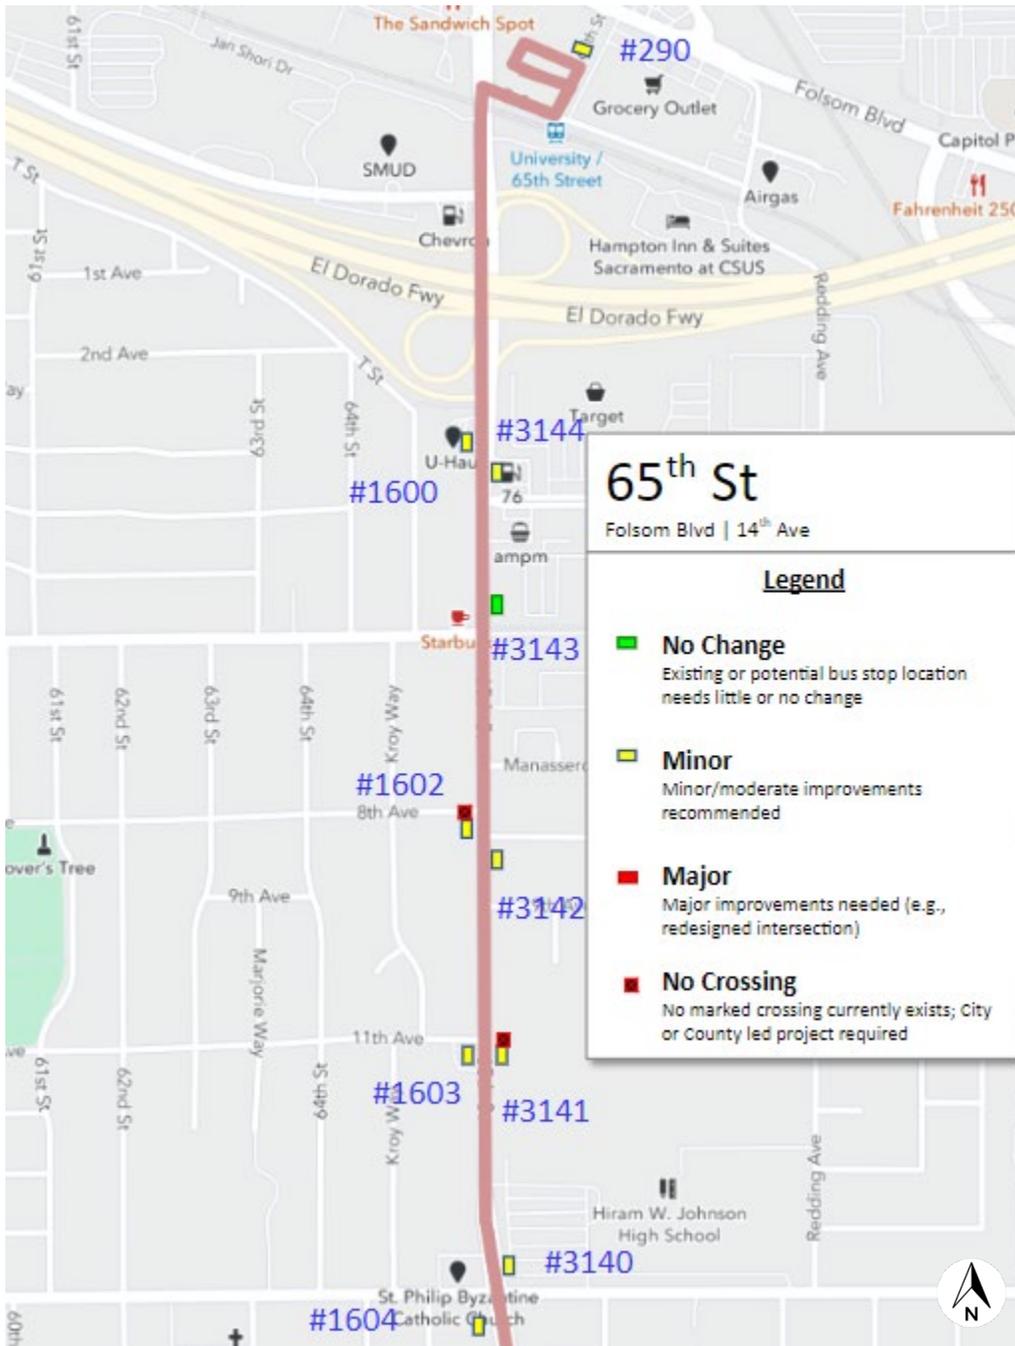



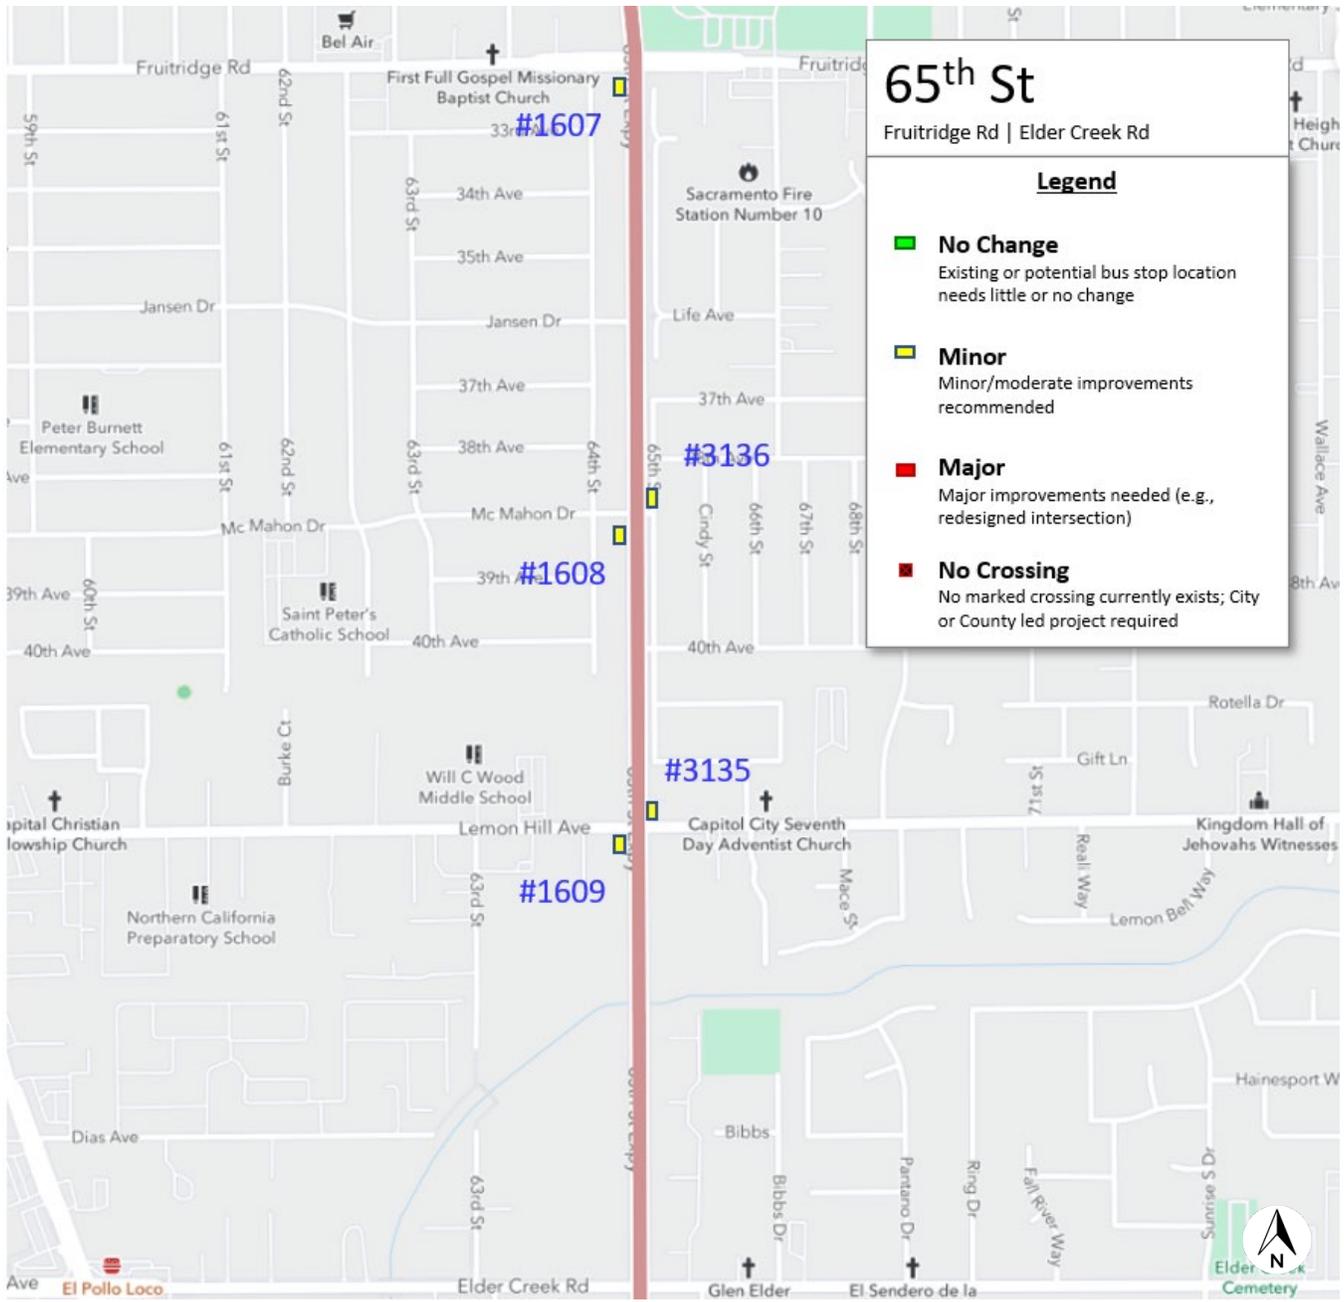




Corridor Length:
3.75 miles

Number of Stops:
 6 – No Changes Needed
 19 – Minor/Moderate Changes Recommended
 1 – Major Changes Needed – Not Currently Feasible
 2 – crossings needed

Total Cost:


\$463,000	Design, project approvals
\$723,000	Construction
\$1,186,000	Total

Corridor Priority: 3.4

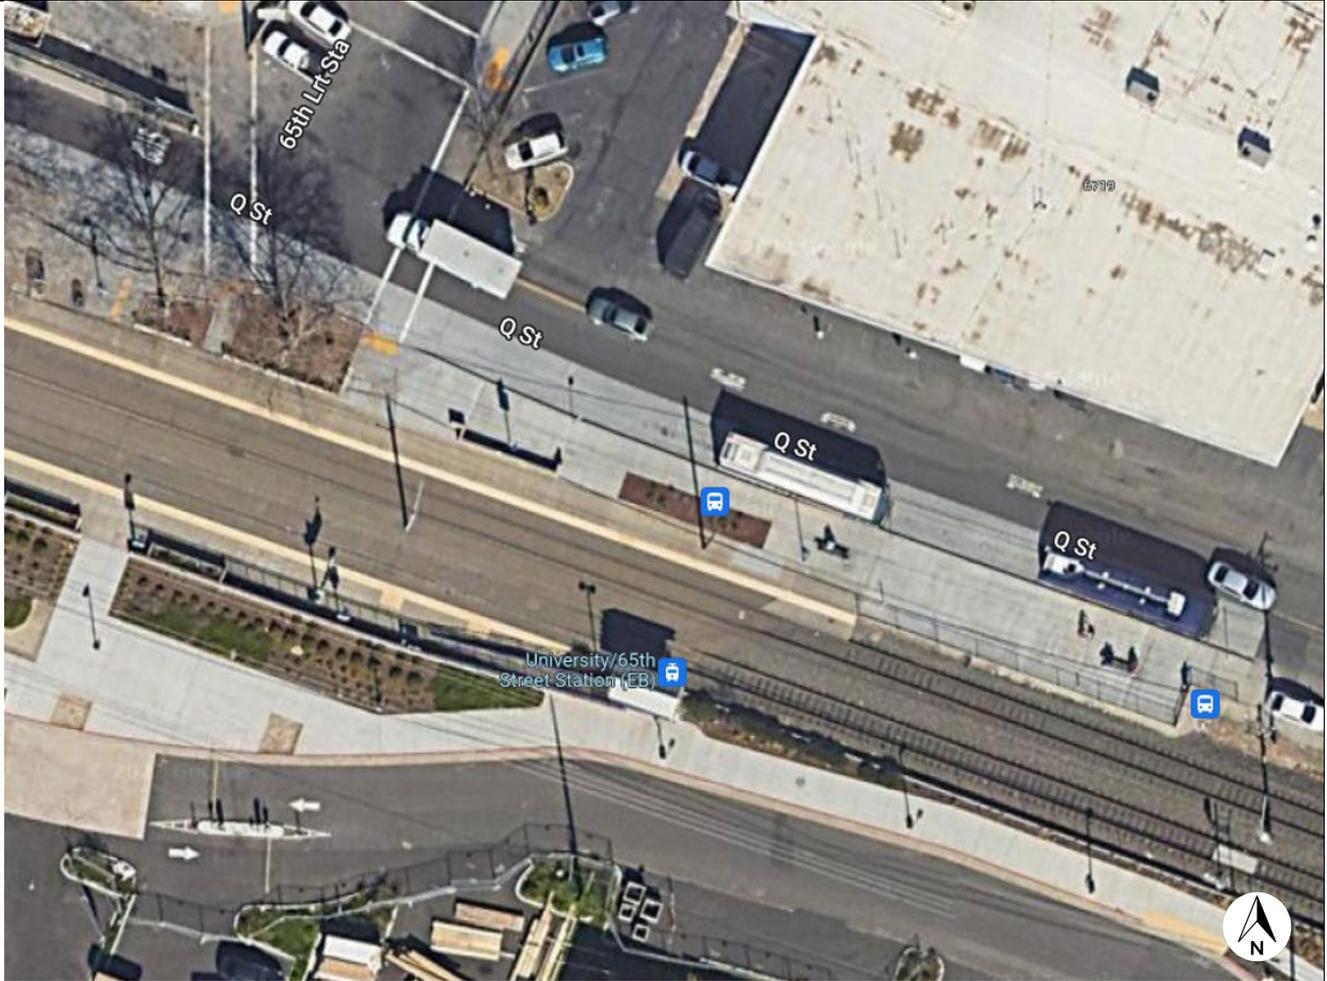WB University/65th Lrt & Bay 4	Priority: 3	Stop ID: 290 381 on, 373 off
Install new 16' shelter and electrical connection Install new digital sign		
		


SB 65th St & 4th Ave (FS)	Priority: 2	Stop ID: 1600 X on, Y off
--------------------------------------	--------------------	--

Secure ROW at 2738 65th St (APN 011-0293-024)
Construct 4 x 32' concrete pad behind sidewalk
Install pedestrian scale lighting

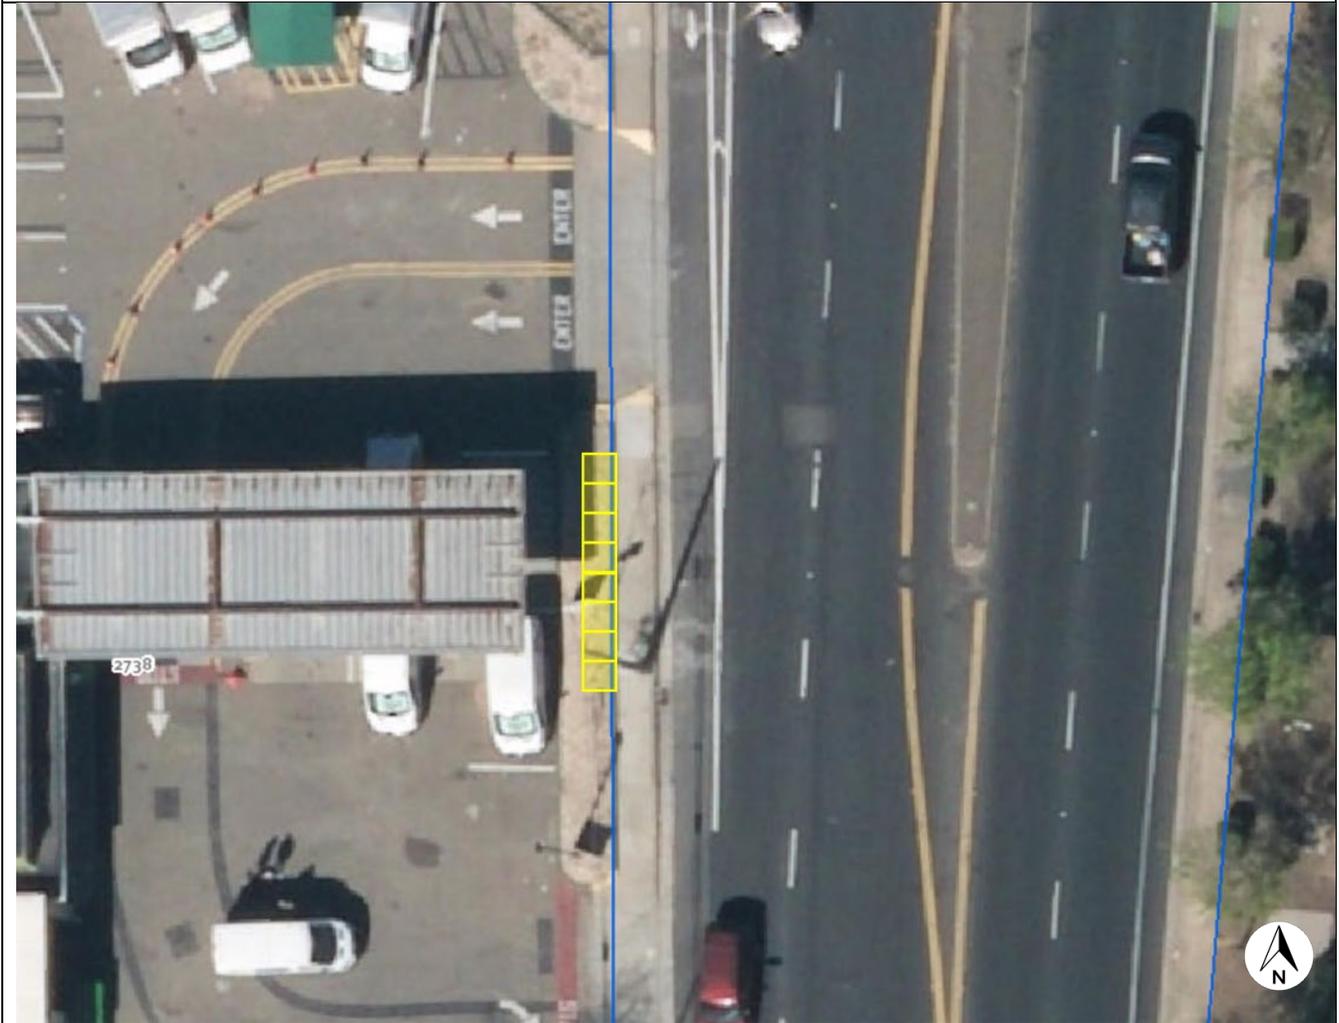


NB 65th St & 4th Ave (FS)	Priority: 2	Stop ID: 3144 3 on, 17 off
--------------------------------------	--------------------	---

Secure ROW at 2901 65th St (APN 015-0031-043)
Construct 4x16 concrete pad behind sidewalk
Relocate existing pole and sign
Install pedestrian scale lighting

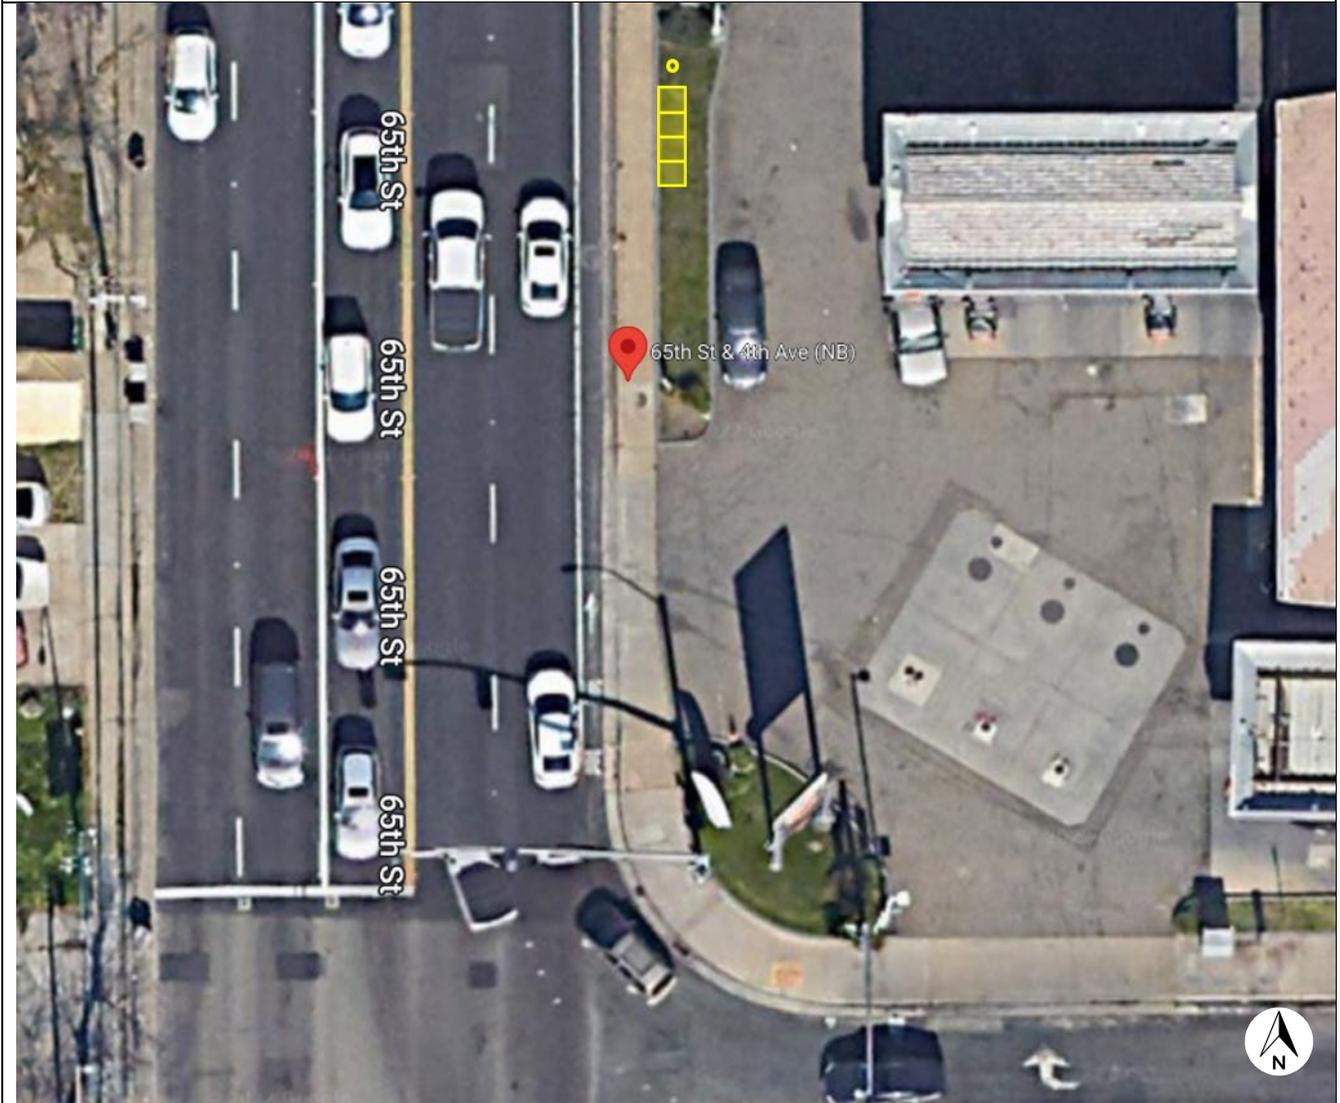


SB 65th St & 8th Ave (FS)	Priority: 1	Stop ID: 1602 15 on, 2 off
<p>Secure ROW at 3300 65th St (APN 015-0166-001) Construct 4 x 8' concrete pad behind sidewalk Relocate existing pole and sign Replace 3 x 60' rolled curb/gutter w/ new vertical curb/gutter Repave 13 x 60' area adjacent to new curb/gutter Rebuild 4 x 60' concrete sidewalk Consider new crossing or relocating bus stop (out of scope)</p>		

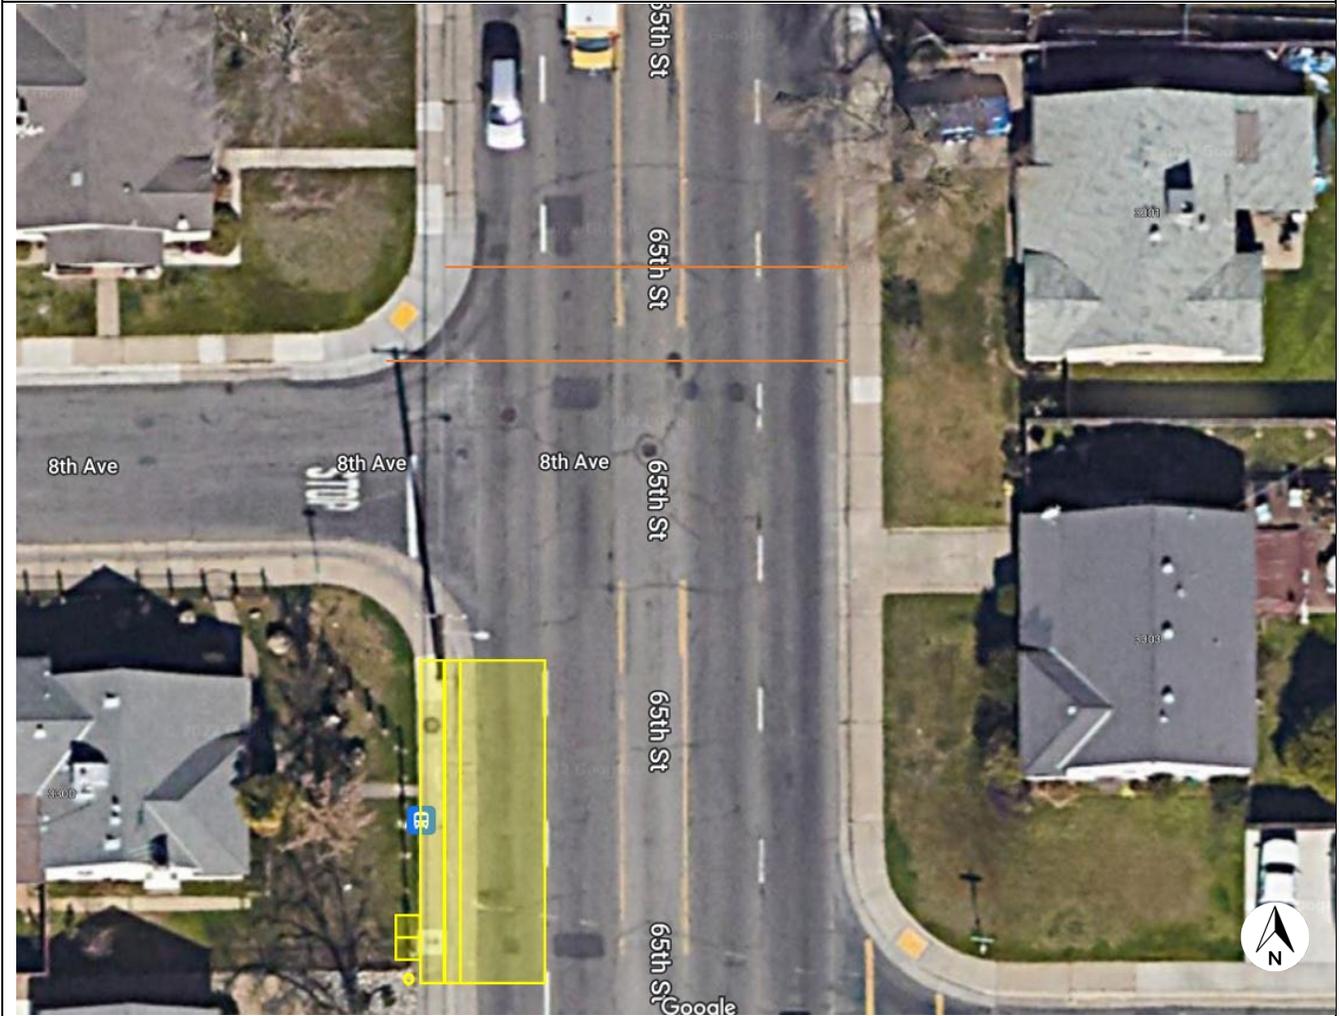


NB 65th St & San Joaquin St	Priority: 1	Stop ID: 3142 1 on, 1 off
--	--------------------	--

Secure ROW at 3335 65th St (APN 015-0172-024)
Construct 4x8 concrete pad behind sidewalk

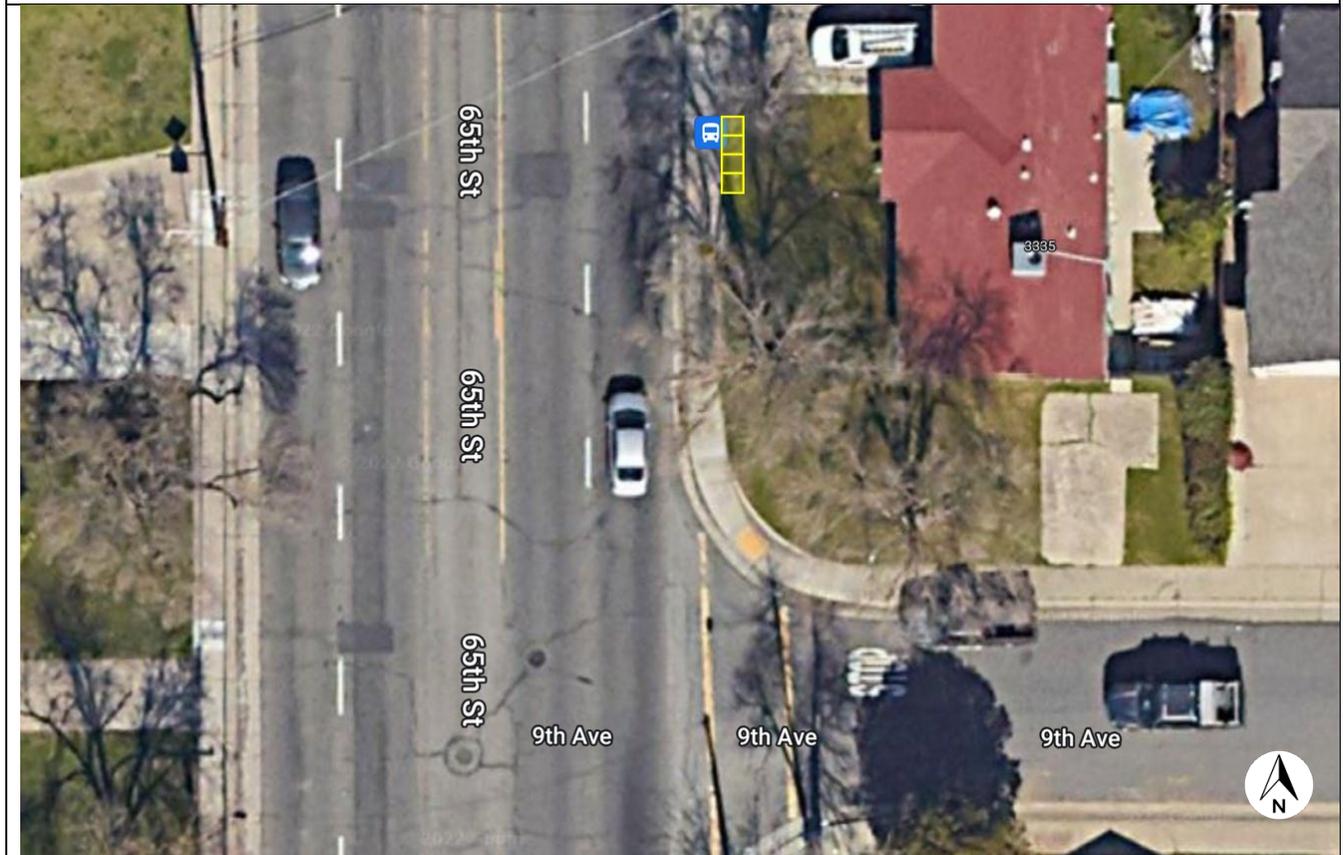


SB 65th St & 11th Ave (FS)	Priority: 2	Stop ID: 1603 15 on, 2 off
Secure ROW at 3602 65 th St (APN 015-0239-004) Construct 4x16 concrete pad behind sidewalk Install pedestrian scale lighting Replace 3 x 70' rolled curb/gutter w/ new vertical curb/gutter Repave 14 x 70' area adjacent to new curb/gutter Rebuild 6 x 70' level sidewalk		

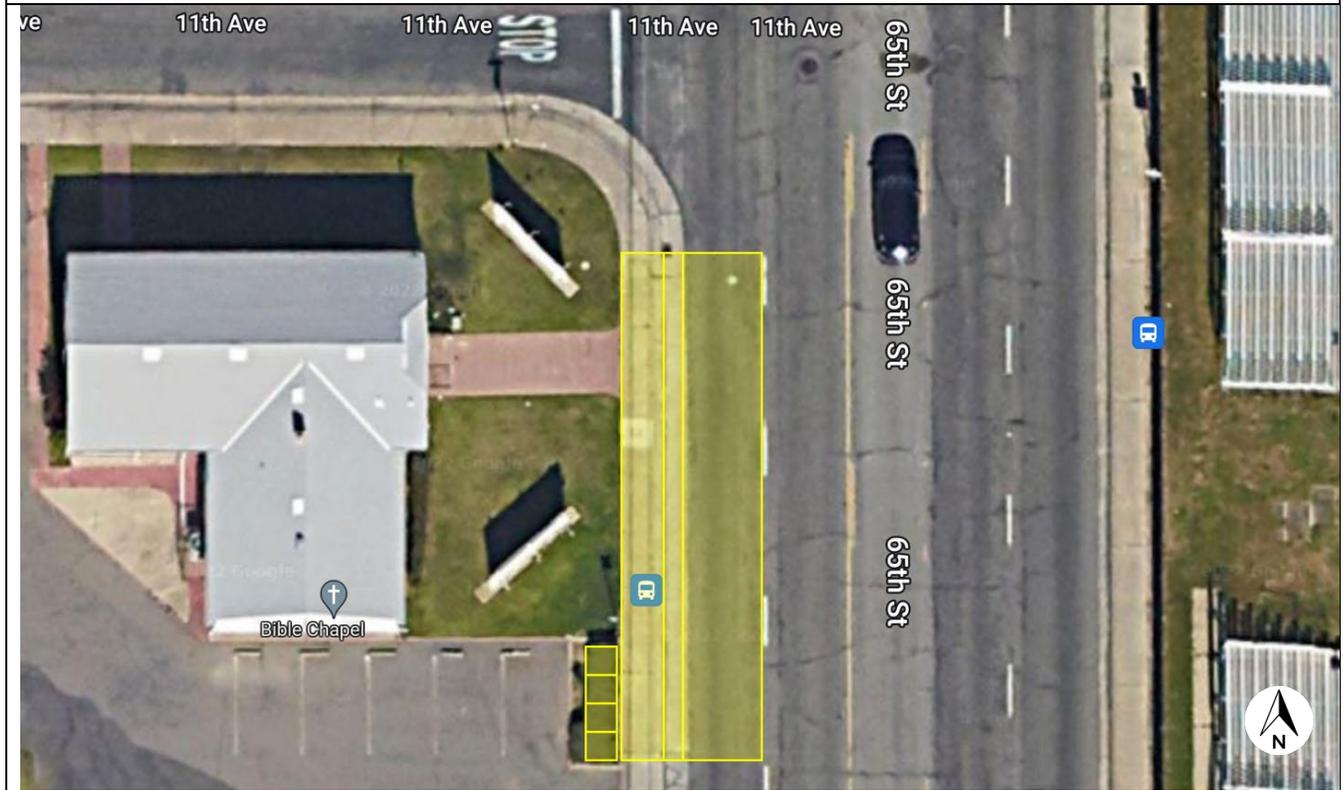

NB 65th St & 11th Ave (FS)	Priority: 1	Stop ID: 3141 1 on, 2 off
---------------------------------------	--------------------	--

Secure ROW at 6879 14th Ave (APN 015-0301-001)
Construct 4 x 16' concrete pad behind sidewalk
Recommend new crossing and two new curb cuts (out of scope)

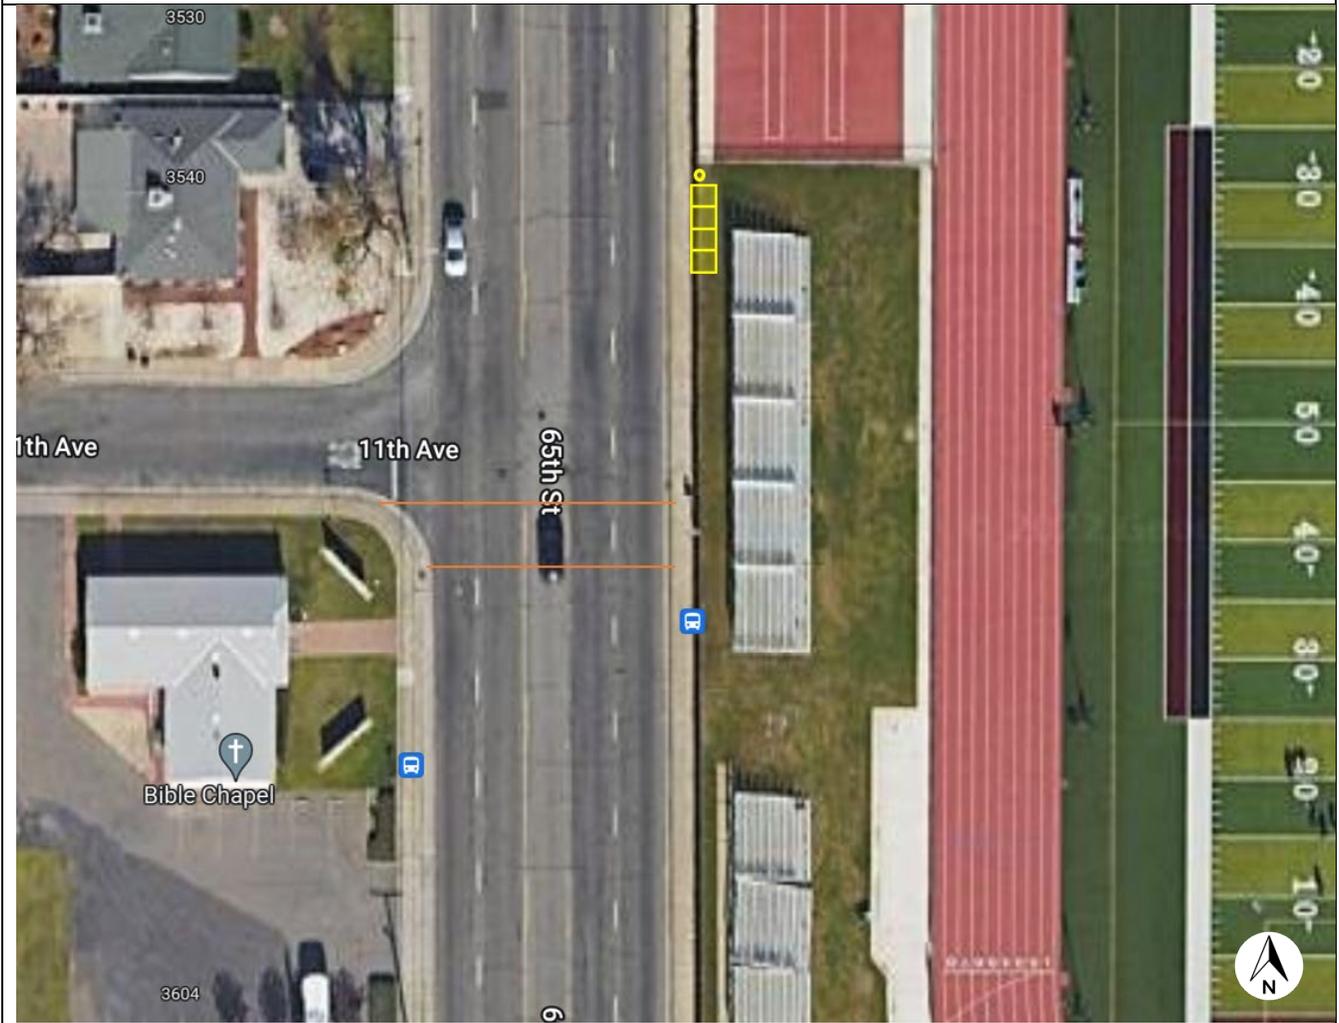

NB 65th St & 14th Ave (FS)	Priority: 1	Stop ID: 3140 57 on, 121 off
---------------------------------------	--------------------	---

Install new trash receptacle
Install additional bench
Install new digital sign



SB 65th St & 14th Ave (FS)	Priority: 4	Stop ID: 1604 104 on, 38 off
Secure ROW at 6540 14 th Ave (APN 021-0074-003) Construct 4 x 32' concrete pad behind sidewalk Rebuild fencing Install new 16' transit shelter and electrical connection Install new trash receptacle		




NB 65th St & 18th Ave (FS)	Priority: 2	Stop ID: 3139 1 on, 3 off
---------------------------------------	--------------------	--

Secure ROW at 4270½ 67th St (APN 021-0164-007)
Construct 4x16 concrete pad behind sidewalk
Rebuild fencing
Install pedestrian scale lighting




SB 65th St & 18th Ave (FS)	Priority: NA	Stop ID: 1605 7 on, 2 off
---------------------------------------	---------------------	--

8-foot sidewalk or landing needed, per standard; however, acquisition of necessary space appears infeasible

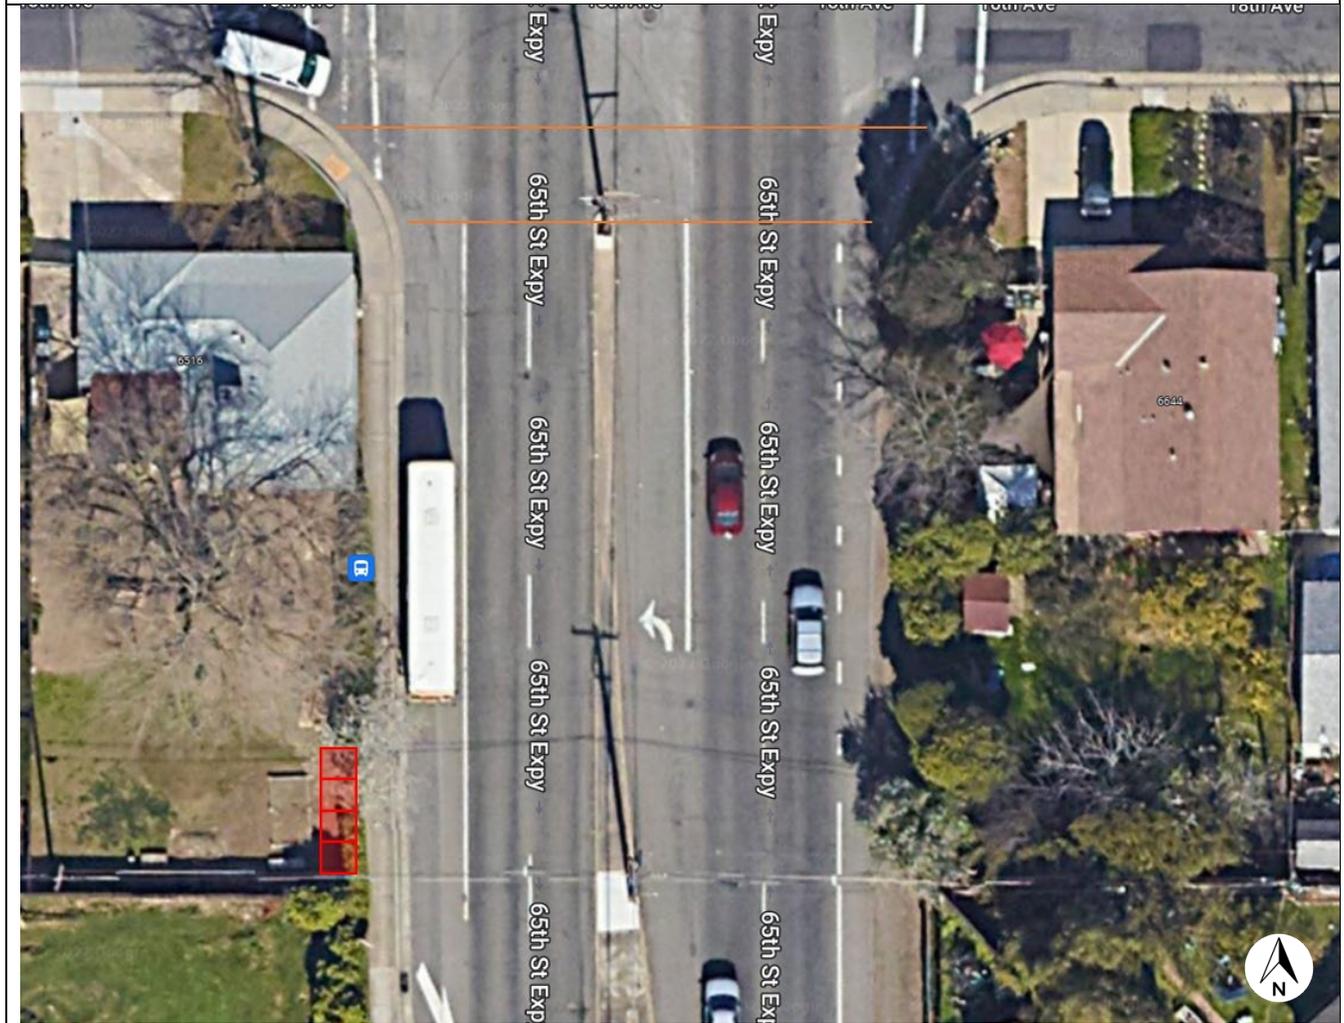


NB 65th St & 21st Ave (FS)	Priority: 2	Stop ID: 3138 11 on, 7 off
---------------------------------------	--------------------	---

Secure ROW at 4756 67th St (APN 021-0370-001)
Construct 2x16 concrete pad behind sidewalk, in front of fencing
Install pedestrian scale lighting

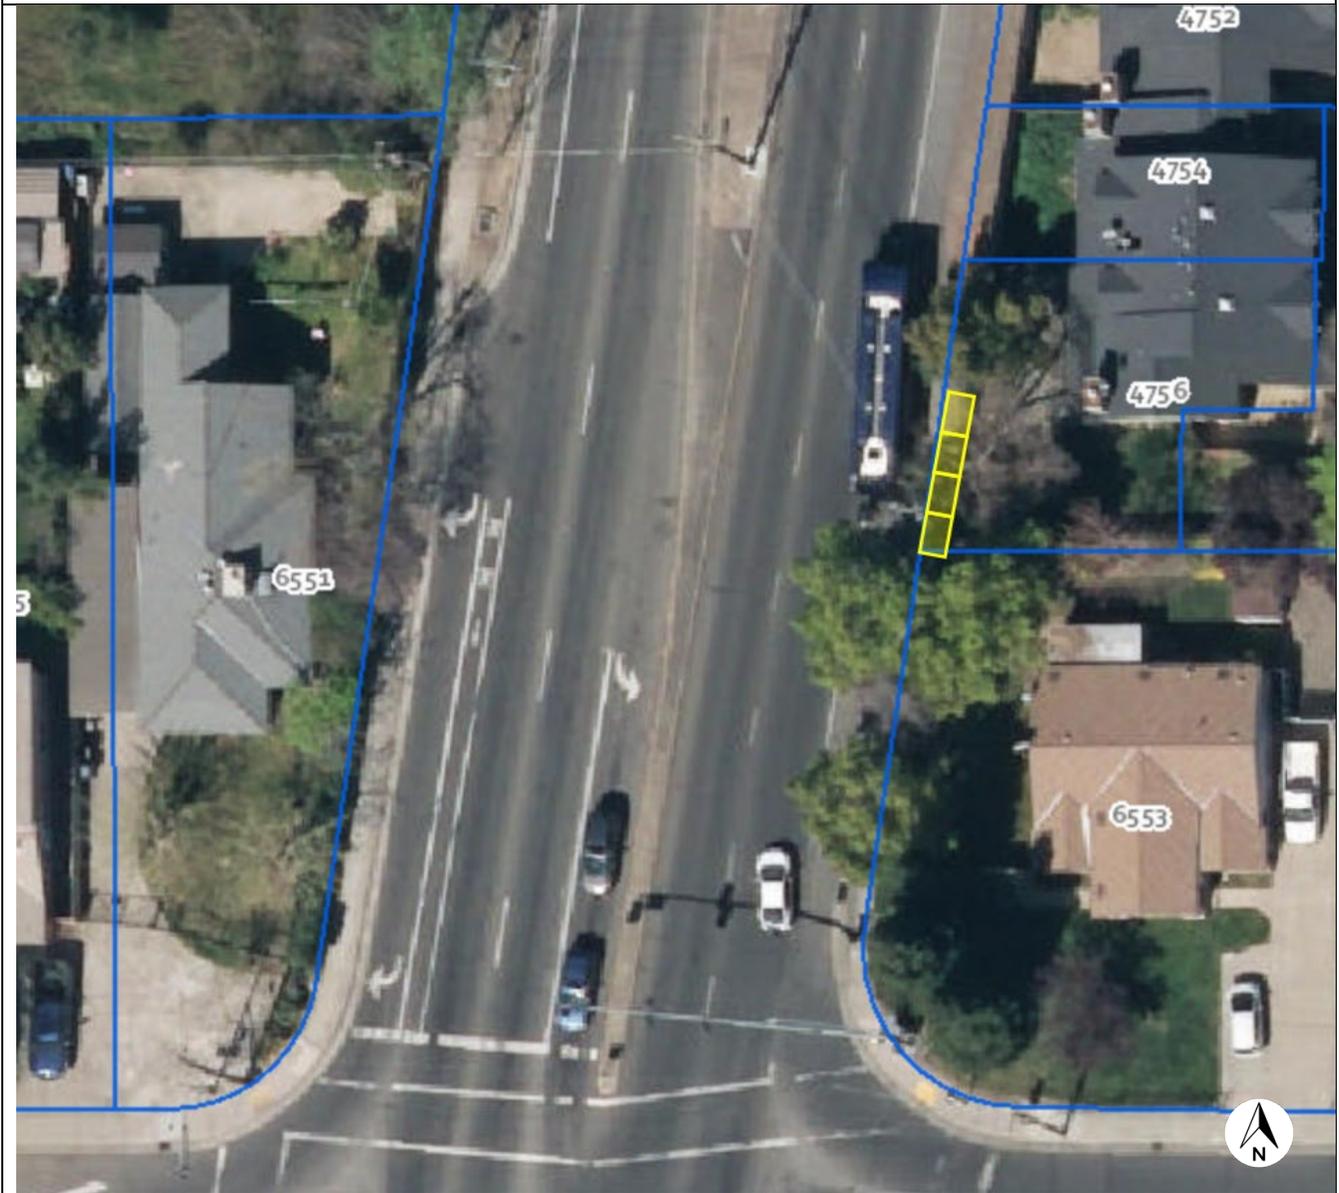


SB 65th St & 21st Ave (FS)	Priority: 2	Stop ID: 1606 5 on, 12 off
---------------------------------------	--------------------	---

Secure ROW at 4831 64th St (APN 023-0062-012)
Construct 4x16 concrete pad behind sidewalk
Replace bench
Rebuild fencing

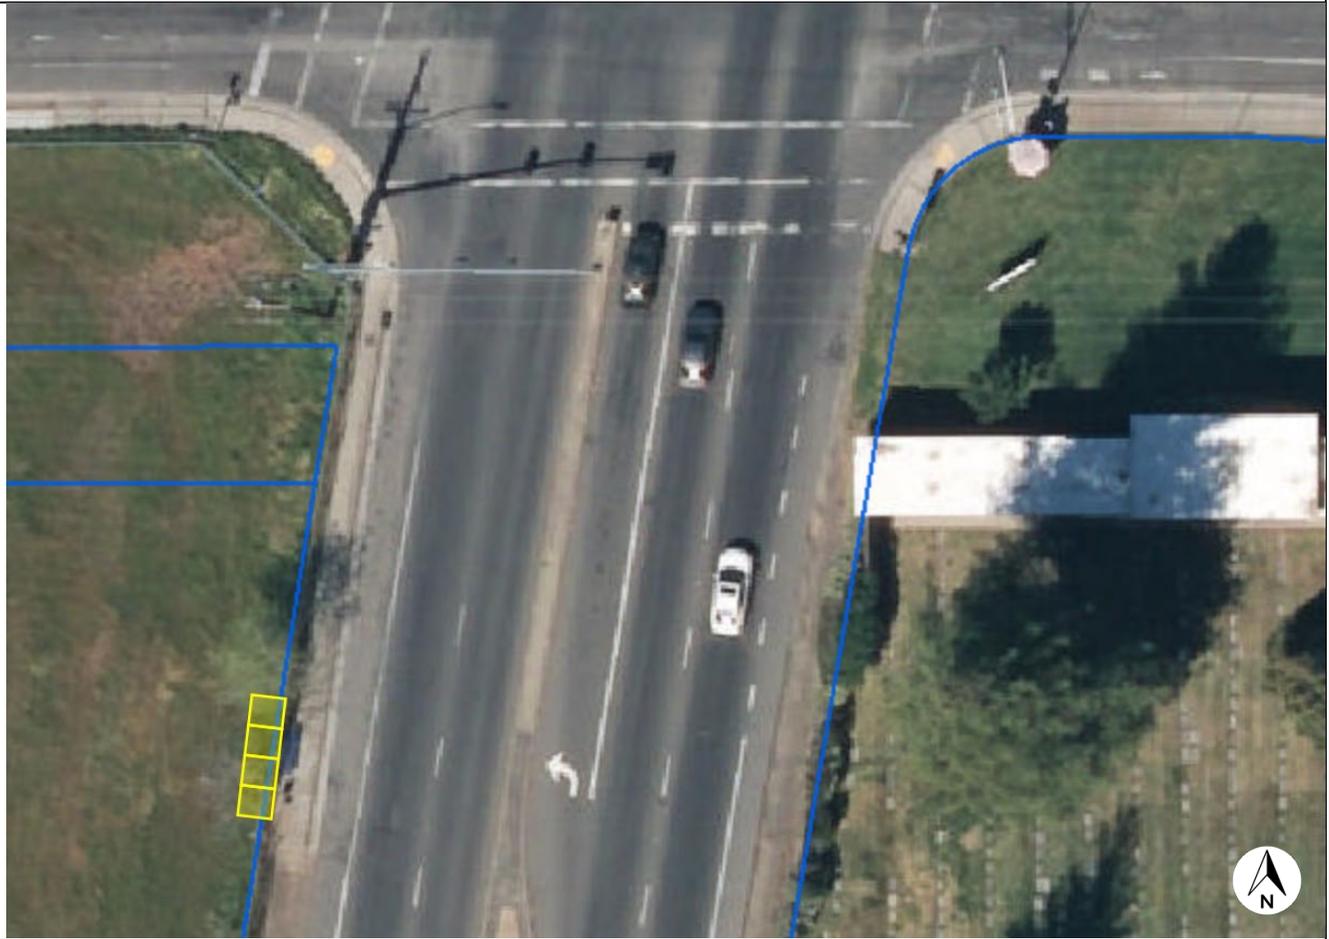


NB 65th St & Fruitridge Rd (FS)	Priority: 5	Stop ID: 3137 48 on, 13 off
--	--------------------	--

Install a new 12' transit shelter and electrical connection
Install new digital sign

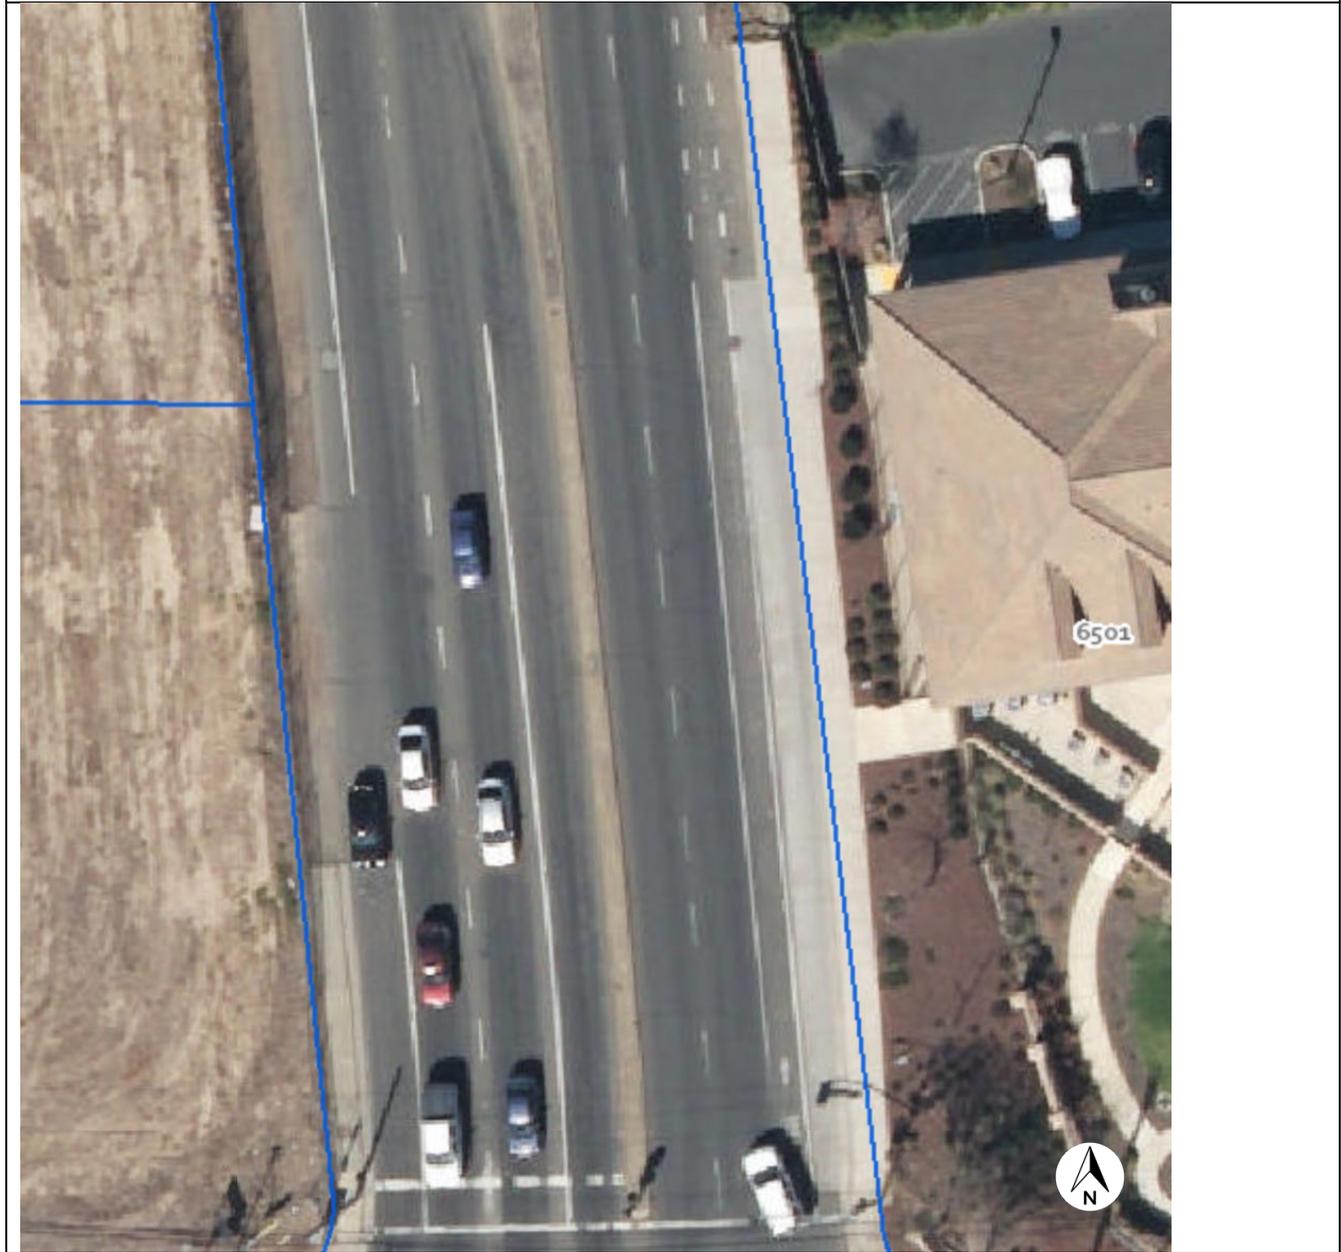


SB 65th St & Fruitridge Rd (FS)	Priority: 7	Stop ID: 1607 19 on, 76 off
--	--------------------	--

Construct 2 x 16' concrete pad behind sidewalk
Install new 8' transit shelter and electrical connection

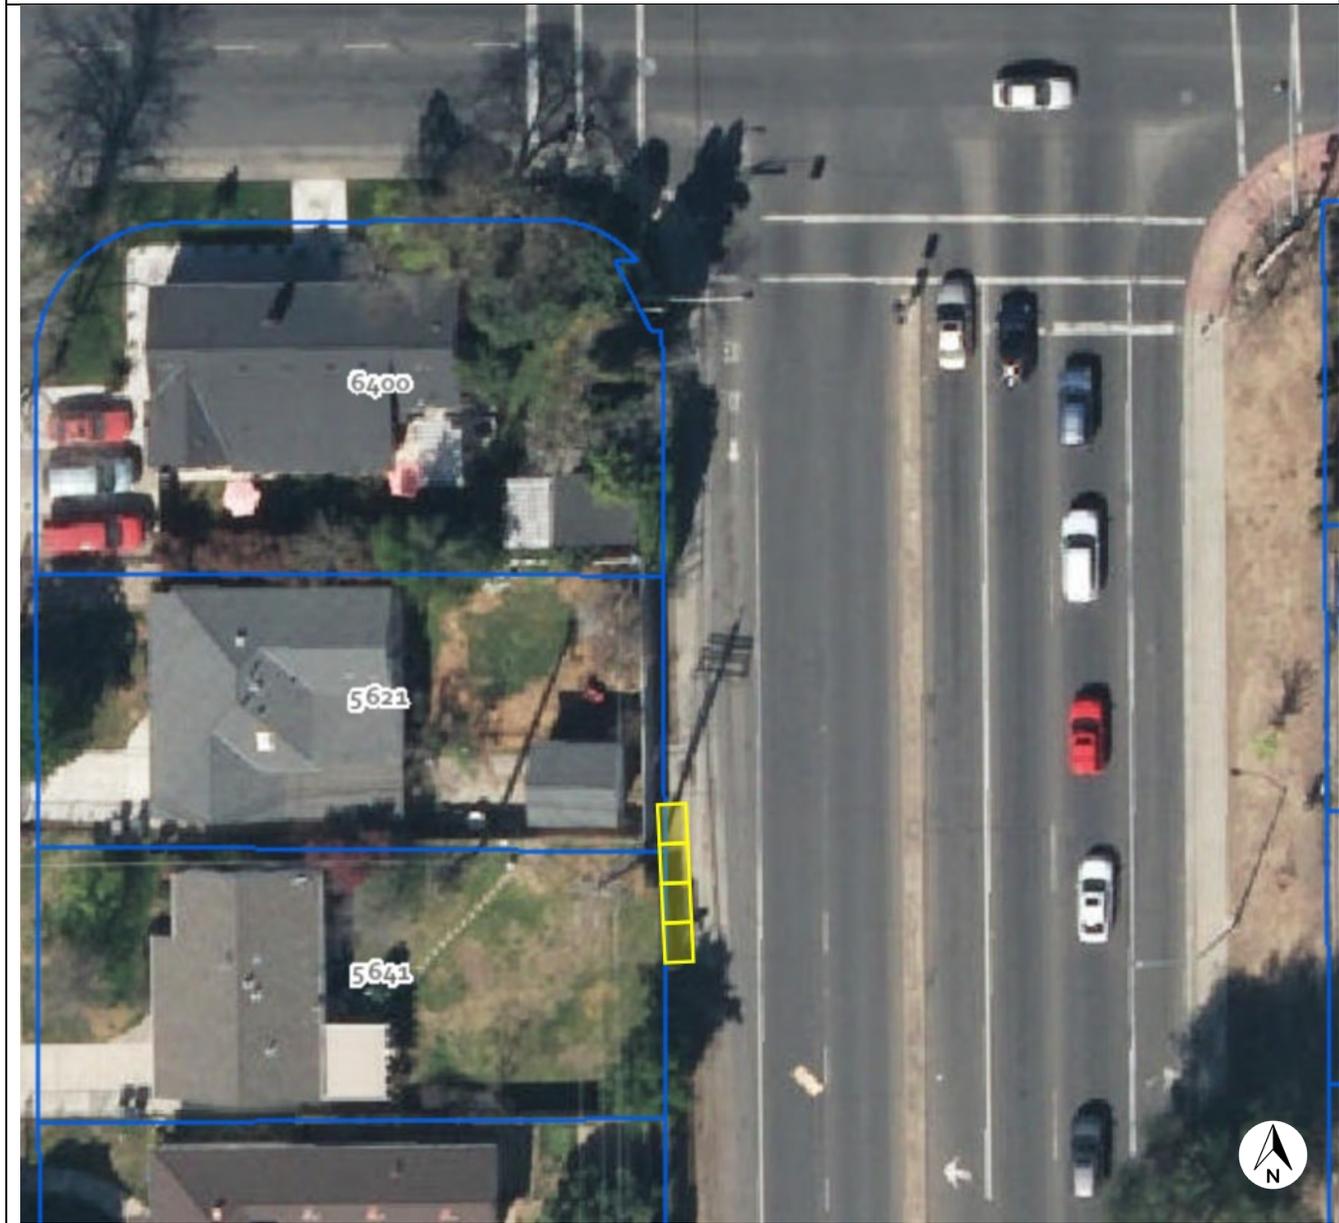

NB 65th St & McMahon Dr (FS)	Priority: 5	Stop ID: 3136 16 on, 7 off
---	--------------------	---

Construct 4 x 4' concrete pad behind sidewalk
Install new bench

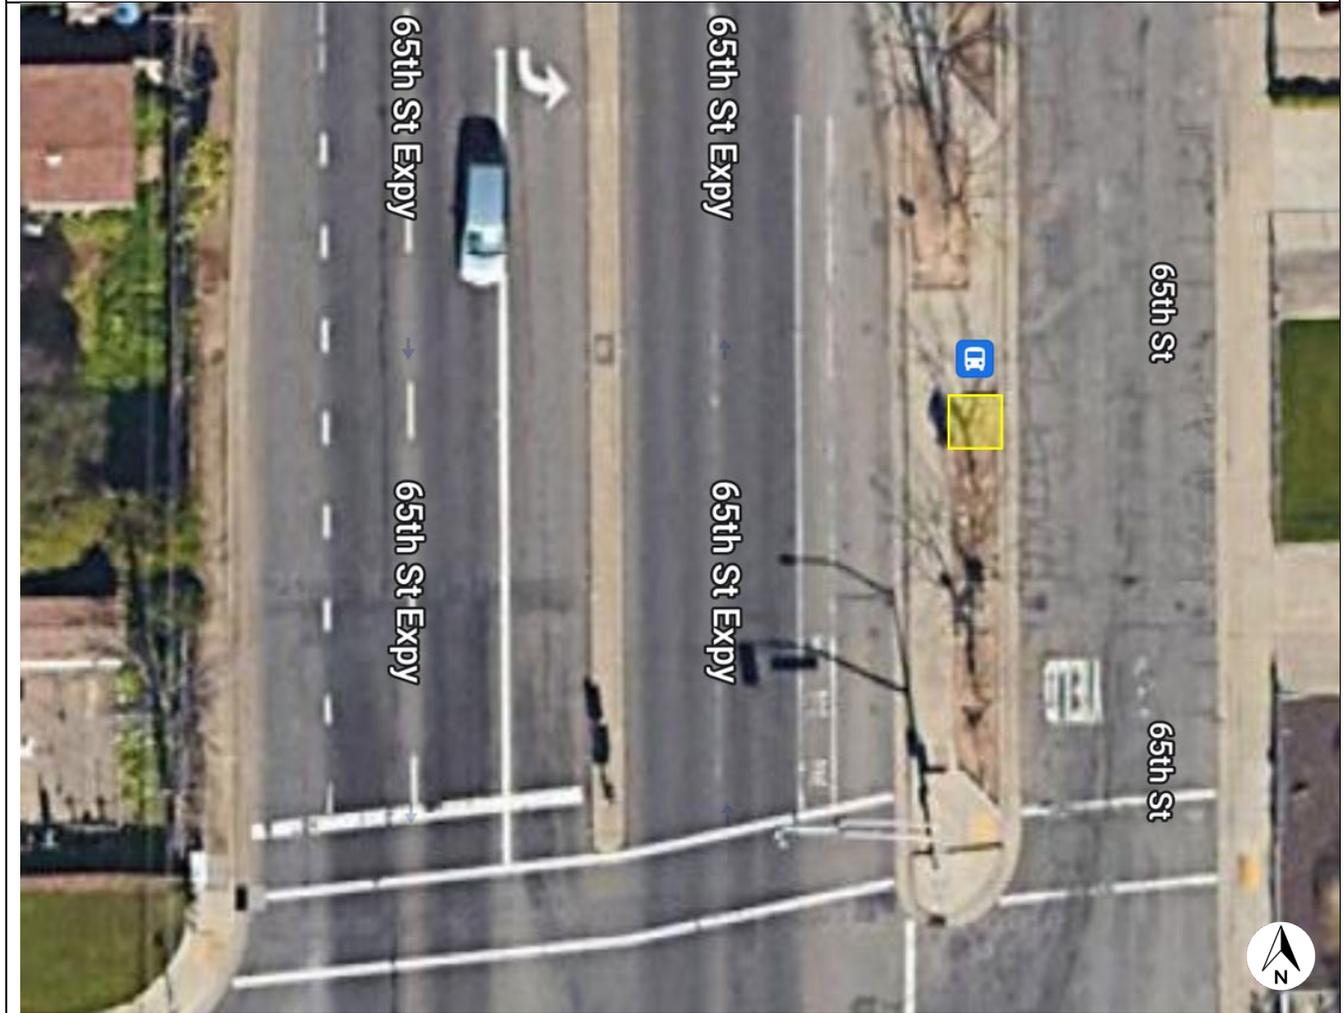


SB 65th St & McMahon Dr (FS)	Priority: 5	Stop ID: 1608 8 on, 21 off
---	--------------------	---

Construct 2 x 16' concrete pad behind sidewalk
Install pedestrian scale lighting




NB 65th St & Lemon Hill Ave (NS)	Priority: 6	Stop ID: 3135 38 on, 15 off
---	--------------------	--

Secure ROW at 6525 Lemon Hill Ave (APN 038-0043-009)
Construct 4x16 concrete pad behind sidewalk
Install new 8' transit shelter and electrical connection

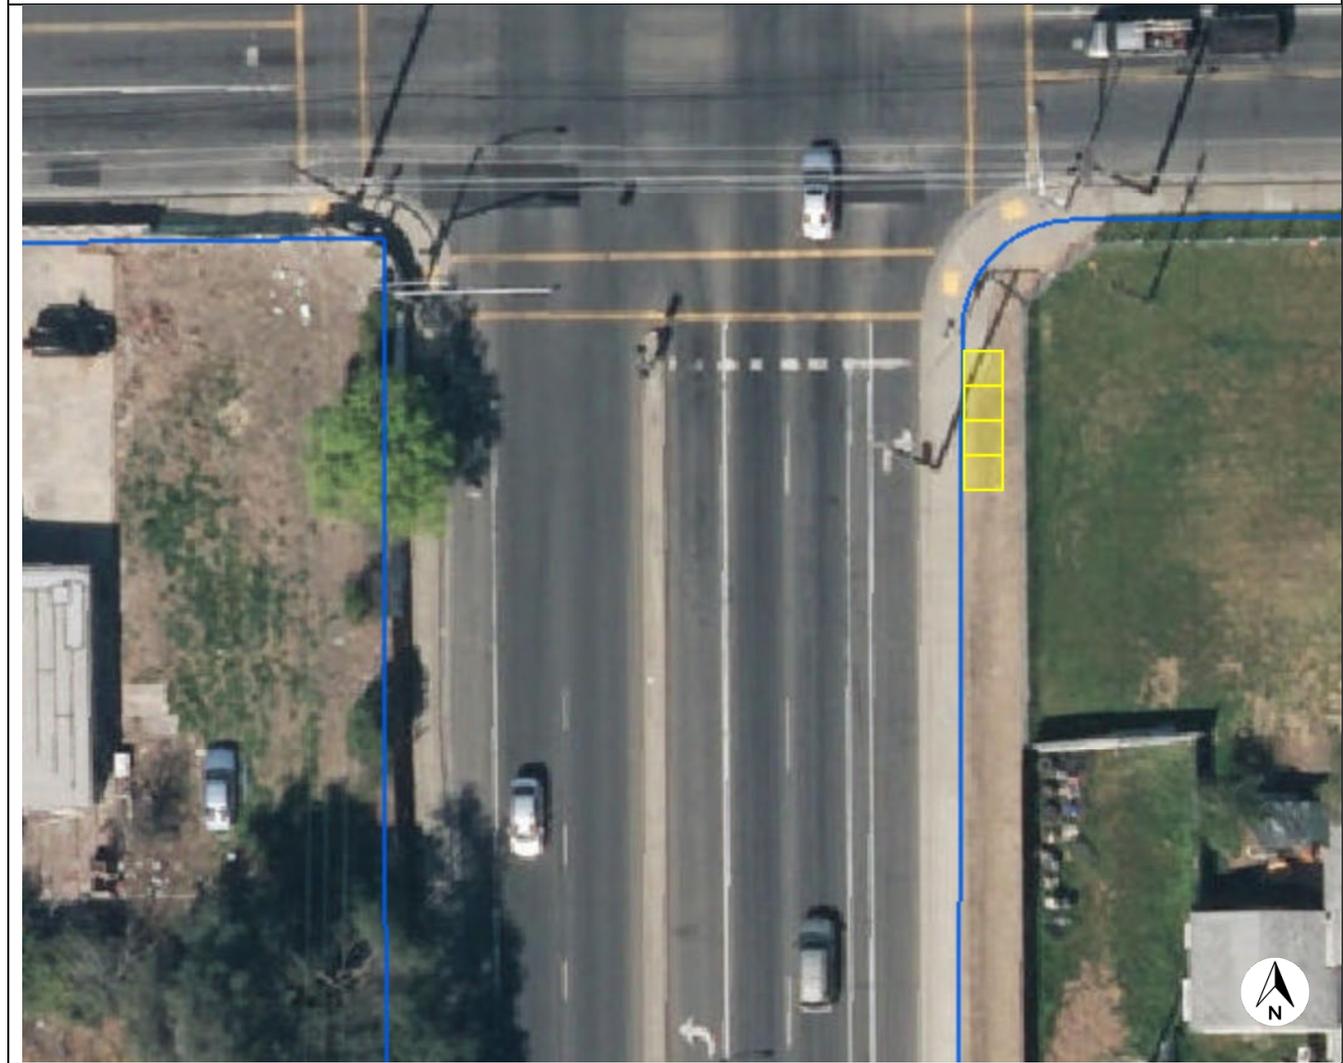


SB 65th St & Lemon Hill Ave (FS)	Priority: 4	Stop ID: 1609 19 on, 44 off
---	--------------------	--

Secure ROW at 6450 Lemon Hill Ave (APN 038-0101-001)
Construct 4x16 concrete pad behind sidewalk
Install new bench
Rebuild fencing

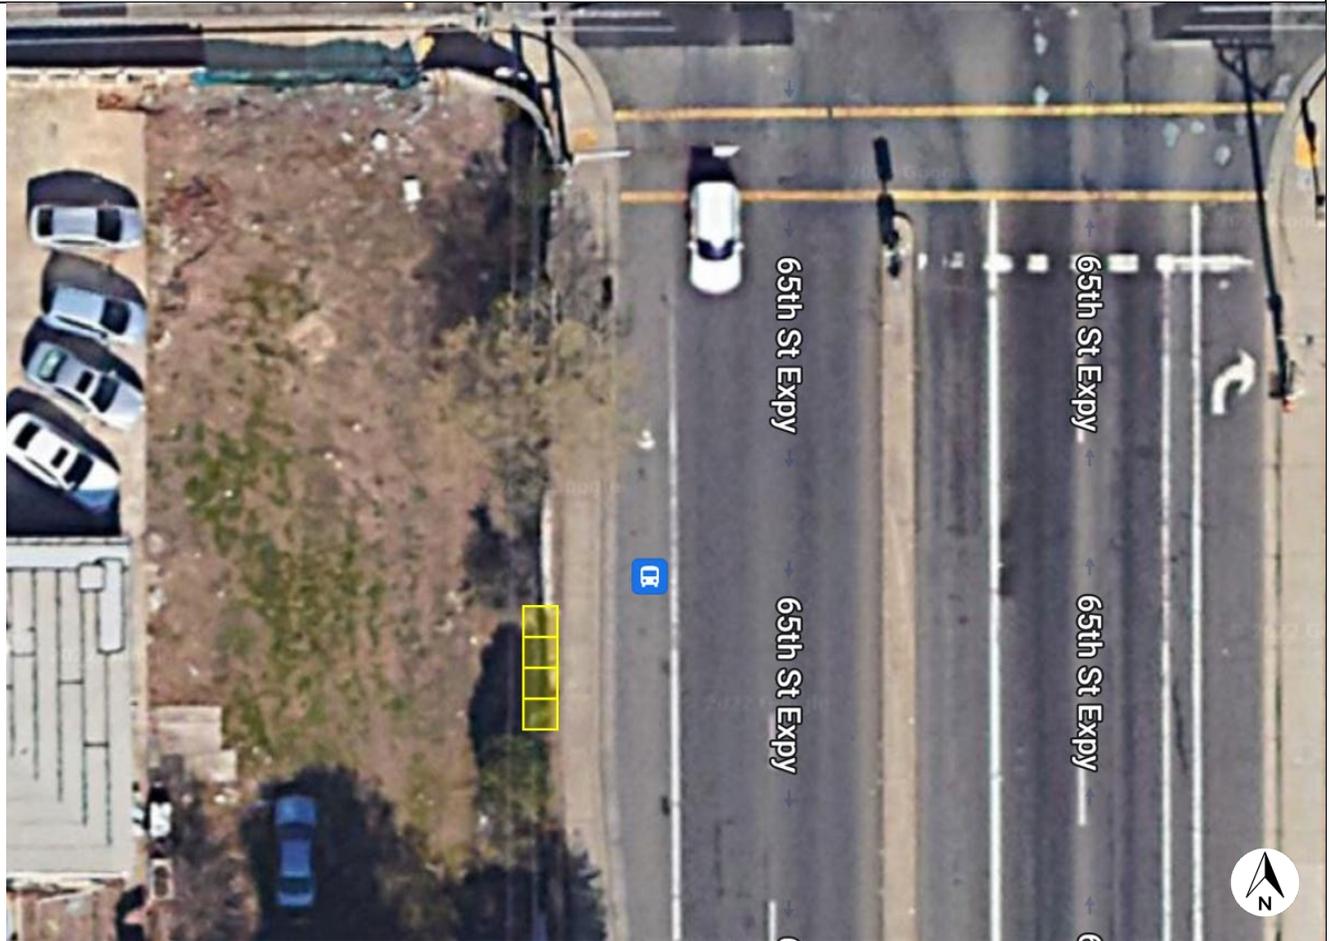

NB 65th St & Elder Creek Rd (FS)	Priority: 6	Stop ID: 3134 56 on, 14 off
---	--------------------	--

Secure ROW at 6501 Elder Creek Rd (APN 038-0210-062)
Construct a 4 x 20' concrete pad behind sidewalk
Install new 12' transit shelter and electrical connection
Install new trash receptacle
Install new digital sign

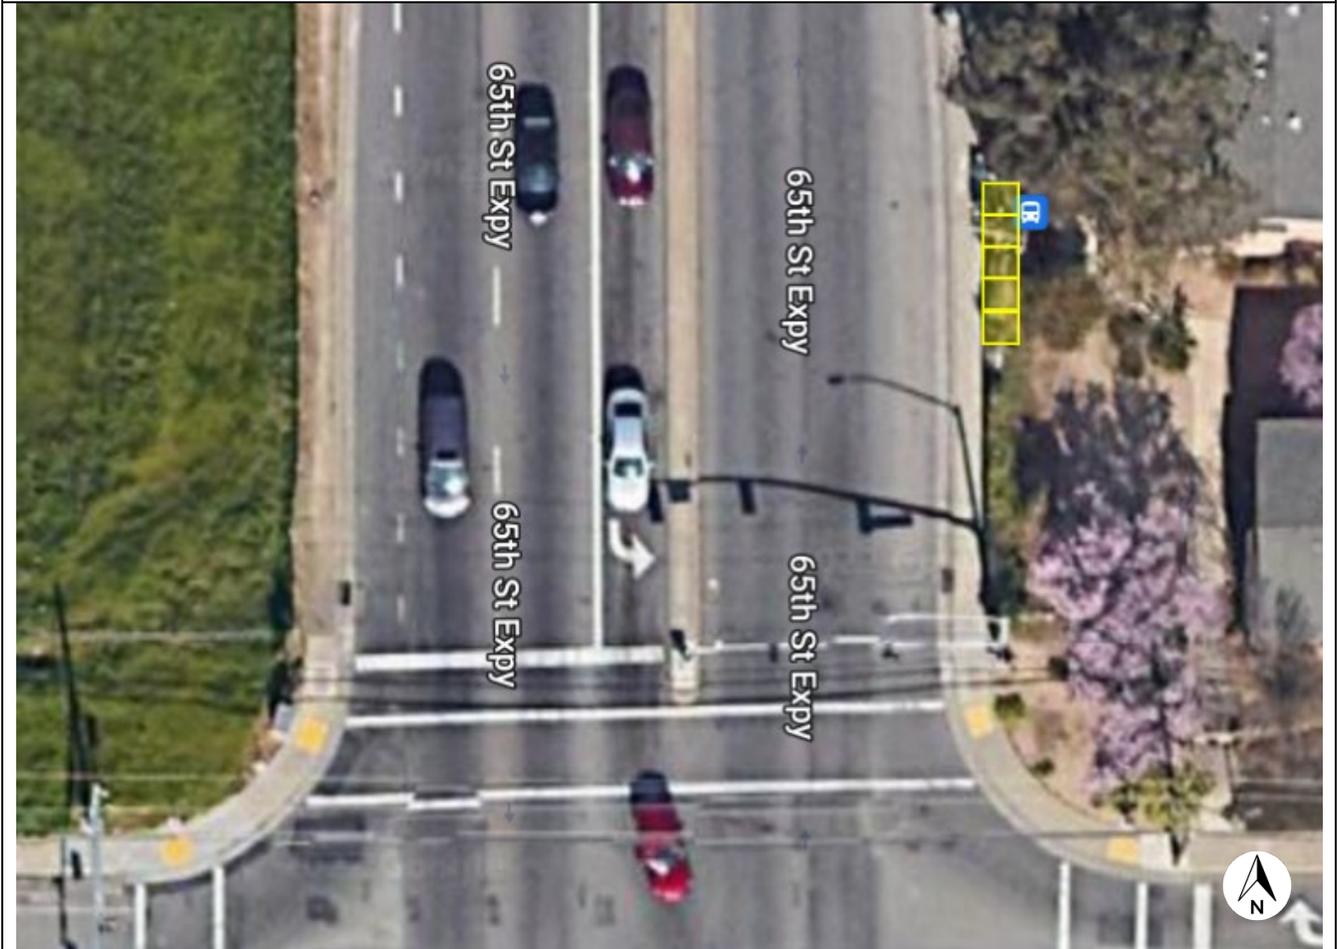


SB 65th St & Elder Creek Rd (FS)	Priority: 6	Stop ID: 1610 11 on, 52 off
---	--------------------	--

Secure ROW at 6436 Elder Creek Rd (APN 040-0010-002)
Construct 4 x 16' concrete pad behind sidewalk
Install pedestrian scale lighting
Reinstall existing bench




SB 65th St & 53rd Ave	Priority: 2	Stop ID: 1611 2 on, 58 off
----------------------------------	--------------------	---

Secure ROW at 6833 Stockton Blvd (APN 043-0220-047)
Construct 4 x 16 concrete pad behind sidewalk
Install new bench

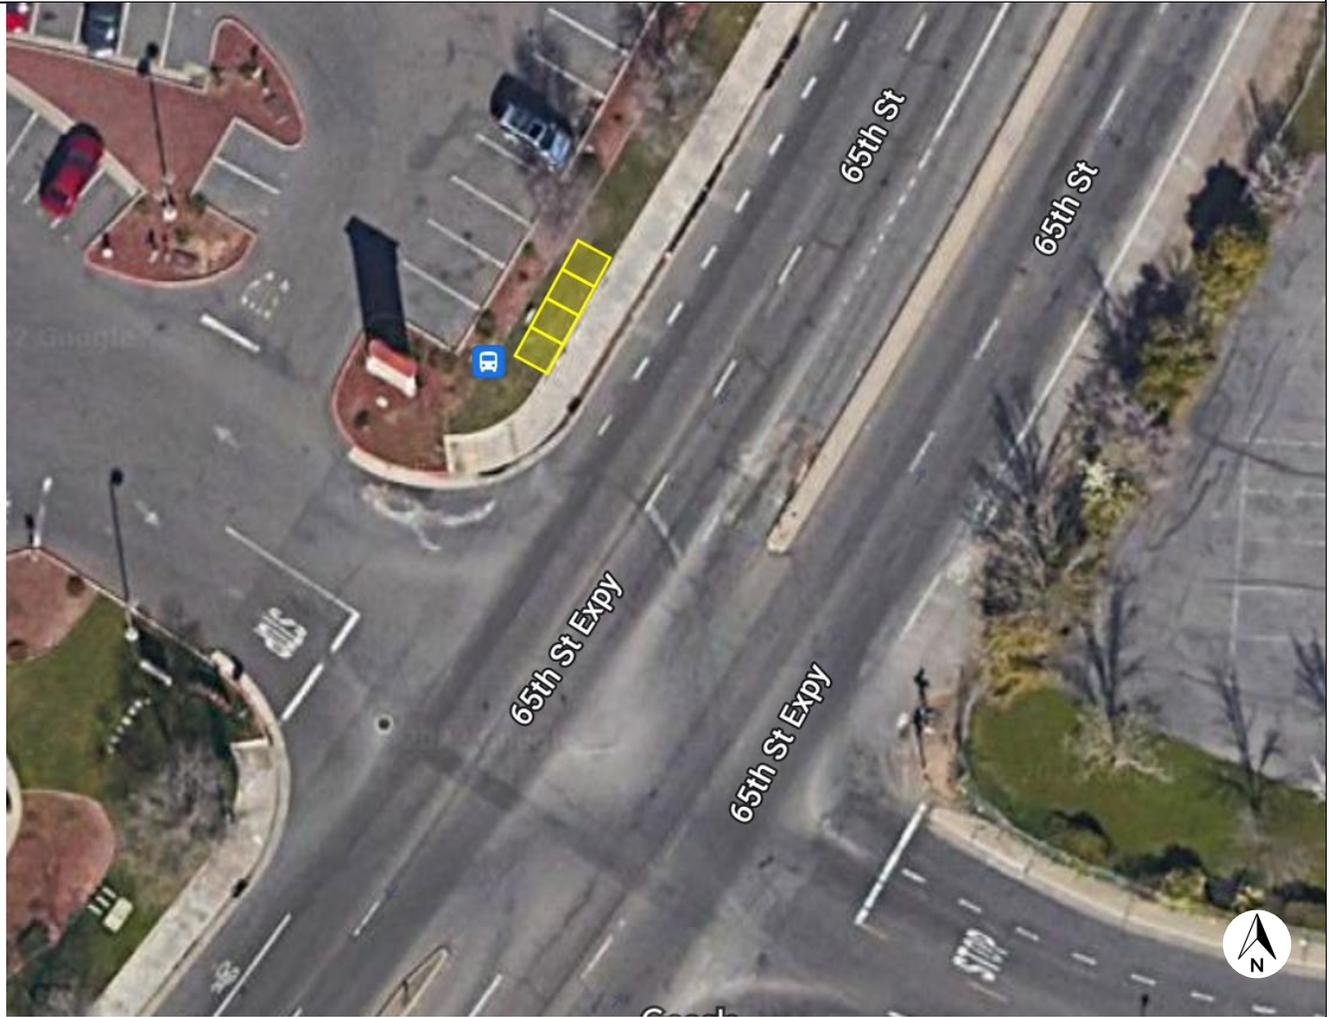

EB 65th St & Stockton Blvd (FS)	Priority: 7	Stop ID: 3132 54 on, 17 off
--	--------------------	--

Secure ROW at 6935 Stockton Blvd (APN 043-0220-038)
Construct 4 x 20' concrete pad behind sidewalk
Install new 12' transit shelter and electrical connection
Install new digital sign

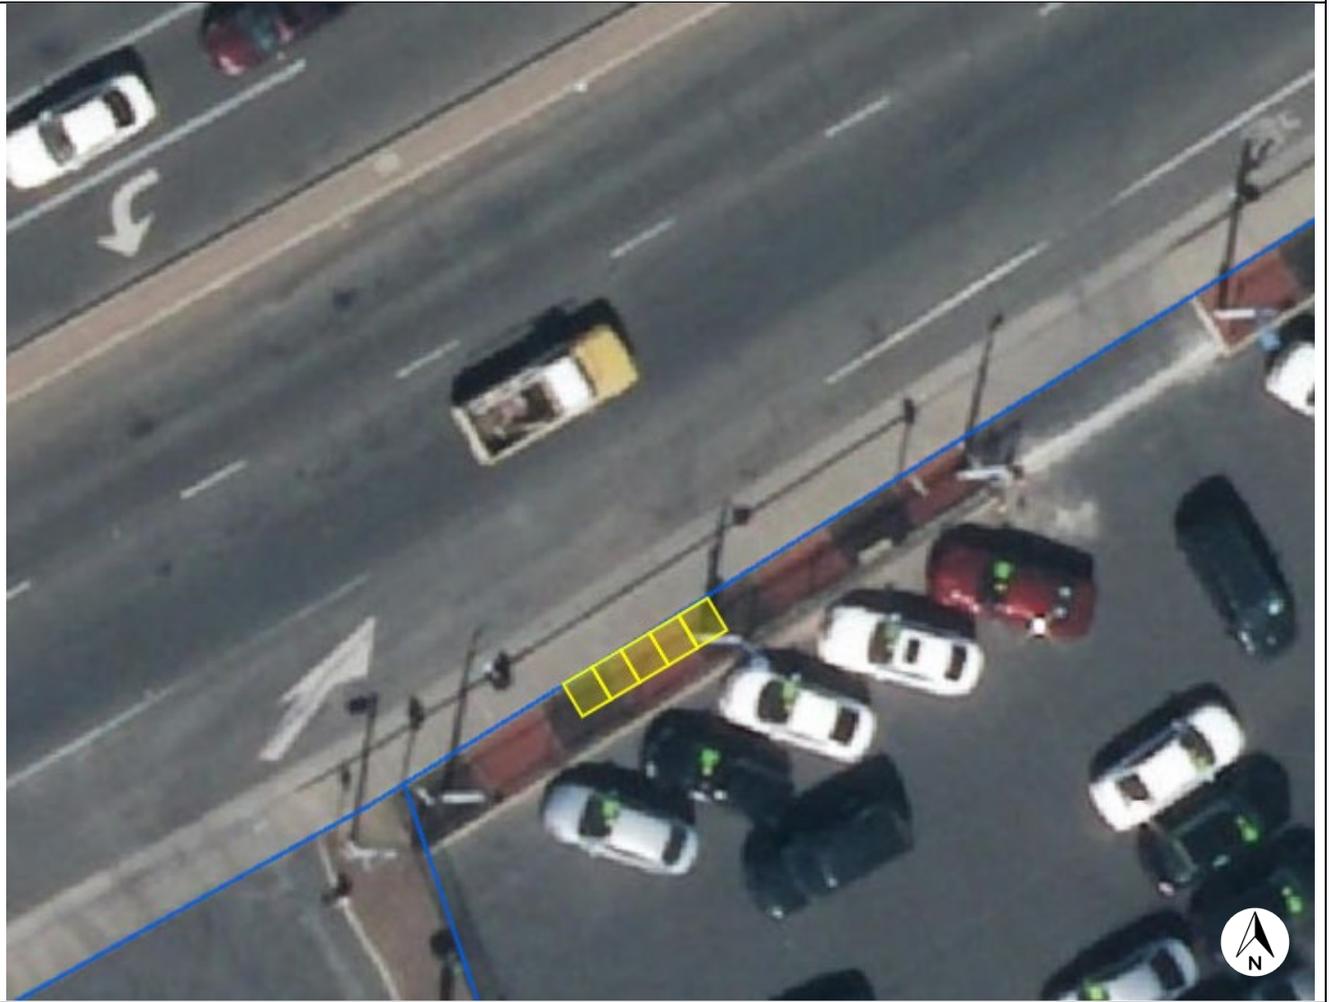


Total Cost:


\$124,000	Design, project approvals
\$170,000	Construction
\$294,000	Total

Corridor Priority Score: 4.2


EB Florin Rd & 25th St (FS)	Priority: 5	Stop ID: 2366 24 on, 5 off
Secure ROW at 2460 FLORIN RD (APN 049-0021-012) Construct new 4 x 16' concrete pad in planter behind existing s/w Install new 12' shelter and electrical connection Install original sign onto shelter		

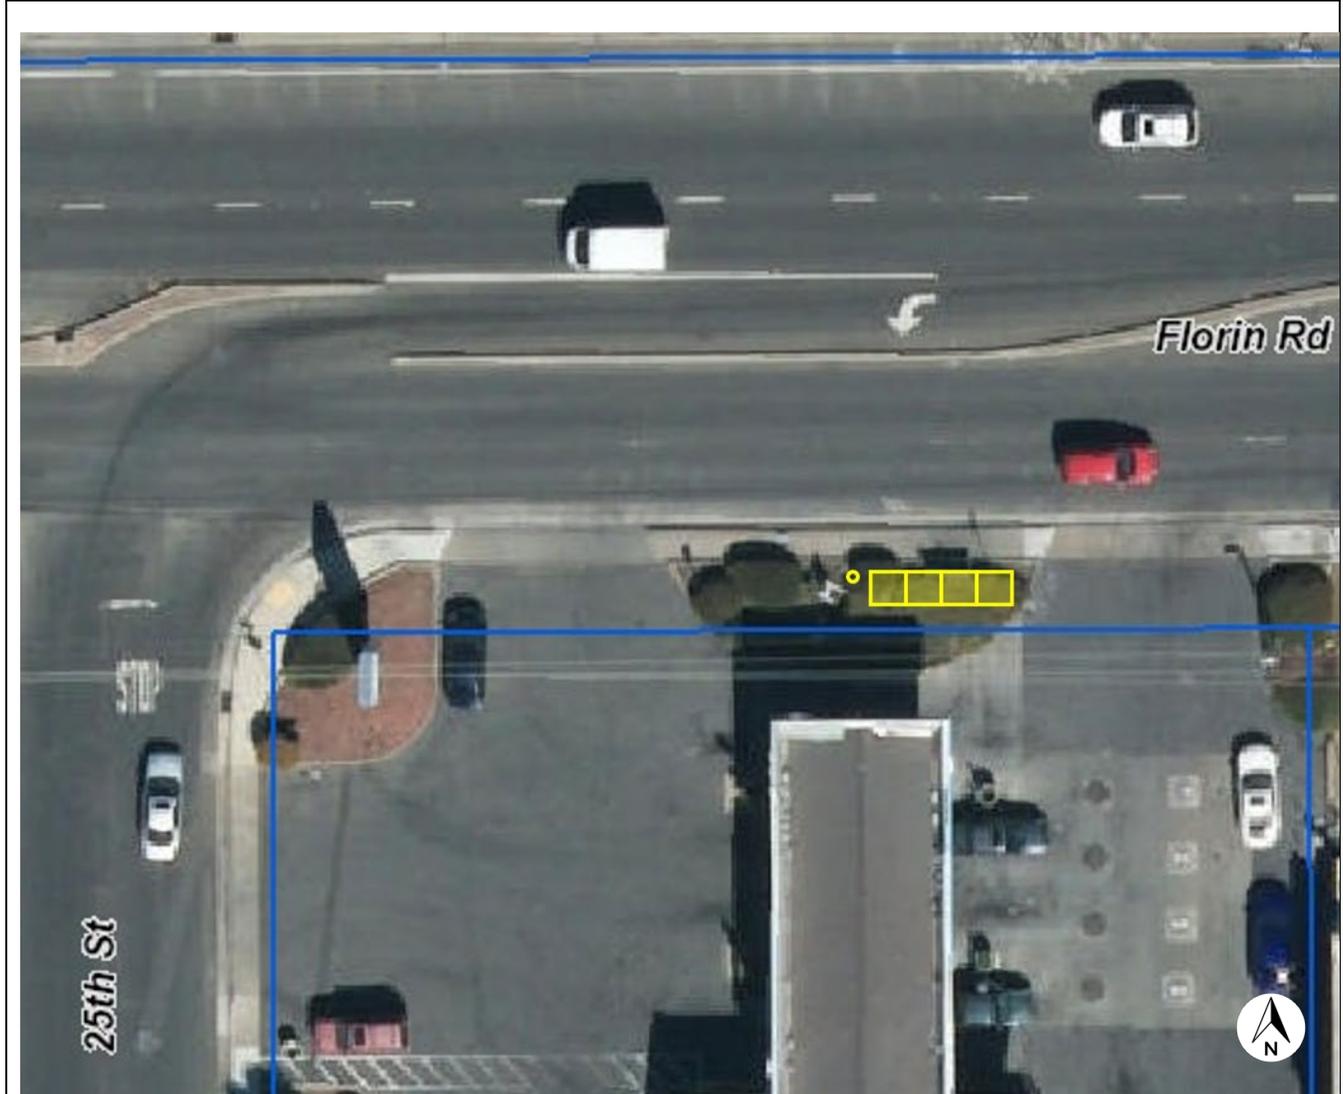

EB Florin Rd & Loma Verde Way (FS)	Priority: 2	Stop ID: 2367 2 on, 9 off
Secure ROW at 2720 FLORIN RD (APN 049-0021-048) Construct new 4 x 16' concrete pad behind existing s/w Demolish 16' of existing retaining curb Install bench Replace 4 x 16 x 4' retaining curb Reinstall Sign Pole		

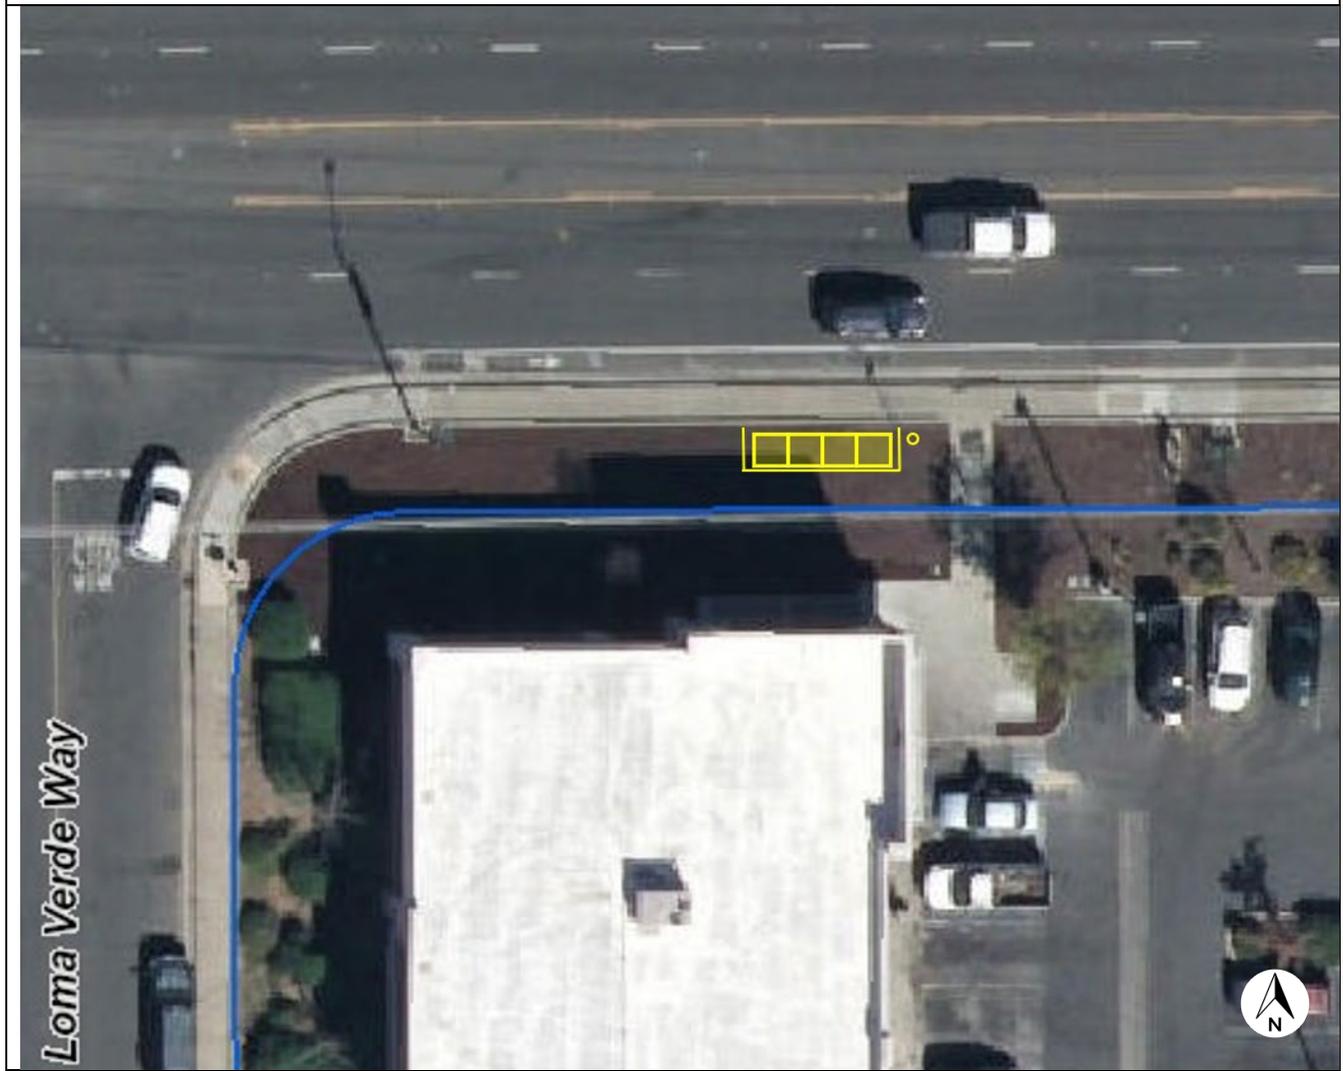

EB Florin Rd & Sundown Dr (MB)	Priority: 3	Stop ID: 2369 6 on, 1 off
Secure ROW at 3026 FLORIN RD (APN 049-0360-010) Level landscape area behind existing s/w Construct new 4 x 16' concrete pad behind existing s/w Install new bench Relocate existing pole and bus stop sign 12' west		

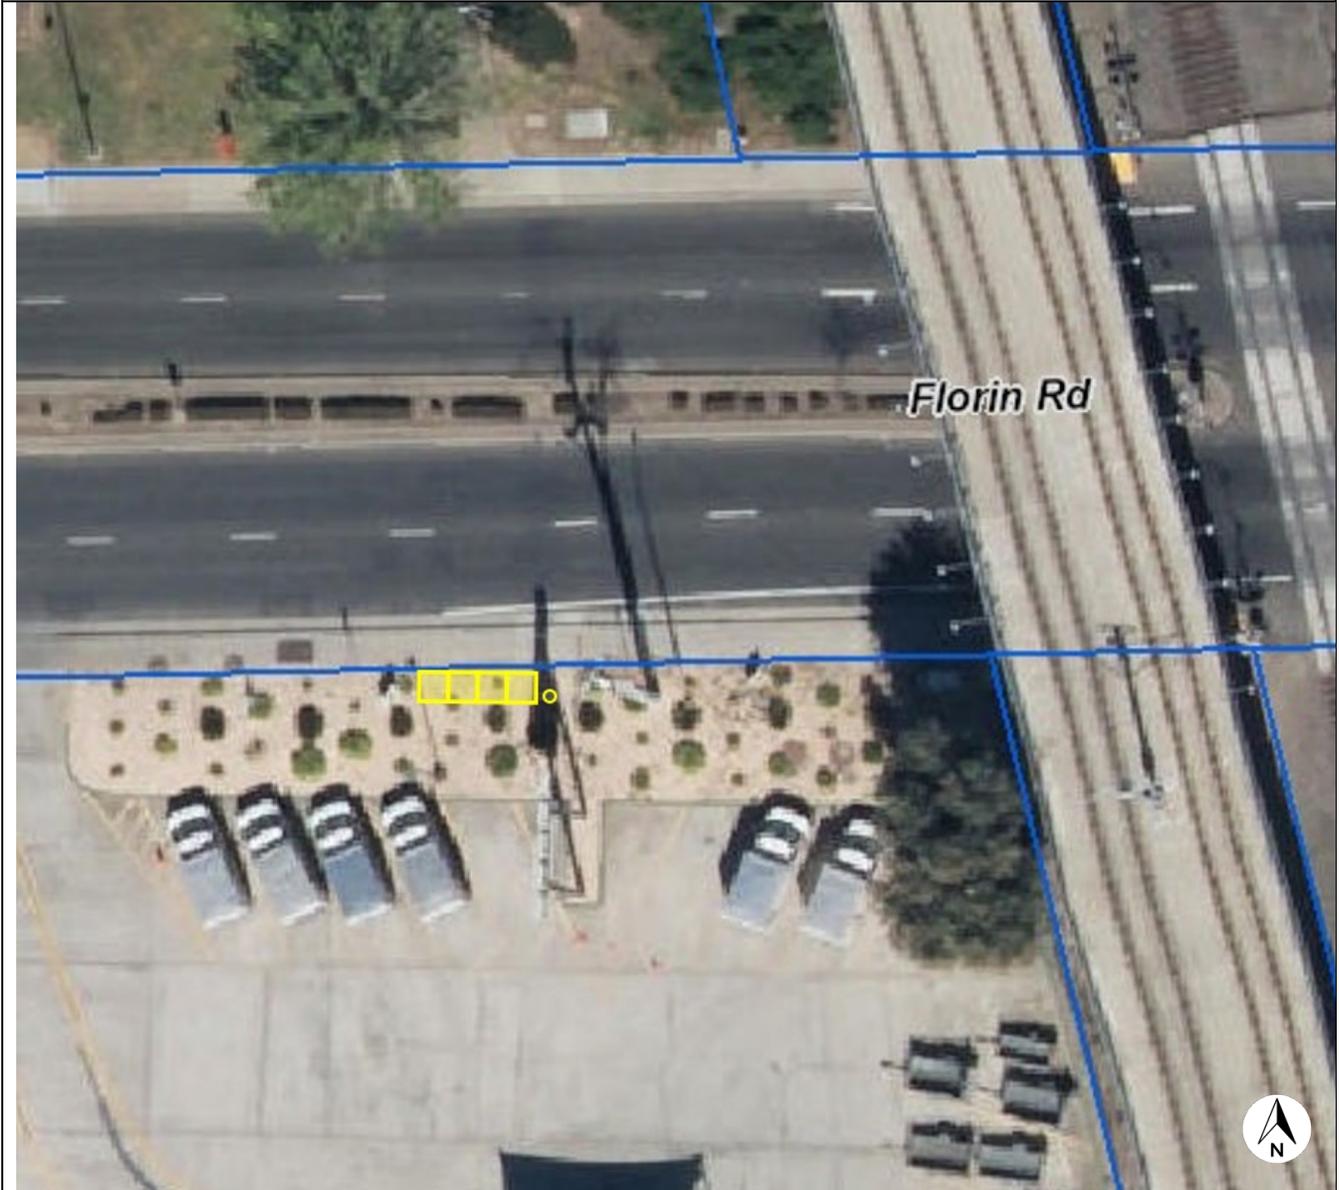


WB Florin Rd & W Serenity Dr (MB)	Priority: 9	Stop ID: 2315 23 on, 37 off
Secure ROW at 3465 FLORIN RD (APN 041-0112-026) Construct new 4 x 16' concrete pad behind existing s/w Install new 12' shelter and electrical connection Relocate existing chain link fence behind new shelter Install new pole 30' to the east and reattach existing sign		



EB Florin Rd & Munson Way (FS)	Priority: 2	Stop ID: 2371 22 on, 49 off
---	--------------------	--

Install new 12' shelter on existing pad

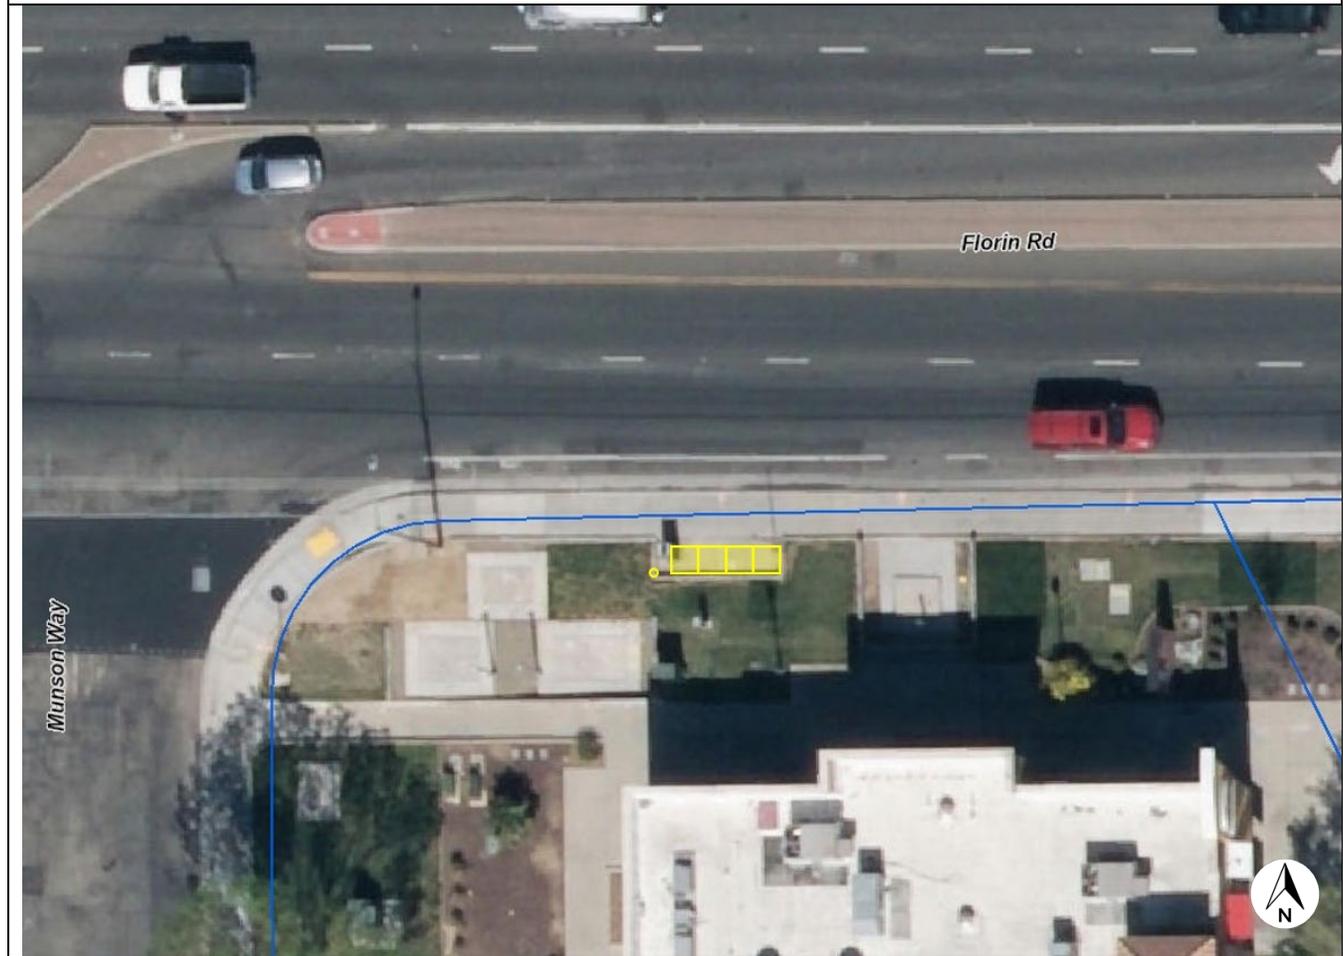

Corridor #48
Franklin Blvd
47th Ave to Florin Rd

Jurisdiction:
Sacramento County



Corridor Length:
1 mile

Number of Stops:

7 – No Changes Needed

4 – Minor/Moderate Changes Recommended

0 – Major Changes Needed – Not Currently Feasible

0 – crossings needed

Total Cost:

\$84,500	Design, project approvals
\$98,000	Construction
\$182,500	Total

Corridor Priority: 5.0

SB Franklin Blvd & 47th Ave (FS)	Priority: 4	Stop ID: 2592 5 on, 2 off
Relocate stop approx 50 feet south Secure ROW at 6416 Franklin Blvd (APN 036-0161-034) Construct 4 x 16 concrete pad behind sidewalk		




SB Franklin Blvd & Green Tree Dr (NS)	Priority: 4	Stop ID: 2596 0 on, 7 off
Secure ROW at 6960 Franklin Blvd (APN 041-0130-010) Construct 4 x 16 concrete pad behind sidewalk Relocate pole and sign		



NB Franklin Blvd & Green Tree Dr (FS)	Priority: 5	Stop ID: 2598 5 on, 0 off
Construct 4 x 16' concrete pad behind sidewalk Install pedestrian scale lighting		



NB Franklin Blvd & Florin Rd (FS)	Priority: 7	Stop ID: 2597 80 on, 24 off
Secure ROW at 7151 Franklin Blvd (APN 042-0150-002) Construct 4 x 24' concrete pad behind sidewalk Install new 16' shelter and electrical connection Install new digital sign Relocate trash can onto pad		

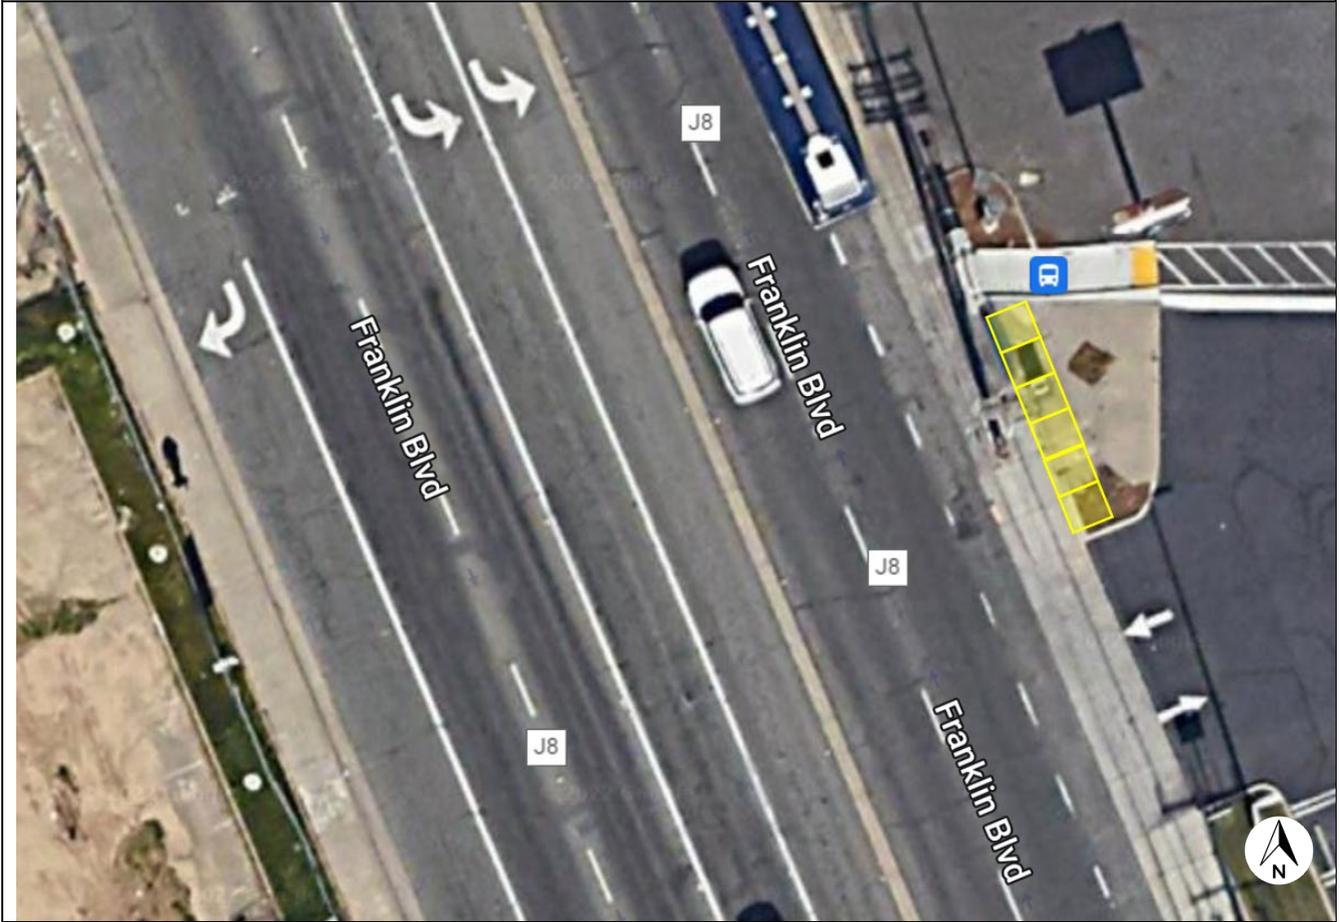


Corridor #49

Florin Rd

Franklin Blvd to Stockton Blvd

Jurisdiction:

Sacramento County

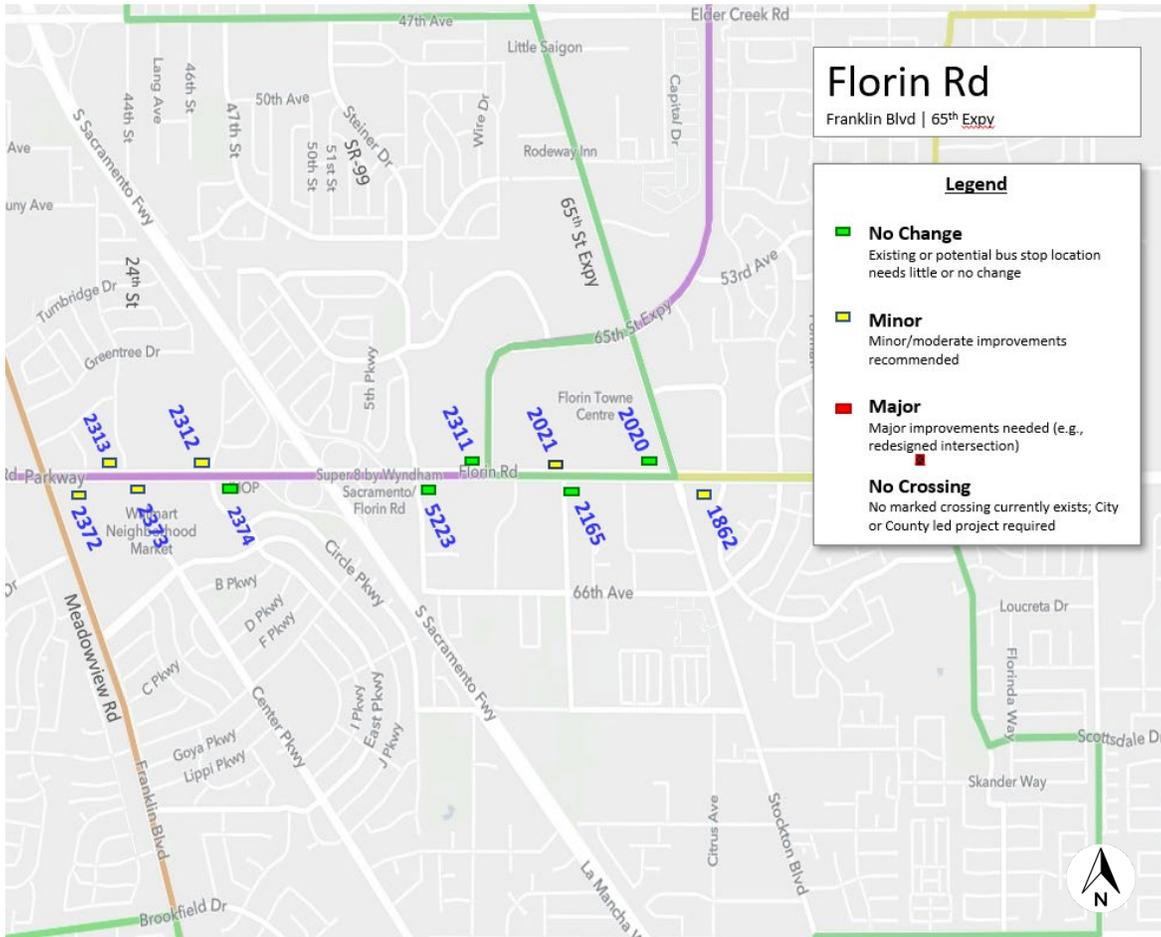

Corridor Length:

1.75 miles

Number of Stops:

5 – No Changes Needed

6 – Minor/Moderate Changes Recommended

0 – Major Changes Needed – Not Currently Feasible

0 – crossings needed

Total Cost:

\$139,000	Design, project approvals
\$236,000	Construction
\$375,000	Total

Corridor Priority Score: 6

EB Florin Rd & Franklin Blvd (FS)	Priority: 6	Stop ID: 2372 61 on, 57 off
Install 12' shelter on existing pad Install existing sign on shelter Install digital sign		
		

WB Florin Rd & Bowling Dr (FS)	Priority: 8	Stop ID: 2313 45 on, 80 off
---	--------------------	--

- Remove existing bench
- Relocate existing pole 15' west
- Construct 4 x 20' concrete pad in existing planter
- Install new 16' shelter and electrical connection
- Reinstall existing trash receptacle
- Install existing bus stop sign on shelter
- Install new digital sign



EB Florin Rd & Bowling Dr (FS)	Priority: 7	Stop ID: 2373 61 on, 49 off
---	--------------------	--

- Secure ROW at 4420 FLORIN RD (APN 050-0630-017)
- Demolish existing retainer curb
- Construct new 4 x 20' concrete pad (1' along existing s/w extension and 3' into planter.)
- Construct new 3 x 20 x 3' retaining curb
- Install 16' shelter and electrical connection
- Install trash receptacle
- Reinstall existing benches under shelter
- Reinstall existing sign to shelter
- Install new digital sign



WB Florin Rd & East Pkwy (FS)	Priority: 4	Stop ID: 2312 47 on, 49 off
Install bench under existing shelter Install new digital sign		




WB Florin Rd & Florin Mall (FS)	Priority: 5	Stop ID: 2021 4 on, 40 off
--	--------------------	---------------------------------------

Relocate existing bus stop sign and pole 60' west from light pole next to tree



EB Florin Rd & Stockton Blvd (FS)	Priority: 6	Stop ID: 1862 31 on, 12 off
--	--------------------	--

Secure ROW at 6510 FLORIN RD (APN 051-0010-064)
Relocate stop 15' east
Demolish existing retaining curb
Construct 4 x 16' concrete pad behind existing s/w
Install new bench
Reconstruct retaining curb 5 x 20 x 5' around new pad
Relocate existing trash can to existing pad
Install new bus stop sign pole
Reinstall original bus stop sign to pole

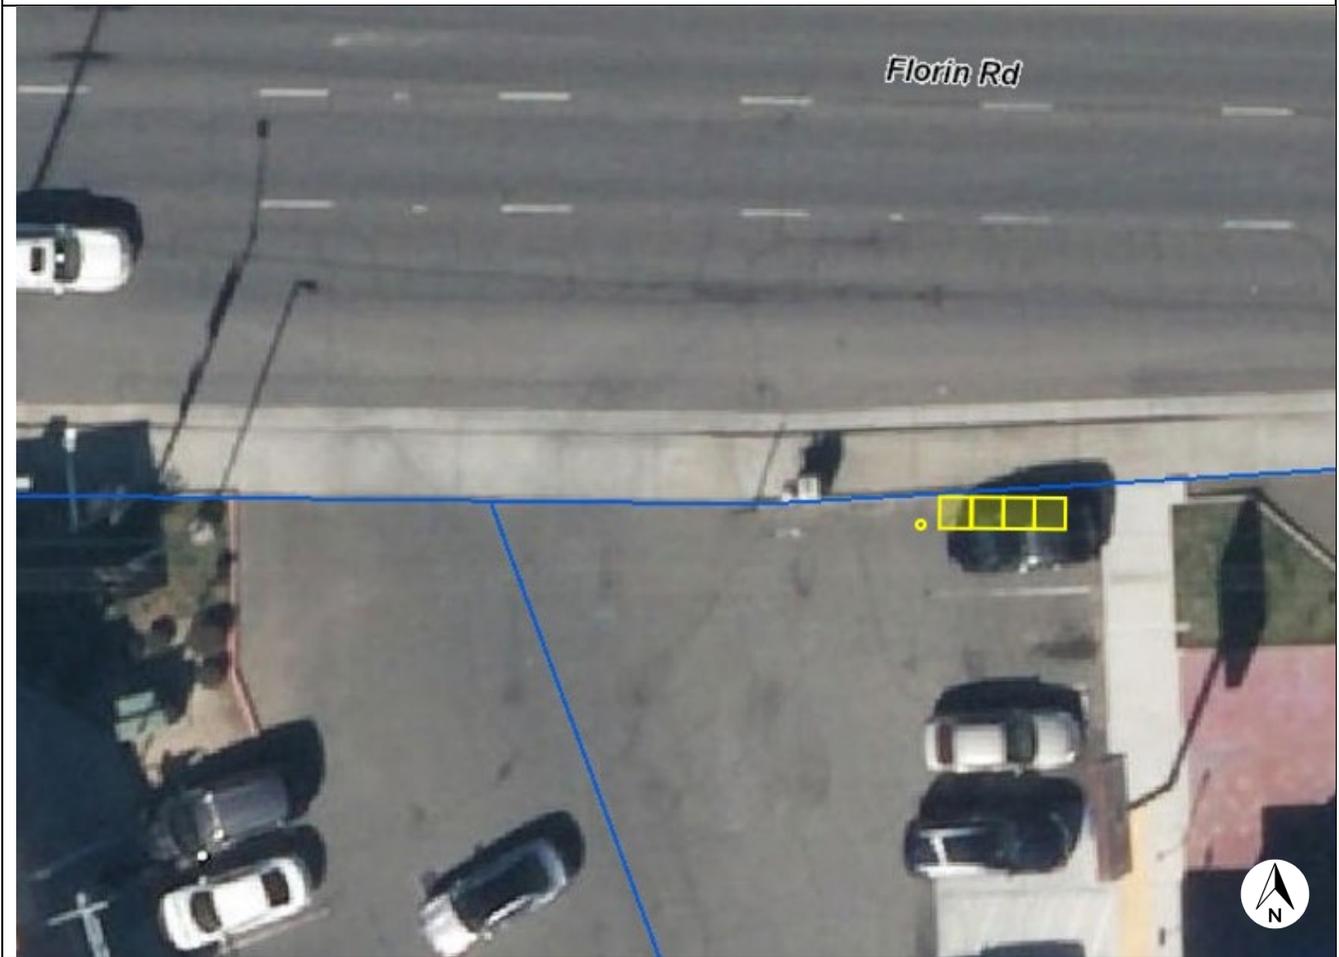


Corridor #50

Briggs Dr

Lawnwood Dr to Florin Rd

Jurisdiction:

Sacramento County

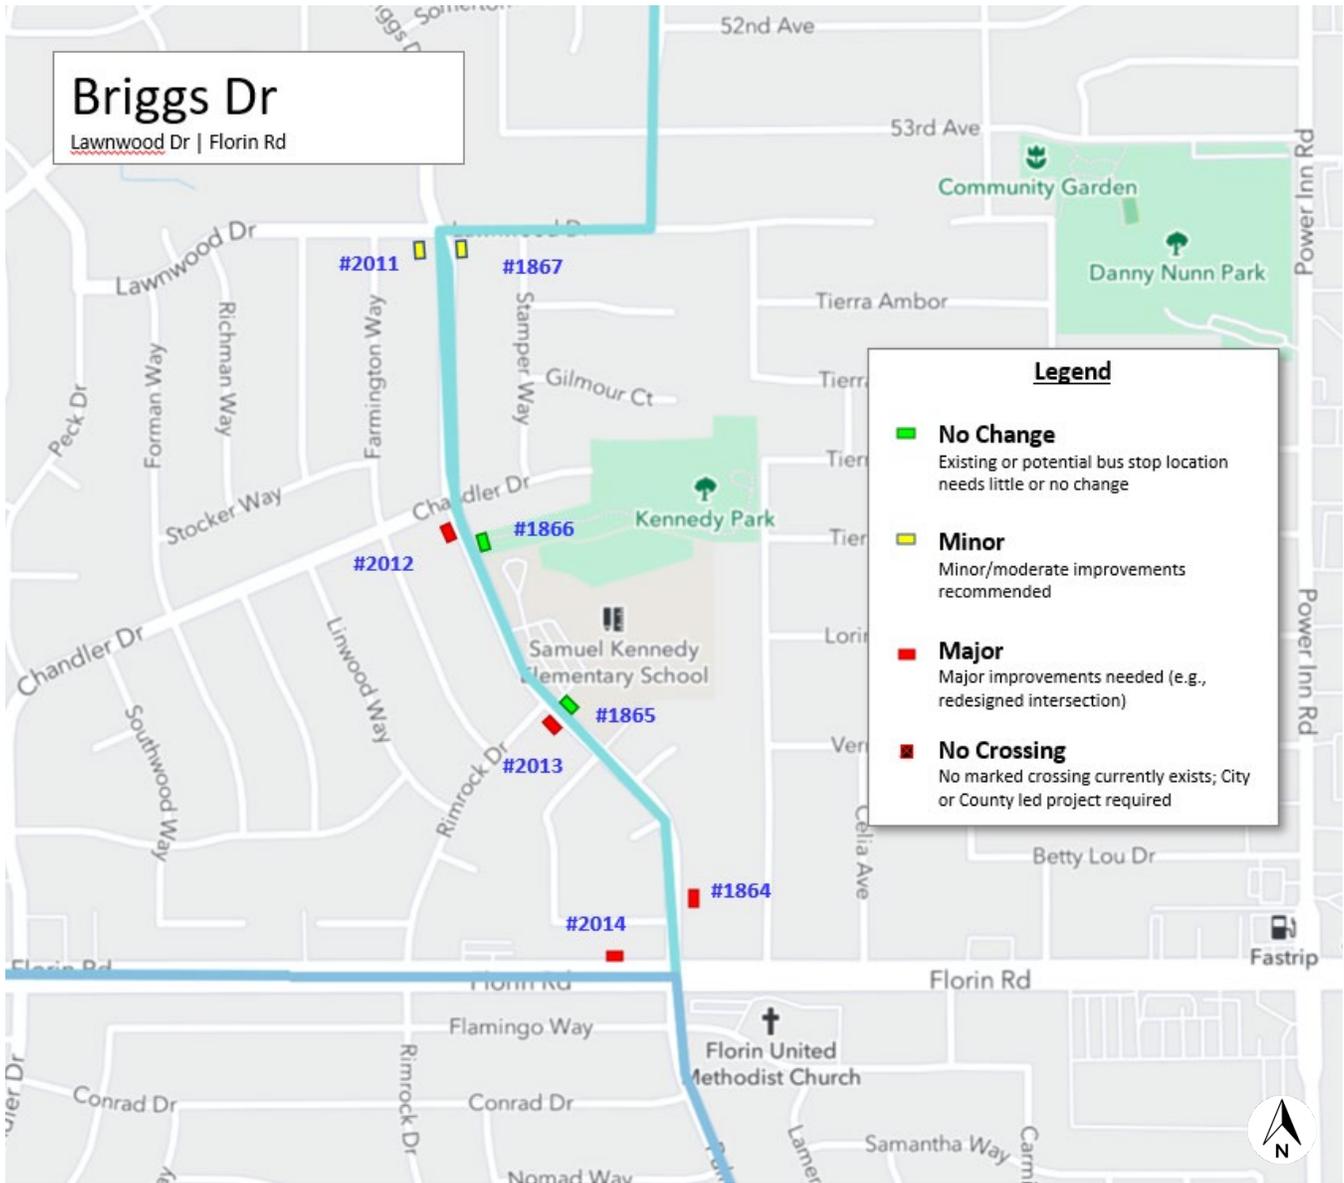

Corridor Length:

0.5 miles

Number of Stops:

2 – No Changes Needed

2 – Minor/Moderate Changes Recommended

4 – Major Changes Needed – Not Currently Feasible

0 – crossings needed

Total Cost:

\$185,000	Design, project approvals
\$337,000	Construction
\$522,000	Total

Corridor Priority Score: 3.0

Notes:

This corridor has many substandard bus stops, which prompted SacRT to include it in this study; however, very few such stops were determined to have feasible ways to improve them, typically due to lack of good locations to build a new stop or make improvements to an existing stop. Red has been used to depict potential improvements to several stops that might be desirable, but that are not likely to be feasible without a comprehensive modernization to the entire corridor.

NB Briggs Dr & Lawnwood Dr (NS)	Priority: 3	Stop ID: 1867 0 on, 3 off
Secure ROW at 7200 Lawnwood Dr (APN 043-0153-012) Construct 4 x 8' concrete pad behind existing sidewalk Replace 80' of rolled curb and gutter w/ vertical curb and reinforced gutter Rebuild 5 x 80' sidewalk Repave 21 x 80' of roadway from gutter to first lane line Install pedestrian scale lighting		




SB Briggs Dr & Lawnwood Dr (FS)	Priority: 3	Stop ID: 2011 3 on, 2 off
Secure ROW at 7140 Lawnwood Dr (APN 043-0154-010) Construct 4 x 8' concrete pad behind existing sidewalk Replace 90' of rolled curb and gutter w/ vertical curb and reinforced gutter Rebuild 5 x 90' sidewalk Repave 21 x 90' of roadway from gutter to first lane line Install pedestrian scale lighting		




SB Briggs Dr & Chandler Dr (FS)	Priority: 2	Stop ID: 2012 1 on, 1 off
Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost 8-foot sidewalk or landing needed, per standard; however, acquisition of necessary space appears infeasible		



SB Briggs Dr & Rimrock Dr (FS)	Priority: 2	Stop ID: 2013 2 on, 2 off
Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost 8-foot sidewalk or landing needed, per standard; however, acquisition of necessary space appears infeasible		

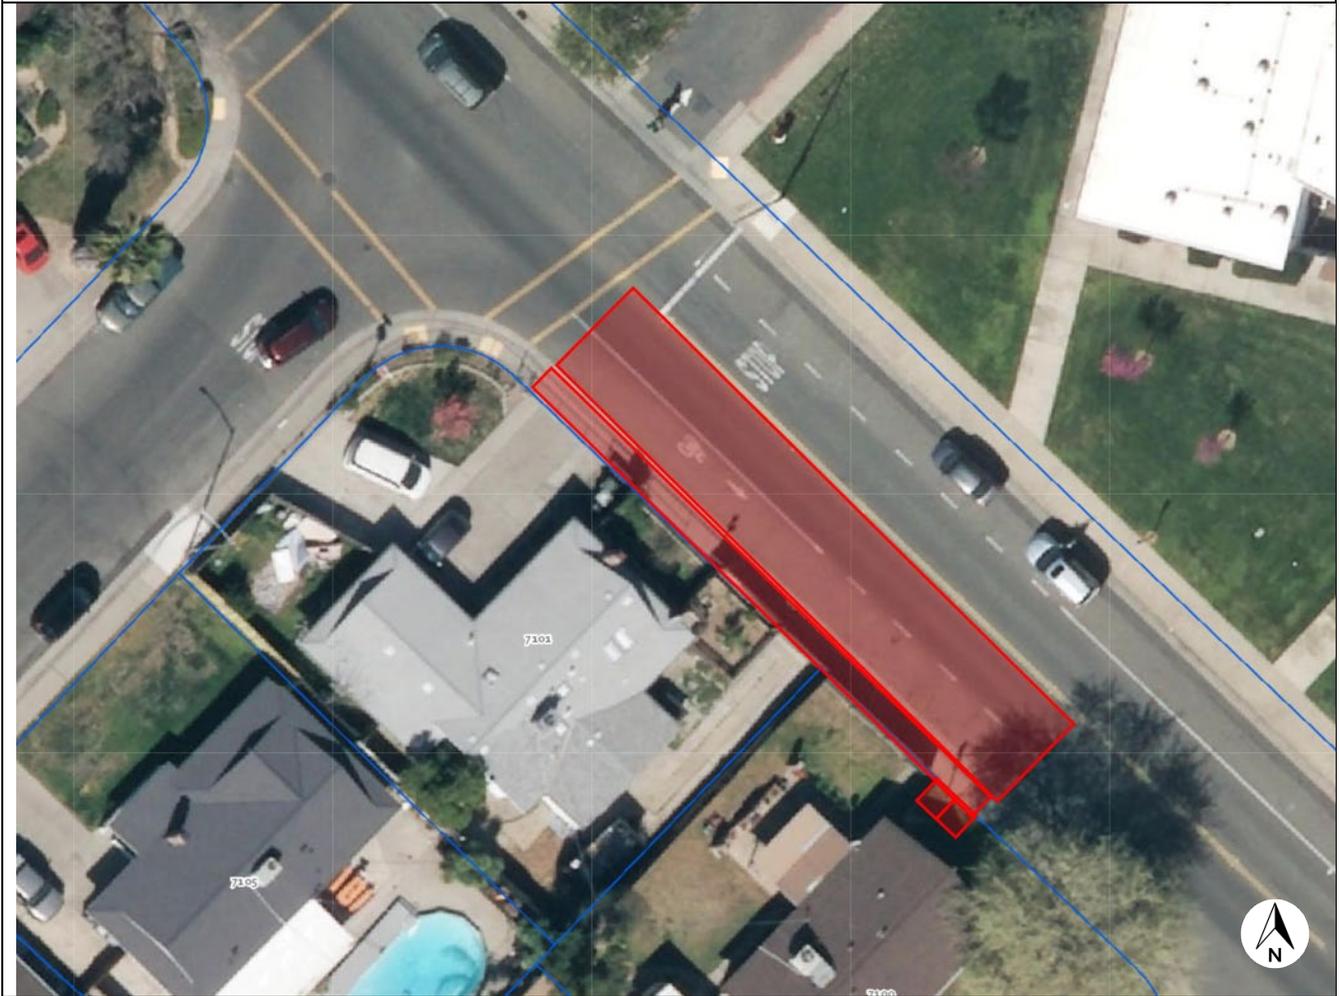

NB Briggs Dr & Florin Rd (FS)	Priority: NA	Stop ID: 1864 4 on, 3 off
Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost 8-foot sidewalk or landing needed, per standard; however, acquisition of necessary space appears infeasible		

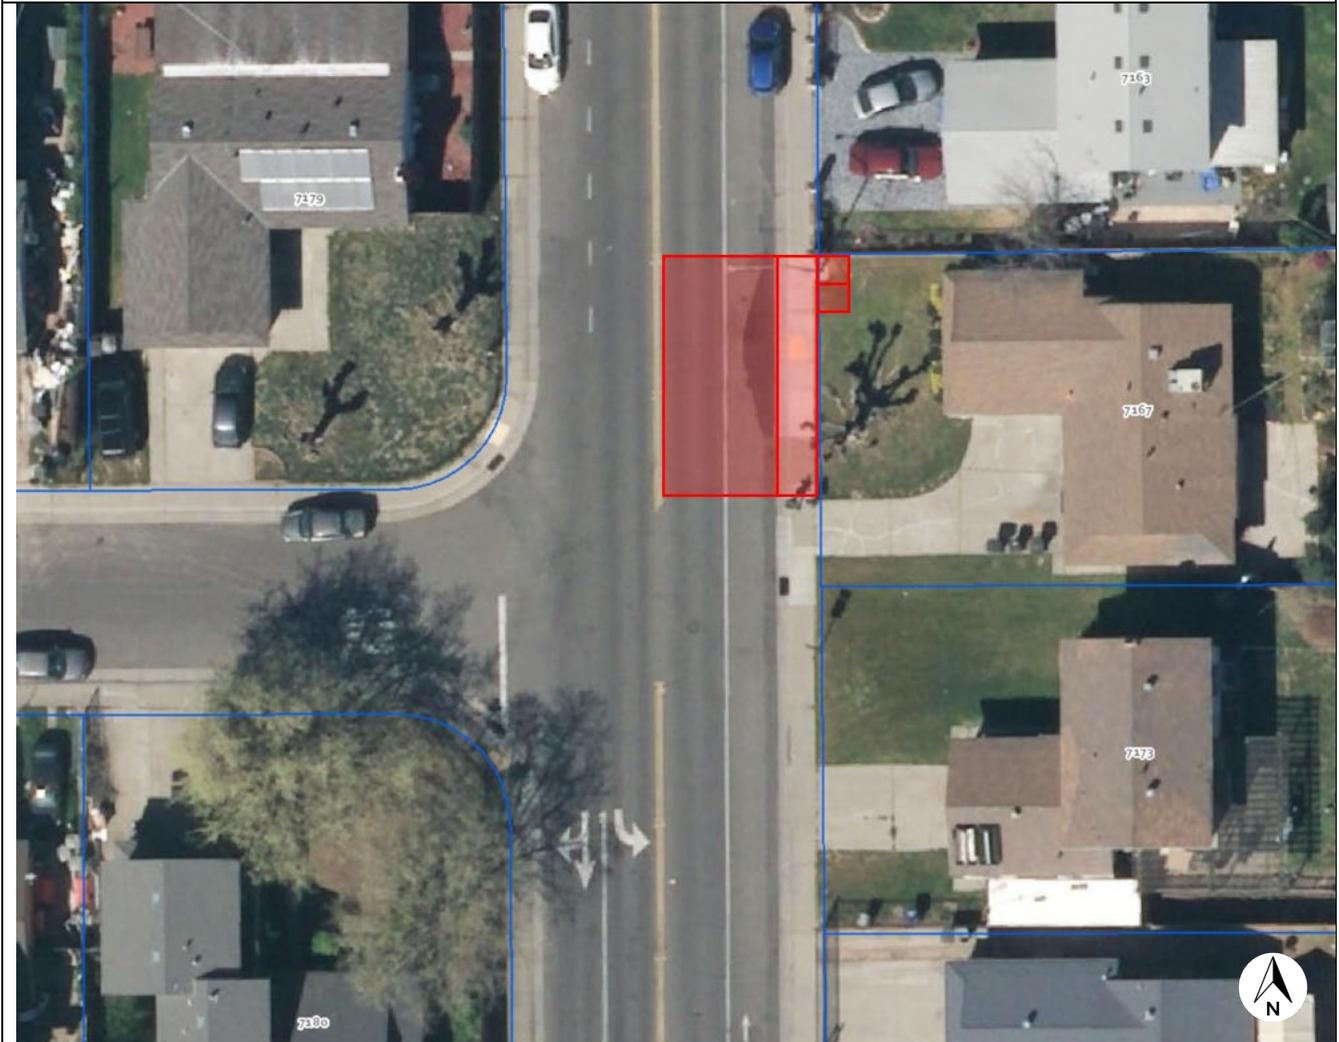

WB Florin Rd & Briggs Dr (FS)	Priority: NA	Stop ID: 2014 11 on, 16 off
Vertical curb and/or sidewalk needed, per standard; however, ridership may not be sufficient to justify cost 8-foot sidewalk or landing needed, per standard; however, acquisition of necessary space appears infeasible		

